DIRECTIONS FOR NEWLY FILLED POOLS: At the st. of the pool season add HOLD at the rate of 1 ounce (approx. 2 level tbs.) per 1,000 gallons of pool water to control algae and bacteria. Test the chlorine residual with a pool test kit and if below 1.0 to 1.5 ppm chlorine residual repeat dosage until 1.0 to 1.5 ppm is obtained. If pool is not stabilized, it can be stabilized by adding 6 ozs. (approximately 12 level tbs.) per 10,000 gallons every other day for at least 4 weeks.

SUBSEQUENT DOSAGE: Subsequently add HOLD at the rate of 3 ozs. (approx. 6 level tbs.) per 10,000 gallons of pool water every other day or as often as needed to maintain a 1.0 to 1.5 ppm chlorine residual. Two level tbs. of HOLD (approx. 1 oz.) per 5,000 gallons of water will provide approximately 1.0 ppm available chlorine

MAINTENANCE OF PH: PH should be maintained in the 7.2-7.6 range. USE A POOL TEST KIT FOR PH AND RESIDUAL CHLORINE DE-TERMINATION.

SUPERCHLORINATION DURING POOL SEASON: During the pool season superchlorinate with 1 oz. of HOLD (approx. 2 level tbs.) per 1,000 gallons of pool water every two weeks when the pool water temperature is below 80°F. and every week when the average pool water temperature is above 80°F. in order to minimize odors, and control algae. Before entering pool, check the chlorine residual with a pool test kit and if above 2.0 ppm, allow the pool to stand until the chlorine residual drops to 2.0 ppm.

HOLD is toxic to fish. Treated effluent should not be discharged where


it will drain into lakes, streams, or ponds. DANGER! AVOID INHALATION OF DUST. DO NOT GET INTO DANGER! AVOID INHALATION OF DUST. DO NOT GET INTO TACT WITH OTHER MATERIAL MAY CAUSE FIRE.

Keep from contact with clothing and other combustible materials. Do not store near combustible materials. Store in tightly closed container. Remove and wash contaminated clothing promptly. While HOLD by itself is not a combustible material, it must not be mixed or contaminated with any foreign material such as household products, soap products, paint products, solvents, acids, pool chemicals, vinegar, beverages, oils, pine oil, dirty rags, etc. Contamination or mixing with these types of chemicals and products may result in fire and the fire can be of great intensity. Prevent any burning material such as a lighted cigarette from falling into product. Drench fires with water. Flush spilled product with water. Keep in a cool dry place in original container. Always replace container lid. Do not reuse empty container. Wash empty container thoroughly with water and discard.

ANTIDOTE: External- flood skin or eyes with plenty of water for 15 minutes. If irritation to skin persists, get medical attention. For eyescall a physician immediately. Internal-drink large quantities of water or milk. Follow with milk of magnesia, vegetable oil, or beaten eggs. Call a physician immediately.



Hypochlorite Products, Olin Corporation, 120 Long Ridge Rd., Stamford, Conn. 06904

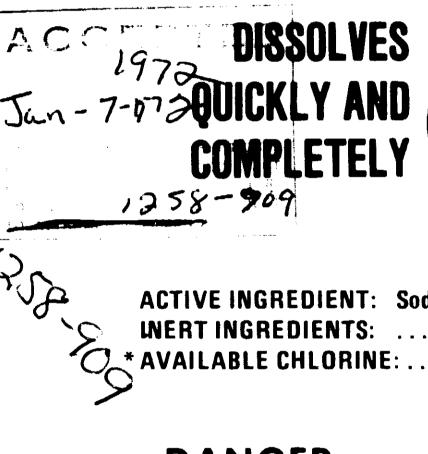

May Be Fatal If Swallowed. May cause eye damage. May Cause Irritation of Skin, Nose, and Throat. Dust May Be Harmful If Swallowed. Mix only with water. Do not mix with any other pool chemicals. May cause fire if contaminated. See antidote statement and other required statement on back panel.

EPA Reg. No. 1258 909



POOL CHLORINE CONCENTRATE



NGREDIENT:	Sodium dichloro-s-triazinetrione.*	99 %
GREDIENTS:		1%
LE CHLORINE		63 %

DANGER: **KEEP OUT OF REACH OF CHILDREN STRONG OXIDIZER**





DIRECTIONS FOR NEWLY FILLED POOLS: At the st. of the pool season add HOLD at the rate of 1 ounce (approx. 2 level tbs.) per 1,000 gallons of pool water to control algae and bacteria. Test the chlorine residual with a pool test kit and if below 1.0 to 1.5 ppm chlorine residual repeat dosage until 1.0 to 1.5 ppm is obtained. If pool is not stabilized, it can be stabilized by adding 6 ozs. (approximately 12 level tbs.) per 10,000 gallons every other day for at least 4 weeks.

SUBSEQUENT DOSAGE: Subsequently add HOLD at the rate of 3 ozs. (approx. 6 level tbs.) per 10,000 gallons of pool water every other day or as often as needed to maintain a 1.0 to 1.5 ppm chlorine residual. Two level tbs. of HOLD (approx. 1 oz.) per 5,000 gallons of water will provide approximately 1.0 ppm available chlorine

MAINTENANCE OF PH: PH should be maintained in the 7.2-7.6 range. USE A POOL TEST KIT FOR PH AND RESIDUAL CHLORINE DE-TERMINATION.

SUPERCHLORINATION DURING POOL SEASON: During the pool season superchlorinate with 1 oz. of HOLD (approx. 2 level tos.) per 1,000 gallons of pool water every two weeks when the pool water tem-perature is below 80°F. and every week when the average pool water temperature is above 80°F. in order to minimize odors, and control algae. Before entering pool check the chloring residual with a most tem algae. Before entering pool, check the chlorine residual with a pool test kit and if above 2.0 ppm, allow the pool to stand until the chlorine residual drops to 2.0 ppm.

HOLD is toxic to fish. Treated effluent should not be discharged where

it will drain into lakes, streams, or ponds. DANGER! AVOID INHALATION OF DUST. DO NOT GET INTO DANGER! AVOID INHALATION OF DUST. DO NOT GET INTO TACT WITH OTHER MATERIAL MAY CAUSE FIRE.


Keep from contact with clothing and other combustible materials. Do not store near combustible materials. Store in tightly closed container. Remove and wash contaminated clothing promptly. While HOLD by itself is not a combustible material, it must not be mixed or contaminated with any foreign material such as household products, soap products, paint products, solvents, acids, pool chemicals, vinegar, beverages, oils, pine oil, dirty rags, etc. Contamination or mixing with these types of chemicals and products may result in fire and the fire can be of great intensity. Prevent any burning material such as a lighted cigarette from falling into product. Drench fires with water. Flush spilled product with water. Keep in a cool dry place in original container. Always replace container lid. Do not reuse empty container. Wash empty container thoroughly with water and discard.

ANTIDOTE: External- flood skin or eyes with plenty of water for 15 minutes. If irritation to skin persists, get medical attention. For eyes-call a physician immediately. Internal- drink large quantities of water or milk. Follow with milk of magnesia, vegetable oil, or beaten eggs. Call a physician immediately.

Olin CHEMICALS

Hypochlorite Products, Olin Corporation, 120 Long Ridge Rd., Stamford, Conn. 06904

HOLD 1271

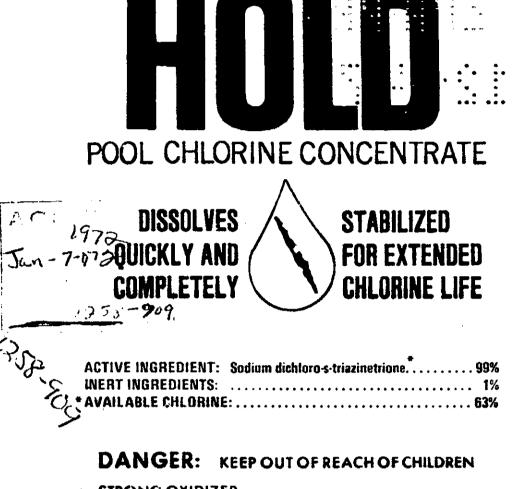

STRONG OXIDIZER

May Be Fatal If Swallowed. May cause eye damage. May Cause Irritation of Skin, Nose, and Throat. Dust May Be Harmful If Swallowed. Mix only with water. Do not mix with any other pool chemicals. May cause fire if contaminated. See antidote statement and other required statement on back panel.

NET WT. 5 LBS.

11

'n

 \sim

EPA Reg No 1258 909

· · · · ·