

DIRECTIONS

For treating dust mops and dust cloths, see directions on the back of the can.

FOR TREATING DUST MOP: Thoroughly spray the top of the dustmop. Do not spray near the ends. Allow to stand until dry. After dustmop has been used, shake mop vigorously out of doors or onto a sheet of newspaper to release the small accumulated black balls. If fine dust comes out of mop, it is an indication that the mop should be treated again. When mop becomes too soiled, it may be rinsed under a stream of warm water and allowed to dry.

Use sparingly, do not saturate the mop. End of mop should not be wet. Follow directions carefully.

FOR DUST CLOTHS: Spray onto cloth from a distance of about 6 inches by moving the aerosol rapidly across the cloth. Fold into several sections and allow to dry. Do not use dust cloth while it is still wet. Dust cloths treated this way may be used to dust furniture, walls, woodwork, table pieces, etc.

When cloths become excessively dirty they may be rinsed out and retreated.

USDA REG. NO. 1270-92



ANTI-STATIC

For
 Treating
DUST MOPS
 •
DUST CLOTHS
 •
AIR CONDITIONING FILTERS

24-12

1374-97

DIRECTIONS

For cleaning and treating air conditioning filters, see directions on the back of the can. Wash with clean water, preferably hot, applied to dirty side of filter. Flush out dirt and old filter spray. Shake off excess water. Allow to dry.

Direct ZEP-O-MIST spray to inlet side of cleaned filter. Coat liberally, but avoid excess which causes run or drip. For best odor removal, coat both sides of filter. Be sure filters are thoroughly dry before applying ZEP-O-MIST.

CAUTION

Harmful or fatal if swallowed.

Flammable.

Contains Petroleum Distillate.

Contents under pressure. Store below 120 F. Do not puncture can. Do not throw into fire or incinerator. Do not use near open flame.

Manufactured by
ZEP MANUFACTURING COMPANY

North Carolina
 Atlanta, Georgia
 Portland, Oregon
 St. Louis, Missouri

DIRECTIONS

Remove cap. Point valve away from face. Push or press valve button.

FOR TREATING DUST-MOP: Thoroughly spray the top of the dustmop. Do not spray near the ends. Allow to stand until dry. After dustmop has been used, shake mop vigorously out of doors or onto a sheet of newspaper to release the small accumulated black balls. If fine dust comes out of mop, it is an indication that the mop should be treated again. When mop becomes too soiled, it may be rinsed under a stream of warm water and allowed to dry.

Use sparingly, do not saturate the mop. Ends of mop should not be wet. Follow directions carefully.


FOR DUST CLOTHS: Spray onto cloth from a distance of about 6 inches by moving the aerosol rapidly across the cloth. Fold into several sections and allow to dry. Do not use dust cloth while it is still wet. Dust cloths treated this way may be used to dust furniture, walls, woodwork, table pieces, etc.

When cloths become excessively dirty they may be rinsed out and retreated.

USDA REG. NO. 1270-92



ZEP-O-MIST

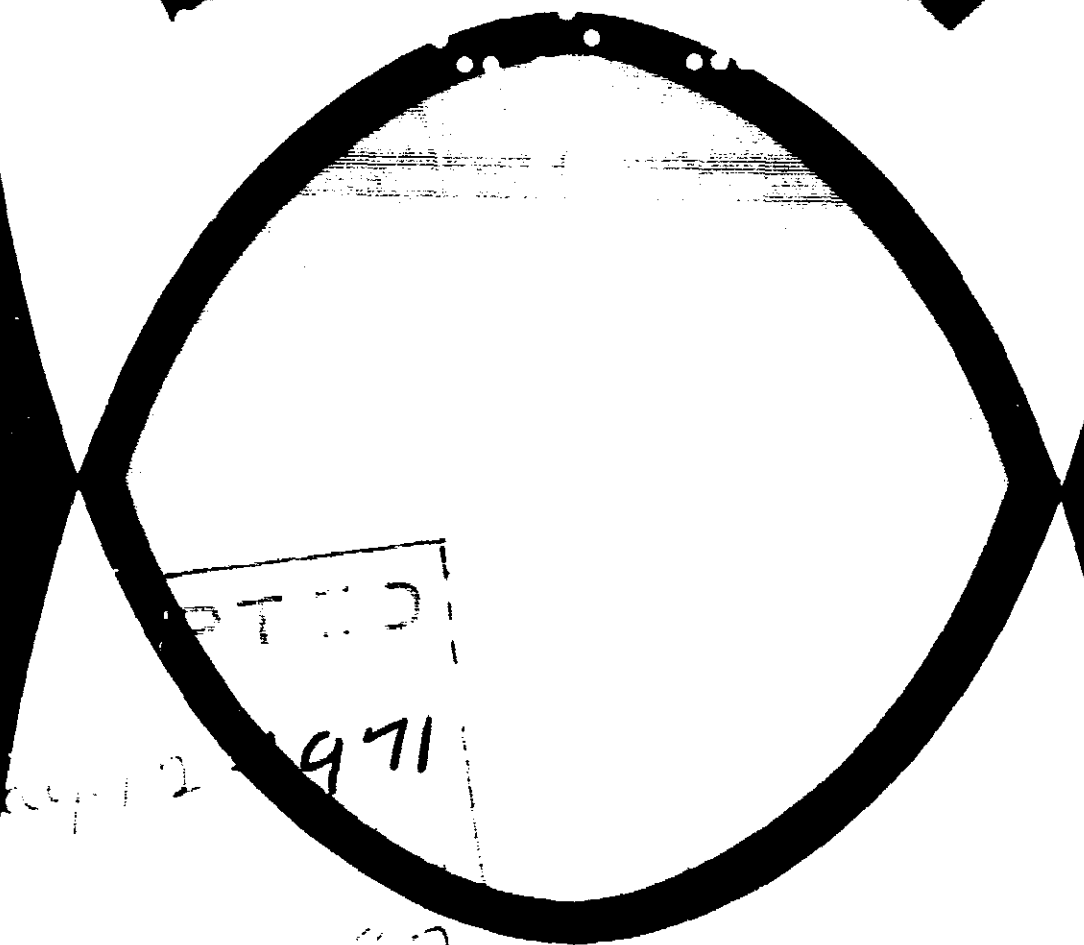

DIRECTIONS

FILTER CLEANING AND COATING: Tap filter gently to remove loose dirt. Wash with stream of water, preferably hot, applied to dirty side of filter. Flush out dirt and old filter spray. Shake off excess water. Allow to dry.

Direct ZEP-O-MIST spray to inlet side of cleaned filter. Coat liberally, but avoid excess which causes run or drip. For best odor removal, coat both sides of filter. Be sure filters are thoroughly dry before applying ZEP-O-MIST.

CAUTION

Harmful or fatal if swallowed.

Flammable.

Contains Petroleum Distillate.

Contents under pressure. Store below 120° F. Do not puncture can. Do not throw into fire or incinerator. Do not use near open flame.

Manufactured by
ZEP MANUFACTURING COMPANY
Division of
National Service Industries, Inc.
ATLANTA, GEORGIA 30301
Plants and Offices Coast to Coast
Canada, Mexico