



Germicide Concentrate

EPA Registration No. 1304-51


GENERAL FARM USES



Livestock and Poultry Houses: Clean areas to be disinfected. Surfaces should be rinsed thoroughly before disinfecting to remove any soap residues. Mix 2 tablespoonfuls (1 oz.) in 4 gallons of water (500 ppm) and spray infected areas. Areas that become contaminated from sick animals should be disinfected with 800 ppm (2 tablespoonfuls per 2 1/2 gallons of water).

Equipment: As a general disinfectant for all equipment including feeders, pans, waterers, slats and automatic medicators, mix 2 tablespoonfuls (1 oz.) in 4 gallons of water (500 ppm) and scrub all surfaces thoroughly.

DAIRY

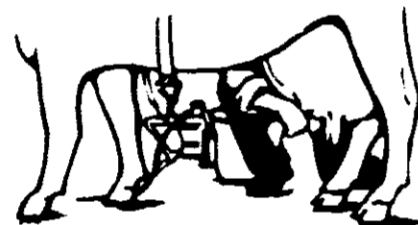


public health officer for their recommended usages.

Equipment, Teat Cups and Utensils: To sanitize dairy equipment, teat cups and utensils use 1 tablespoonful per 5 gallons of water (200 ppm). Apply as a final rinse after cleaning.

Note: Consult your local milk inspector or programs and recommended usages.

SWINE

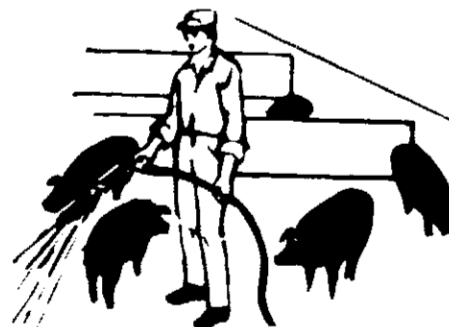

ers, slats, and automatic medicators, mix 2 tablespoonfuls (1 oz.) in 4 gallons of water (500 ppm) and scrub all surfaces thoroughly.

HOMES, RESTAURANTS, HOTELS, FOOD PROCESSING PLANTS

To sanitize equipment, utensils, glasses and silverware use 1 tablespoonful in 5 gallons of water (200 ppm). For general disinfection and deodorization of hard surfaces, other than food contact surfaces or utensils, use 2 tablespoonfuls (1 oz.) in 4 gallons of water (500 ppm).


HATCHING EGGS

For egg washing, dip eggs before incubation using 1 tablespoonful in 5 gallons of water (200 ppm).

Hatchery Equipment: McNess Germicide Concentrate is an effective disinfectant against E. coli, Salmonella and most other disease-causing bacteria of poultry, found on inanimate surfaces. After hatching, clean all equipment and spray or wash walls and floors using 2 tablespoonfuls per 4 gallons of water (500 ppm).

SWIMMING POOLS

Water Treatment for Algae Control: When filling pool at beginning of season, add 1 quart to 30,000 gallons of water (2 ppm). If pool has visible algae growth, repeat within 48 hours after algae debris is removed. A maintenance dose of 2 cups (16 oz.) to 30,000 gallons of water (1 ppm) should be added at least once every 7 days.

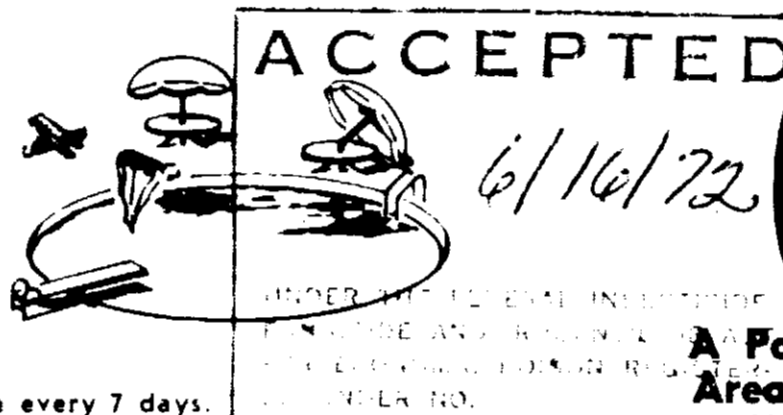

LAUNDRY

For bacteriostatic treatment of bed linens and diapers and to control odors in clothes add 1 tablespoonful to each 5 gallons of water (200 ppm) in final rinse.

DIAPER PAILS

To control odor add 1/2 tablespoonful to 2 1/2 gallons of water (200 ppm).

DANGER

Corrosive. Causes severe eye and skin damage. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food. Rinse empty container thoroughly with water and discard it.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.



DISINFECTANT
SANITIZER
DEODORIZER

GERMICIDE CONCENTRATE

A Powerful Germicide for use in Poultry and Swine Areas, in Dairies, and for General Farm and Home Use. Fast Acting. Effective in Hard Water.*

ACTIVE INGREDIENTS:

n-Alkyl (60% C ₁₄ , 30% C ₁₂ , 5% C ₁₃ , 5% C ₁₅)	
dimethyl benzyl ammonium chlorides	12.5%
n-Alkyl (68% C ₁₂ , 32% C ₁₄)	
dimethyl ethylbenzyl ammonium chlorides	12.5%

INERT INGREDIENTS:

75.0%

Guaranteed Minimum Phenol Coefficients by A.O.A.C. Test Method at 20° C.

Staphylococcus Aureus	228
Salmonella Typhosa	153

Non-Flammable, Non-Volatile, Odorless
Non-Corrosive to inanimate surfaces in use dilutions

DANGER: KEEP OUT OF REACH OF CHILDREN
READ OTHER PRECAUTIONS ON BACK PANEL

*Hard water tolerance 750 ppm as calcium carbonate

Furst-McNess Co., Freeport, Ill. 61032

32 FL. OZ. (ONE QUART)