

Ready-To-Use

Penta

Chlorophenol

Wood Preservative

Weldwood®

PREPARATION

Applying glue and staining should be completed before Penta is applied. Wood should also be clean and dry.

APPLICATION

1. Temperature of wood and Penta must be above 40°F (4°C).
2. Wood to be used above grade may be treated by the following: Penta used on the surface, paying special attention to the end grain areas, end and side grain.
3. Wood to be in contact with soil should be soaked 24 hours or wetted daily with butted down. A cedar bark should be removed from any surface cut after the first treatment. It should be kept

TERMITE CONTROL

New construction. Wood to be treated with Penta should be treated with Penta before it is installed. Saw wood 1/4 to 1/2 inch thick, 1/2 to 1 inch wide, 1/2 to 1 inch deep, and protect by the following: Wood framing or spray application should be applied to all surfaces of the wood. When using Penta, the wood should be treated with Penta on all surfaces, including the end grain.

Existing structures. Repairs to existing structures should be treated with Penta before they are installed. Wood to be treated with Penta should be treated with Penta on all surfaces, including the end grain.

POWDER POST BEETLE, MOLD, CARPENTER ANT DECAY AND MILDEW CONTROL

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

COVERAGE

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

DRYING TIME

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

THINNING

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

CLEAN-UP

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.


Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

Apply Penta to all surfaces of the wood to be treated. Penta should be applied to all surfaces of the wood, including the end grain.

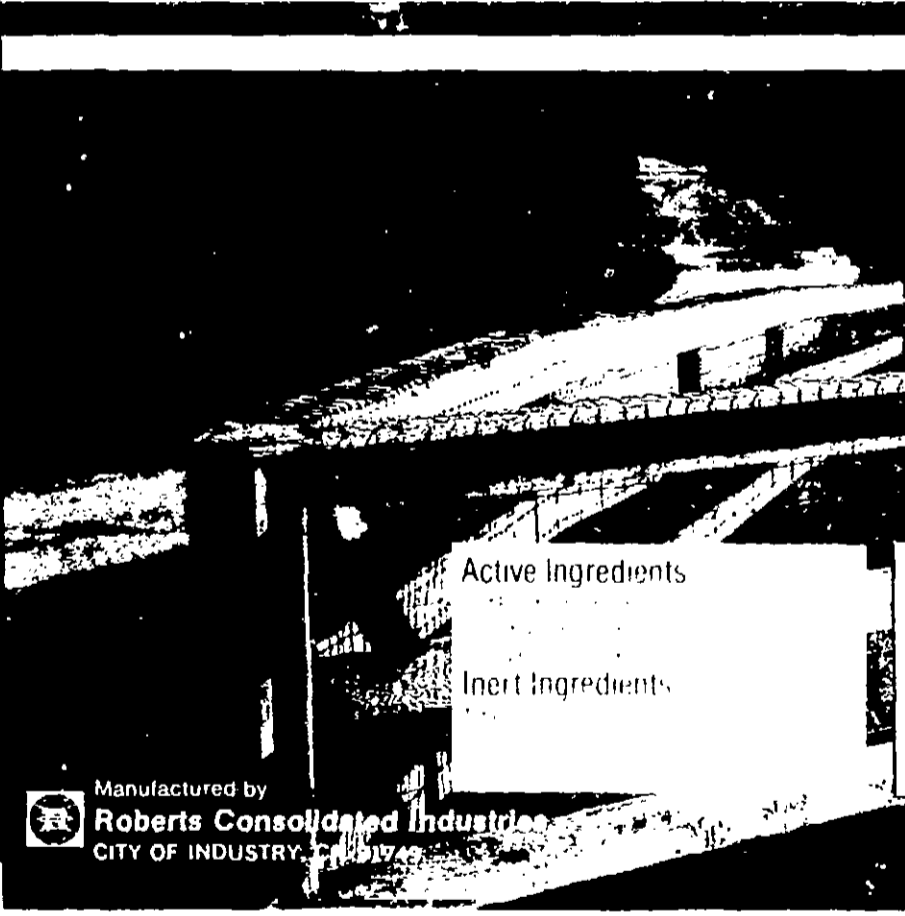

**FOR WOOD NOT TO BE PAINTED OR FINISHED
DO NOT DILUTE
PROTECTS AGAINST DECAY
MILDEW, AND WOOD DESTROYING INSECTS**

Active Ingredients

Inert Ingredients



Manufactured by
Roberts Consolidated Industries
CITY OF INDUSTRY, CA 91749

WARNING!
KEEP OUT OF REACH OF
KEEP AWAY FROM HEAT
HARMFUL OR FATAL IF SWALLOWED
THROUGH SKIN • CAUSES IRRITATION
Read Caution and First Aid Statement

Net Cont. 1 U.S. gallon (3.78 liters)

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS (AND DOMESTIC ANIMALS)**

WARNING!

**KEEP OUT OF REACH OF CHILDREN.
HARMFUL OR FATAL IF SWALLOWED
OR ABSORBED THROUGH SKIN
CAUSES EYE AND SKIN IRRITATION**

**AVOID REPEATED SKIN CONTACT. WEAR RUBBER
GLOVES AND PROTECTIVE CLOTHING WHEN APPLYING
OR HANDLING FRESHLY TREATED LUMBER.**

For a READY TO USE...
...
...
...
...

...
...
...
...
...
...
...
...
...
...

ENVIRONMENTAL HAZARDS

STORAGE AND DISPOSAL

DIRECTIONS FOR USE

USES

...
...
...
...
...
...
...
...
...
...

Roberts Consolidated Industries
2305 Superior Avenue
Kalamazoo, MI 49001

Attention: Mr. D. R. Kurt

Gentlemen:

Subject: Penta Chlorophenol Wood Preservative
Ready to Use
EPA Registration No. 1409
Your letter dated December 1, 1977

The labeling referred to above is acceptable under the Federal Insecticide, Fungicide, and Rodenticide Act and is acceptable. A stamped copy is enclosed.

At the next printing of your label, Statement, change "Keep out...ponds" to "Keep out...water".

Enclosure

TS-767:HFJ:Jacoby:DCR-03361:WANG-065