


WOODLIFE®

Contains Pentachlorophenol

WATER REPELLENT PRESERVATIVE FOR WOOD

CONCENTRATE - CLEAR
BEFORE USING DILUTE BY ADDING
3 PARTS MINERAL SPIRITS TO
1 PART CONCENTRATE

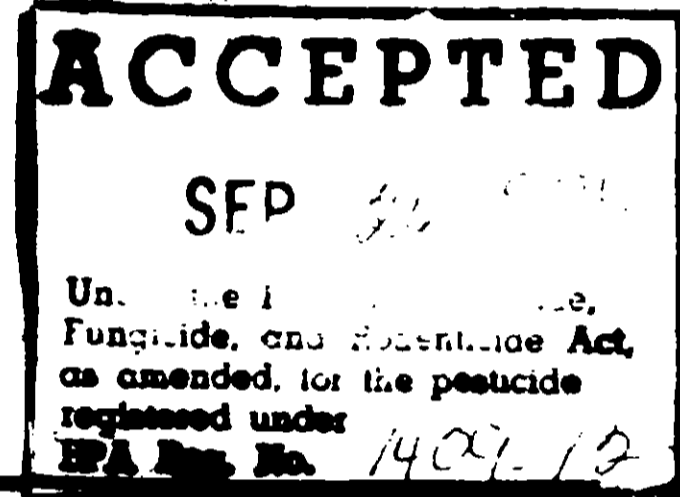

WARNING! COMBUSTIBLE!
KEEP OUT OF REACH OF CHILDREN.
KEEP AWAY FROM HEAT OR OPEN FLAME.
HARMFUL OR FATAL IF SWALLOWED OR
ABSORBED THROUGH SKIN.

Contains Petroleum Distillate. Keep contents and freshly treated articles away from flame, food and living plants. Do not use, pour, spill or store near heat or open flame. Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place away from water supplies.

Causes skin irritation. Do not breathe vapor or spray mist. Do not get in eyes or on skin or clothing. Use only in well ventilated area.
Wear rubber gloves and protective clothing when handling the freshly treated lumber. Not for use or storage in or around the home.
This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this product only as specified on this label.

FIRST AID: External — Wash with soap and water. Internal — Call a physician immediately. Force vomiting by drinking warm water mixed with a tablespoon of salt, milk or egg white. Lie down and keep warm.

ACTIVE INGREDIENTS:	
Pentachlorophenol	14.6%
Other Chlorophenols	1.7%
INERT INGREDIENTS	83.7%
TOTAL	100.0%

Equivalent to 17% technical grade pentachlorophenol in accordance with Fed. Spec. TT-W-570

WHEN DILUTED, MEETS FED. SPEC. TT-W-572B COMPOSITION A INDUSTRIAL STANDARD IS-4-70

NOTICE: SELLER MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, IN LAW OR IN FACT, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR USE, except that specifically set forth on this label. Buyer assumes all risks of use, handling or storage of this product when such use, handling or storage is not in strict accordance with the provisions of this label.

DIRECTIONS (After Dilution)

DESCRIPTION: WOODLIFE is a clean, penetrating, non-swelling, paintable, water repellent preservative for wood. It protects against wood destroying fungi, staining fungi and dimensional change.

PRODUCT USES: Millwork, shingles, siding, structural lumber, fences, outside furniture, all lumber and wood products. Do not use on interior surfaces which are not to be finished.

RETENTION: 3-minute immersion — 5-10 gallons per MBM. 30-minute immersion — 10-15 gallons per MBM. 24 hours immersion — 15-25 gallons per MBM. Brush application — 150 sq. ft. per gallon; but varies by species and condition of wood.

PREPARATION: Machine, cut, glue and sand wood, as desired, before treating. Do not use over previously finished or stained wood without stripping off old finish. Wood must be clean and dry. Do not use steel wool. Keep solution and freshly treated wood away from plastics and asphalt products. Fence posts, foundation timbers and heavy woodwork members should be free of bark, dry and well-seasoned.

APPLICATION: Use only at 40°F. (4.4°C) surrounding temperature, or above. Apply by immersion, Dri Vac vacuum, roller coater, flood spray or brush. For application by roller, spray or brush, two successive coats should be applied to all wood to be in contact with soil. Apply second coat before first coat is completely dry.

IMMERSION: Millwork or other items to be painted — 3 minutes for batch or bundle treating, 30 seconds for plywood, 15 seconds for treating individual parts. Treatment should be in accordance with Industrial Standard 4-70. Wood to be in contact with soil, immerse 24 hours, posts for 48 hours.

FINISHING: Before glazing, painting or varnishing, treatment should be completely dry and odor free. Allow 24-48 hours under average temperature and humidity conditions. Can be heat dried for plant production. Use a sealer such as shellac before using lacquers.

CLEAN-UP: Use mineral spirits to clean immersion tanks, spray equipment and surrounding area. Lacquer thinner may be required to remove dried WOODLIFE from floors and equipment.

Manufactured by

 **Roberts Consolidated Industries**
Subsidiary of Champion International
CITY OF INDUSTRY, CA 91749

Net Contents: 55 Gallons
U.S. Measure
(208.2 Liters)

DO NOT REUSE CONTAINER — DESTROY WHEN EMPTY

EPA Est. No. 1409-MI 1
EPA Reg. No. 1409-12
Made in U.S.A./Printed in U.S.A.