

MARINE WOODLIFE®

Contains Copper Naphthenate

WATER REPELLENT PRESERVATIVE FOR WOOD

CONCENTRATE - MARINE
BEFORE USING DILUTE BY ADDING
2 PARTS MINERAL SPIRITS TO
1 PART CONCENTRATE

CAUTION! COMBUSTIBLE!
KEEP OUT OF REACH OF CHILDREN.
KEEP AWAY FROM HEAT OR OPEN FLAME.
HARMFUL OR FATAL IF SWALLOWED OR
ABSORBED THROUGH SKIN.
Contains Petroleum Distillate. Keep contents and freshly treated articles away from flame, food and living plants. Do not use, pour, spill or store near heat or open flame. Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place away from water supplies.

Causes skin irritation. Do not breathe vapor or spray mist. Do not get in eyes or on skin or clothing. Use only in well ventilated area. Not for use or storage in or around the home.

This product is toxic to fish. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this product only as specified on this label.

FIRST AID: External — Wash with soap and water. Internal — Call a physician immediately. Force vomiting by drinking warm water mixed with a table-spoon of salt, milk or egg white. Lie down and keep warm.

ACTIVE INGREDIENTS:
Copper Naphthenate 34.6%
(Equiv. to 2.6% metallic copper)
INERT INGREDIENTS 65.4%
TOTAL 100.0%
MEETS FED. SPEC. TT-W-572B, COMPOSITION B

NOTICE: SELLER MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, IN LAW OR IN FACT, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR USE, except that specifically set forth on this label. Buyer assumes all risks of use, handling or storage of this product when such use, handling or storage is not in strict accordance with the provisions of this label.

Manufactured by



Roberts Consolidated Industries
Subsidiary of Champion International
CITY OF INDUSTRY, CA. 91749

Net Contents: 55 Gallons
U.S. Measure
(208.2 Liters)

DO NOT REUSE CONTAINER — DESTROY WHEN EMPTY

EPA Est. No. 1409-MI-1
EPA Reg. No. 1409-13
Made in U.S.A./Printed in U.S.A.

DIRECTIONS (After Dilution)

DESCRIPTION: MARINE WOODLIFE is a penetrating, non-swelling, paintable, water repellent preservative for wood. Protects against wood destroying fungi, staining fungi and dimensional change.

PRODUCT USES: Boats, docks, piers, structural lumber, all lumber and wood products in a marine environment.

RETENTION: 3 minute immersion — 5-10 gallons per MBM. 30 minute immersion — 10-15 gallons per MBM. 24 hour immersion — 15-25 gallons per MBM. Brush application — 150 sq. ft. per gallon, but varies by species and condition of wood.


PREPARATION: Machine, cut, glue and sand wood, as desired, before treating. Do not use over previously finished or stained wood without stripping off old finish. Wood must be clean and dry. Do not use steel wool. Keep solution and freshly treated wood away from plastics and asphalt products. Fence posts, foundation timbers and heavy wood members should be free of bark, dry and well-seasoned.

APPLICATION: Use only at 40°F. (4.4°C) surrounding temperature or above. Apply by immersion, roller coater, flood spray or brush.

IMMERSION: Items to be painted or finished, immerse for 3 minutes. Plywood for 30 seconds. Wood to be in contact with soil, immerse 24 hours, posts 48 hours.

FINISHING: Before finishing, treatment should be completely dry and odor free. Allow at least 48 hours under average temperature and humidity conditions. Can be heat-dried for plant production. Use a sealer such as shellac before using lacquers. Green color may bleed through first coat of white paint, but finish coats will cover.

CLEAN-UP: Use mineral spirits to clean immersion tanks and surrounding area. Lacquer thinner may be required to remove dried MARINE WOODLIFE from floors and equipment.

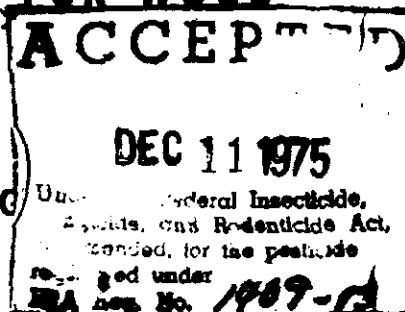

PM 21

1409-13

1409-13