

PREPARATION

All cutting, grinding and sanding should be done before applying Marine Woodlife. Wood should be clean and dry. Do not use on previously finished or stained wood without stripping off the old finish. Do not use steel wool.

APPLICATION

1. Temperature of lumber and Marine Woodlife must be above 40 F (4.40 C)
2. Treat all surfaces with fish oil first.
3. Treat wood with Marine Woodlife until a puddle remains on surface.
4. Coat side and end grain three or more times to give full protection.
5. Apply two coats to any wood for continued use below the waterline. Apply second coat 24 to 48 hours later.
6. Any surface not after first treatment should be retreated.
7. Some stains may bleed through a coat of light colored paint, but finish coat will

COVERAGE

100 sq. ft. per gallon (94 sq. m. per gallon) with brush or roller application.

DRYING TIME

24 to 48 hours before applying a finish.

THINNING

Not recommended.

CLEANUP

Wash brushes with turpentine. Use mineral spirits to remove wet Marine Woodlife from surfaces. Do not use turpentine on surfaces until they are dry when product has dried.

IMPORTANT NOTICE TO PURCHASER: Buyer assumes all risk of use, handling and storage of product not in strict accordance with label directions. No express warranties are given. Should defect occur, Seller's sole liability is to replace product or refund purchase price.

ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR USE IS LIMITED TO ONE YEAR FROM DATE OF PURCHASE. LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LOSSES IS HEREBY EXCLUDED AT ALL TIMES. It is used for other than general farm or household purposes and implied warranty of MERCHANTABILITY or FITNESS FOR PARTICULAR USE is excluded. © Roberts Consolidated Industries 1974.



Roberts Consolidated Industries
CITY OF INDUSTRY, CA 91749

Weldw

Marine WOOD WOOD PRES

Water Repellent Preservative For
Protects Against Decay, Fungi and


ACTIVE INGREDIENTS
Copper Naphthenate
(Equivalent to 1% metallic copper)
INERT INGREDIENTS

TOTAL Meets Federal Specs TT-W-572B

WARNING!

KEEP OUT OF REACH OF CHILDREN
KEEP AWAY FROM HEAT OR
HARMFUL OR FATAL IF SWALLOWED
THROUGH SKIN • CAUSES EYE IRRITATION
Read Caution and First Aid Statements

Net Cont. 1 U.S. gallon (3.78 liters)

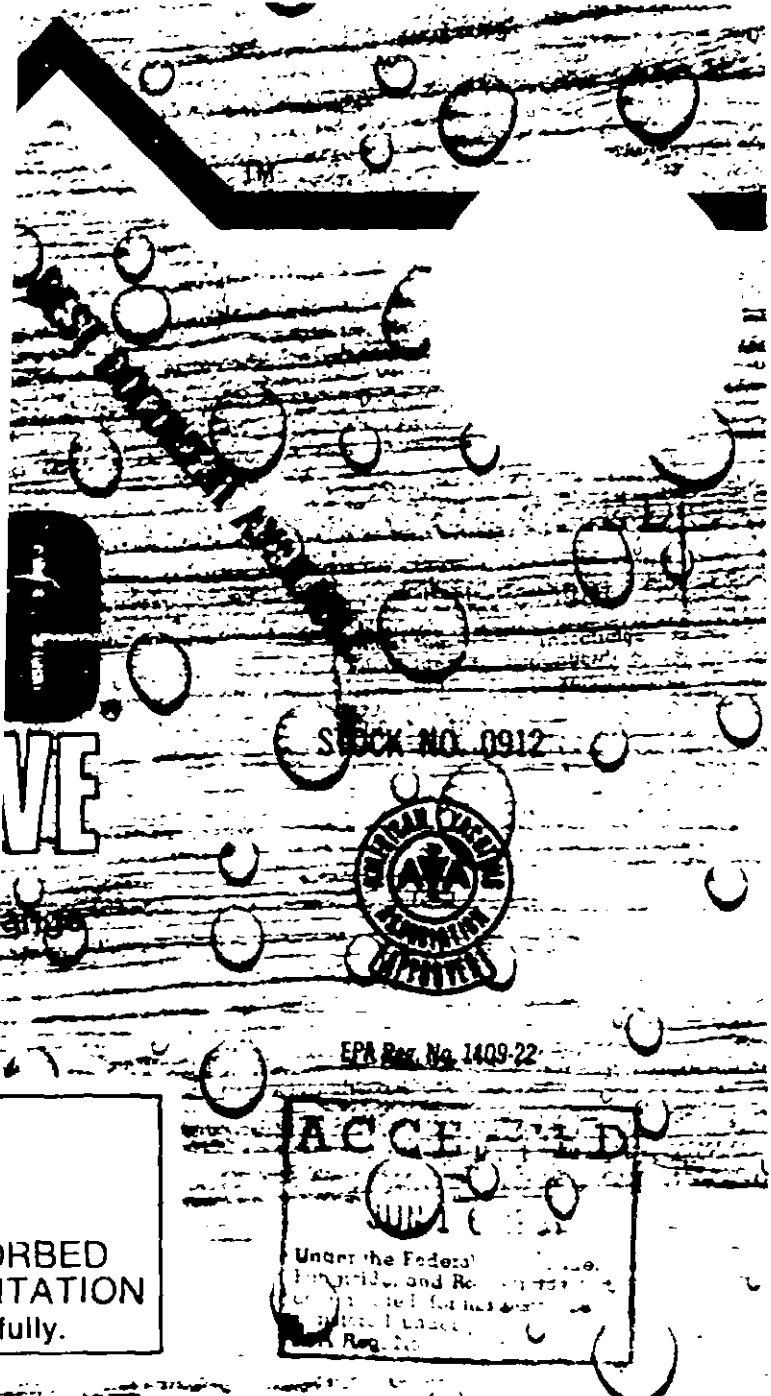

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS (AND DOMESTIC ANIMALS)**

WARNING!

**KEEP OUT OF REACH OF CHILDREN.
HARMFUL OR FATAL IF SWALLOWED
OR ABSORBED THROUGH SKIN.
CAUSES EYE AND SKIN IRRITATION.**

Marine Woodlife contains Copper Naphthenate and Petroleum Spirits. Keep contents and freshly treated articles away from flame, food and living plants. Do not use, pour, spill or store near heat or open flame. Use only in well ventilated area. Do not breathe vapor or spray mist. Do not get in eyes, or on skin or clothing. Wear rubber gloves and protective clothing when applying or handling freshly treated lumber.

FIRST AID: If on skin, wash with soap and water. Remove and wash contaminated clothing before reuse. If in eyes, immediately flood with water for at least 15 minutes. Call a physician. If swallowed, give 1 or 2 glasses of water and induce vomiting by touching back of throat with finger or blunt object. Do not induce vomiting or give anything by mouth to an unconscious person. Call a physician.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste.

STORAGE AND DISPOSAL

Do not use or store inside the home. Do not reuse empty container. Wrap container and put in trash collection.

OUTSTANDING FEATURES:

- Water repellent - Reduces swelling and shrinking
- Protects against decay, warping, and fungi stain
- Ready to-use
- Adds years of life to wood
- Paintable
- Green in color
- Odorless when dry

DIRECTIONS FOR USE

Apply this product only as specified on this label. It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

USES

Marine Woodlife is a penetrating water repellent wood preservative for all wood parts of boats which will come into continued prolonged contact with salt water, docks, piers, structural lumber, posts and pilings used in a salt water environment. It protects wood against decay fungi (like brown or white rot), staining fungi (like blue stain), surface mildew (like black, brown or other colored mildew) and dimensional change. Use a sealer such as she lac after treatment before using lacquers. Keep solution and freshly treated wood away from plastics, asphalt shingles and tiles.

100-104-10-01

82

ORBED
ITATION
fully.

Under the Federal
Insecticide, and Fungicide Act of 1947