

PA 21 1409-22 1/5

DAP Marine Woodlife Wood Preservative with Water Repellent

Green

3 - Way Protection

- * Decay fungi protection
- * Mildew protection
- * Water repellent surface protection

Paintable

Active Ingredient:	
Copper Naphthenate*	10.0%
Inert Ingredients	90.0%
	<hr/>
Total	100.0%

* (Equivalent to 1.0% metallic copper)

Contains Petroleum Distillates

Meets the performance requirements of Federal Specs. TT-W-572B, Composition B

EPA Reg. No. 1409-22
EPA Est. No. 1409-OH-1


KEEP OUT OF REACH OF CHILDREN

WARNING!

Keep away from heat or open flame.
Harmful or fatal if swallowed or absorbed through skin.
Causes eye and skin irritation

See Back Panel for Additional Precautionary Statements.

One U.S. Gallon (3.78 liters)

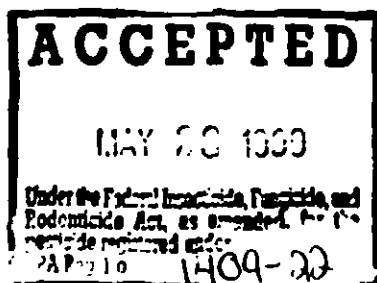

8/14/89

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

WARNING!

**HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN
CAUSES EYE AND SKIN IRRITATION**

DAP Marine Woodlife contains Copper Naphthenate and Petroleum Spirits. Use only in well ventilated area. Do not breathe vapor. Do not get in eyes, or on skin or clothing. Wear rubber gloves and protective clothing when applying or handling freshly treated lumber. Wash thoroughly with soap and water after skin contact, especially before eating, drinking or use of tobacco products. Remove contaminated clothing and wash before reuse.

FIRST AID

If on skin - Wash with plenty of soap and water.

If in eyes - Flush eyes with plenty of water. Call a physician.

If swallowed - Call a physician or Poison Control Center. Do not induce vomiting.

If inhaled - Remove victim to fresh air. If not breathing, administer artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Do not apply directly to water. Do not apply directly to water. Do not contaminate water when disposing of equipment washwaters.

PHYSICAL AND CHEMICAL HAZARDS

Do not use, pour or store near heat or open flame. Keep contents and freshly treated articles away from flame.

9/14/89

STORAGE AND DISPOSAL

STORAGE: Store in original container. If stored in house, keep in locked storage area. Do not store near heat or open flame. Keep contents away from food and feed.

HOUSEHOLD: Do not reuse empty container. Securely wrap container in several layers of newspaper and discard in trash.

COMMERCIAL:

PESTICIDE DISPOSAL: Wastes resulting from use of this pesticide may be disposed of on site or at an approved waste disposal facility. Do not contaminate water, food or feed by storage or disposal.

CONTAINER DISPOSAL: TRIPLE RINSE (or equivalent), Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

9/14/89

PRODUCT INFORMATION

- * Water repellent...Reduces swelling and shrinking.
- * Protects against decay, warping, and fungal stain.
- * Ready-to-use.
- * Adds years of life to wood.
- * Paintable.
- * Green in color.
- * Odorless when dry.

USES

DAP Marine Woodlife is a penetrating water repellent wood preservative for all wood parts of boats and wood which comes into continued prolonged contact with salt water, such as docks, piers, structural lumber, posts and pilings. It protects wood against decay fungi (like brown or white rot), staining fungi (like blue stain), surface mold (like black, brown or other colored mildew) and dimensional change. Use a sealer such as shellac after treatment before using lacquers. Keep solution of freshly treated wood away from plastics, asphalt shingles and tiles.

COVERAGE

100 to 150 sq. ft. (9.29 to 13.94 sq. m) per gallon with brush or roller application.

LIMITED WARRANTY

Buyer assumes all risks of use, handling and storage of product not in strict accordance with label directions. Any implied warranty of MERCHANTABILITY OR FITNESS FOR PARTICULAR USE is excluded. Liability for any incidental or consequential damage or loss is specifically excluded at all times. Seller will not accept liability for more than product replacement. Some states do not allow limitations on how long implied warranties last nor exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

9/14/89

6/5

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Apply this product only as specified on this label. Keep contents and freshly treated articles away from food and living plants.

PREPARATION

All cutting, gluing and sanding should be done before applying DAP Marine Woodlife. Wood must be clean and dry. Do not use over previously finished or stained wood without stripping off the old finish. Do not use steel wool.

APPLICATION

1. Temperature of lumber and DAP Marine Woodlife must be above 40 F (4.40 C).
2. Apply product with brush or roller. Do not spray. NOTE: For wood which comes into continued, prolonged contact with salt water, such as docks, piers, structural lumber, posts and pilings, a 12 to 48 hour soak in DAP Marine Woodlife is recommended.
3. Flood wood with DAP Marine Woodlife until puddles remain on the surface. Be sure that all surfaces are completely covered.
4. Fully saturate side and end grains to give maximum protection.
5. Apply two coats to any wood for continued use below the water-line. Apply second coat before the first coat is dry.
6. Any surface cut after first treatment should be retreated.
7. Green color may bleed through on initial coat of light colored paint, but finish coat will cover.

DRYING TIME

Let air dry a minimum of 48 hours before applying finish.

READY TO USE

No thinning is required.

CLEAN UP

Use DAP Cleaner and Thinner or mineral spirits to remove wet DAP Marine Woodlife from all surfaces, brushes and rollers. Lacquer thinner may be used when product has dried.

(DAP LOGO)

For the Jobs You Only
Want To Do Once.

DAP, Inc. Dayton, Ohio 45401
A Subsidiary of USG Corporation

Made and Printed in USA

9/14/89