



LIFEPRIME® REDWOOD

PENETRATING, PAINTABLE

WATER REPELLENT PRESERVATIVE, PRIMER FOR WOOD

READY - TO - USE

DO NOT DILUTE

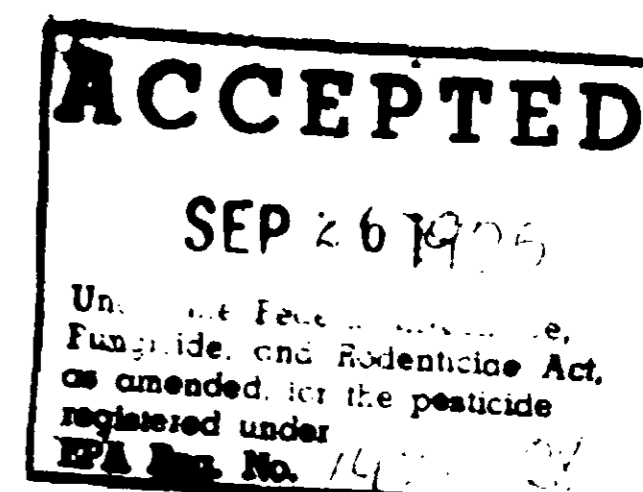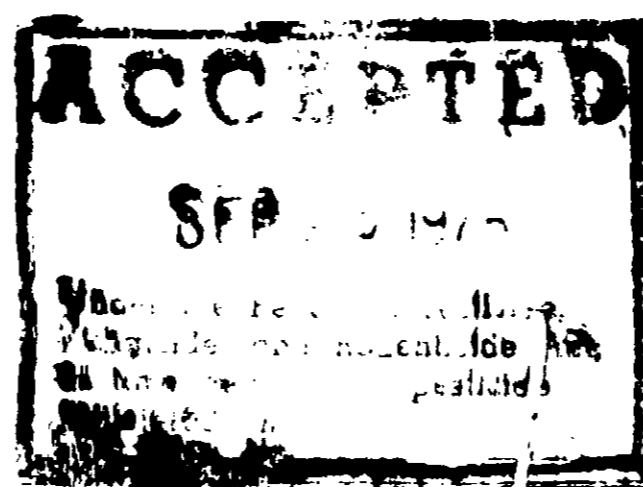

DIRECTIONS

DESCRIPTION: LIFEPRIME, Redwood is a paintable, penetrating, non-swelling, pigmented, water repellent preservative stain for wood. It protects against wood destroying fungi, staining fungi and dimensional change.

PRODUCT USES: Formulated especially for dip application to wood products such as fences, posts, guard rails, siding and shakes.

RETENTION: 3 minute immersion — 5-10 gallons per MBM. Brush or spray — 165 sq. ft. per gallon; but varies by species and condition of wood.

PREPARATION: Machine, cut, glue and sand wood as desired before treating. Do not use over previously finished or stained wood without stripping off old finish. Wood must be clean and dry. Do not use steel wool. Keep solution and freshly treated wood away from plastics and asphalt products. Fence posts, foundation timbers and heavy wooden members should be free of bark, dry and well-seasoned, and immersed in product for a period of 12 to 48 hours to ensure effective wood preservation.

APPLICATION: Use only at 60° F (15.5°C) surrounding temperature, or above. Apply by immersion, flood spray or brush. For application by flood spray or brush, two successive coats should be applied to all wood in contact with soil. Apply second coat before first coat is completely dry. Agitate repeatedly during use.

FINISHING: Before glazing, painting or varnishing, treatment should be completely dry and odor free. Allow 24-48 hours under average temperature and humidity conditions. Can be heat dried for plant production. Use a sealer such as shellac before using lacquers.

CLEAN-UP: Use mineral spirits to clean immersion tanks, spray equipment and paint brushes. Wash thoroughly with water.

FIRST AID: External — Wash with soap and water. Internal — Call a physician immediately. Force vomiting by drinking warm water mixed with a tablespoon of salt, milk or egg white. Lie down and keep warm.

ACTIVE INGREDIENTS	
Pentachlorophenol	4.3
Other Chlorophenols	5
INERT INGREDIENTS	95.7
TOTAL	100.0
Equivalent to 5.0% technical grade pentachlorophenol in accordance with Fed. Spec. TT-W-77	

NOTICE: SELLER MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, IN LAW OR IN FACT, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR USE, except that specifically set forth on this label. Buyer assumes all risks of use, handling or storage of this product when such use, handling or storage is not in strict accordance with the provisions of this label.

WARNING! COMBUSTIBLE!
KEEP OUT OF REACH OF CHILDREN.
KEEP AWAY FROM HEAT OR OPEN FLAME.
HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN.
Contains Petroleum Distillate. Keep contents and freshly treated articles away from flame, food and living plants. Do not use, pour, spill or store near heat or open flame. Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place away from water supplies.

Causes skin irritation. Do not breathe vapor or spray mist. Do not get in eyes or on skin or clothing. Use only in well ventilated area.
Wear rubber gloves and protective clothing when handling the freshly treated lumber. Not for use or storage in or around the home.
This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this product only as specified on this label.

Manufactured by
Roberts Consolidated Industries
Subsidiary of Champion International
CITY OF INDUSTRY, A. I. I. I.

Net Contents 55 Gallons
U.S. Measure
(208.2 Liters)

DO NOT REUSE CONTAINER - DESTROY WHEN EMPTY