

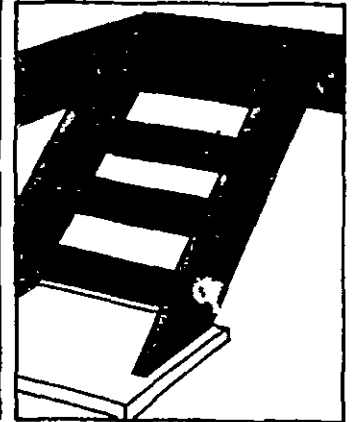
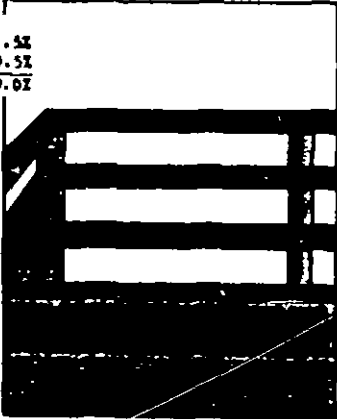
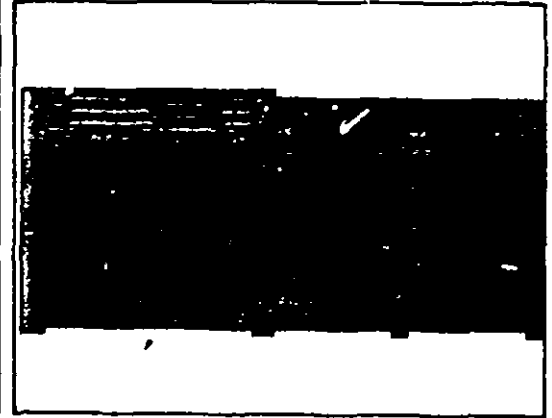


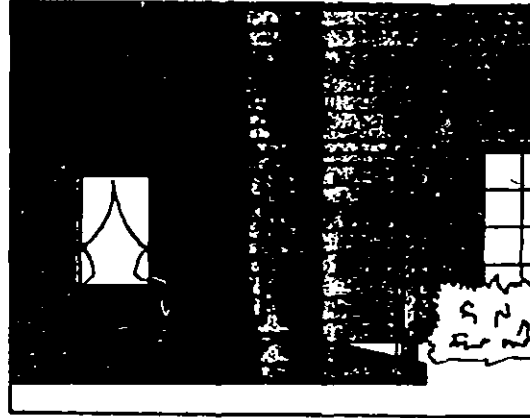

# Wood Protector™

## Water Repellent/Wood Preservative

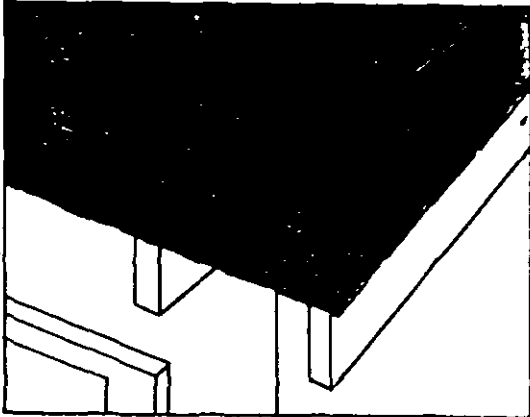

- Paintable ■ Ready-to-Use ■ Clear
- Reduces Swelling and Shrinking
- Protects Against Mold, Mildew, Rot, Decay

**WARNING!**  
 KEEP OUT OF REACH OF CHILDREN • KEEP AWAY FROM HEAT OR OPEN FLAME • HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN • CAUSES EYE AND SKIN IRRITATION  
 Read Caution and First Aid Statements on Side Panels Carefully.

Active Ingredient	
Di-(tributyltin) Oxide....	52
Water Degradation.....	99.52
Other Degradation.....	100.02

**Net Cont.**  
**1 U.S. Gallon**  
**(3.78 Liters)**

ACCEPTED  
with COMMENTS  
EPA Letter Dated

FEB 22 1985

er the Federal Insecticide,  
icide, and Rodenticide Act  
amended, for the pesticide  
erod under EPA Reg. No.  
1409-31

### Product Information

Wood Protector™ is a penetrating water repellent and wood preservative for use on exterior wood. It provides protection from mold, mildew, rot and decay, and lengthens the life of structural lumber, shingles, shakes, millwork, siding, windows, door, fences and outdoor furniture. Wood Protector™ may be applied to wood prior to paints, stains and varnish to increase their resistance to peeling and blistering.

### Uses and Limitations

Wood Protector™ will protect wood from swelling and shrinking. Keep solution and freshly treated wood away from plastics, asphalt shingles and tiles. **DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD. DO NOT USE ON INTERIOR WOOD OR WOOD WHICH WILL COME IN CONTACT WITH THE SKIN, UNLESS THE WOOD IS SEALED WITH PAINT, VARNISH OR SHELLAC AFTER TREATMENT.**

### Directions for Use

#### Preparation

All cutting, gluing and sanding should be done before applying WOOD PROTECTOR™. Wood must be clean and dry. Do not use over previously finished or stained wood without stripping off the old finish. Do not use steel wool.

#### Application

1. Temperature of the lumber and Wood Protector™ must be above 40°F (4.4°C). No thinning is required.
2. Treatment may be done by brush or roller.
3. One gallon will cover 100 to 150 sq. ft. (9.29 to 13.94 sq. m) with brush or roller application.
4. Coat side and end grains with three or more consecutive coats to give full protection.
5. Two coats must be given to any wood that will be exposed to severe conditions of decay, staining fungi or water (see fungi listing below). *Apply second coat before first coat is dry.*
6. Any surface cut after first treatment should be retreated. By following these application directions effective control can be obtained against wood destroying decay fungi (like brown or white rot), staining fungi (like blue stain), surface mold (like black, brown or other colored mildew) and dimensional change.

#### Drying Time and Clean-Up

Allow 24 to 48 hours of air drying time before applying finish. Before glazing, painting or varnishing, the treatment should be completely dry and odor free. Use Weldwood® Cleaner and Thinner or mineral spirits to remove wet Wood Protector™ from all surfaces, brushes and rollers. Lacquer thinner may be used to remove dried product from surfaces.

EPA REG. NO.  
1409-31  
EPA EST. NO.  
1409-Mi-1

Stock No. 0909

### PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS (AND DOMESTIC ANIMALS)

## WARNING!

KEEP OUT OF REACH OF CHILDREN. HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN. CAUSES EYE AND SKIN IRRITATION.

AVOID REPEATED SKIN CONTACT. WEAR RUBBER GLOVES AND PROTECTIVE CLOTHING WHEN APPLYING OR HANDLING FRESHLY TREATED LUMBER.

Wood Protector™ contains Petroleum Spirits and Tributyltin Oxide. Keep contents and freshly treated articles away from flame, food and living plants. Do not use, pour, spill or store near heat or open flame. Use only in well ventilated area. Do not breathe vapor or spray mist. Do not get in eyes, or on skin or clothing.

**FIRST AID:** If on skin, wash immediately with soap and water. Remove and wash contaminated clothing before reuse. If in eyes, immediately flood with water for at least 15 minutes. Call a physician. If swallowed, give 1 or 2 glasses of water and induce vomiting by touching back of throat with finger or blunt object. Do not induce vomiting or give anything by mouth to an unconscious person. Call a physician.

#### ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste. Do not apply directly to water.

#### STORAGE AND DISPOSAL

Do not use or store inside the home. Do not reuse empty container. Wrap container and put in trash collection.

#### PRODUCT USAGE

Apply this product only as specified on this label. It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**IMPORTANT NOTICE TO PURCHASER:** Buyer assumes all risk, handling and storage of product not in strict accordance with label directions. No express warranties are given. Should defect occur, Seller's sole liability is to replace product or refund purchase price.

ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR USE IS LIMITED TO ONE YEAR FROM DATE OF PURCHASE. LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE OR LOSS IS SPECIFICALLY EXCLUDED AT ALL TIMES.  If used for other than personal, family or household purposes, any implied warranty of MERCHANTABILITY or FITNESS FOR PARTICULAR USE is excluded. Roberts Consolidated Industries

Manufactured by  
**Roberts Consolidated Industries**  
CITY OF INDUSTRY, CA 91749  
MADE AND PRINTED IN U.S.A.

LH914-1184