


Weldwood[®] WOODLIFE[®]

(WATER BASED)

WATER REPELLENT PRESERVATIVE FOR WOOD
(PATENT PENDING)

CONCENTRATE - CLEAR

**BEFORE USING DILUTE BY ADDING
4 PARTS OF WATER TO
1 PART CONCENTRATE**

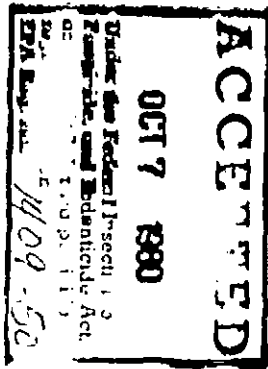

CAUTION!

**KEEP OUT OF REACH OF CHILDREN
HARMFUL IF SWALLOWED OR
ABSORBED THROUGH SKIN.
AVOID CONTACT WITH EYES OR SKIN.**

Keep contents and freshly treated articles away from food and living plants. Use only in well ventilated area. Do not breathe vapor or spray mist. Do not get in eyes or on skin or clothing. Wear goggles, rubber gloves and protective clothing when applying or handling freshly treated lumber.

STORAGE AND DISPOSAL

Not for use or storage in and around the home. Do not contaminate water, food or feed by storage or disposal of waste. Leftover pesticide or rinsate should be disposed of in an approved landfill or buried in a safe place away from water supplies. Reseal container and return to drum conditioner or dispose of in an approved landfill or bury in a safe place. Consult Federal, State or Local authorities for alternate disposal procedures.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds.

EPA REG. NO. 1409-50
EPA Est. No. 1409-CA-1
EPA Est. No. 1409-GA-1
EPA Est. No. 1409-MI-1
EPA Est. No. 1409-PA-1
EPA Est. No. 1409-TX-1
EPA Est. No. 1409-WA-1

Manufactured by



Roberts Consolidated Industries
City of Industry, CA 91749

FOR INDUSTRIAL USE ONLY

FIRST AID:

IF SWALLOWED call a physician immediately.
IF ON SKIN wash with soap and water.
IF IN EYES flood with water for 15 minutes.
NOTE TO PHYSICIAN: This product is a cholinesterase inhibitor. If signs of cholinesterase inhibition appear atropine only by injection is antidotal.

ACTIVE INGREDIENTS

3-iodo-2-propynyl butyl carbamate	2.4%
INERT INGREDIENTS	97.6%
TOTAL	100.0%

IMPORTANT NOTICE TO PURCHASER

Buyer assumes all risk of use, handling and storage of product not in strict accordance with label directions. No express warranties are given. Should defect occur, Seller's sole liability is to replace product or refund purchase price. ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR USE IS LIMITED TO ONE YEAR FROM DATE OF PURCHASE. LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE OR LOSS IS SPECIFICALLY EXCLUDED AT ALL TIMES. If used for other than personal, family or household purposes, any implied warranty of MERCHANTABILITY or FITNESS FOR PARTICULAR USE is excluded.
© Roberts Consolidated Industries 1976

Stock No. 0949
Stock No. 0950
Net 5 U.S. Gallons (18.9 liters)
Net 55 U.S. Gallons (208.2 liters)
Made and Printed in U.S.A.

DIRECTIONS:

Apply this product in a manner inconsistent with the label. It is a violation of FIFRA if applied in a manner inconsistent with the label.

DESCRIPTION: A clear, penetrating, preservative for wood (like brown or white stain), surface mold (colored mildew) and wood, hardboard, fences and outdoor wood which will not eat food. DO NOT USE IN CONTINUOUS CONTACT WITH FOOD. LESS THE WOOD VARNISH OR SHEET. Keep container closed.

PRODUCT USES: wood, hardboard, fences and outdoor wood which will not eat food. DO NOT USE IN CONTINUOUS CONTACT WITH FOOD. LESS THE WOOD VARNISH OR SHEET. Keep container closed.

RETENTION: 3-min per MBF. 30-min per MBF. Brush application varies by species and finish.

PREPARATION: Make as desired before previously finished or off old finish. Do not clean and dry.

APPLICATION: Treating air must immersion, roller or surface cut after treated.

IMMERSION: Millwork - 3 minutes. Treatme Industrial Standard above ground exposure.

FINISHING: Before treatment should be allowed 4-8 hours in humidity conditions production. Use a using lacquers.

CLEAN-UP: Use water immersion tanks, spray area. Mineral spirits Thinner may be required (Water Based).

BEST DOCUMENT AVAILABLE

Weldwood®
WOODLIFE®
(WATER BASED)

WATER REPELLENT PRESERVATIVE FOR WOOD
(PATENT PENDING)

CONCENTRATE - CLEAR
BEFORE USING DILUTE BY ADDING
4 PARTS OF WATER TO
1 PART CONCENTRATE

CAUTION!

KEEP OUT OF REACH OF CHILDREN
HAZARDOUS IF SWALLOWED OR
ABSORBED THROUGH SKIN.
AVOID CONTACT WITH EYES OR SKIN.

Keep contents and freshly treated articles away from food and living plants only in well ventilated area. Do not breathe vapor or spray mist. Do not get in eyes or on skin or clothing. Wear goggles, rubber gloves and protective clothing when applying or handling freshly treated lumber.

USAGE AND DISPOSAL

For use or storage in and around the home. Do not contaminate water or food by storage or disposal of waste. Leftover pesticide or rinsate should be disposed of in an approved landfill or buried in a safe place away from water supplies. Reseal container and return to drum conditioner or use of in an approved landfill or bury in a safe place. Consult Federal or Local authorities for alternate disposal procedures.

ENVIRONMENTAL HAZARDS

Product is toxic to fish and wildlife. Keep out of lakes, streams or ponds.

- PA REG. NO. 1409-50
- PA Est. No. 1409-CA-1
- PA Est. No. 1409-GA-1
- PA Est. No. 1409-MI-1
- PA Est. No. 1409-PA-1
- PA Est. No. 1409-TX-1
- PA Est. No. 1408-WA-1

Manufactured by



Roberts Consolidated Industries
 City of Industry, CA 91749

FOR INDUSTRIAL USE ONLY

- Stock No. 0949
- Stock No. 0950
- Net 5 U.S. Gallons (18.9 liters)
- Net 55 U.S. Gallons (208.2 liters)

Made and Printed in U.S.A.

FIRST AID:

IF SWALLOWED call a physician immediately
 IF ON SKIN wash with soap and water
 IF IN EYES flood with water for 15 minutes
 NOTE TO PHYSICIAN This product is a cholinesterase inhibitor. If signs of cholinesterase inhibition appear, atropine only by injection is antidotal.

ACTIVE INGREDIENTS	
3-IODO-2-PROPENYL BUTYL CARBAMATE	2.4%
INERT INGREDIENTS	97.6%
TOTAL	100.0%

IMPORTANT NOTICE TO PURCHASER

Buyer assumes all risk of use, handling and storage of product not in strict accordance with label directions. No express warranties are given. Should defect occur, Seller's sole liability is to replace product or refund purchase price. ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR USE IS LIMITED TO ONE YEAR FROM DATE OF PURCHASE. LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE OR LOSS IS SPECIFICALLY EXCLUDED AT ALL TIMES. If used for other than personal, family or household purposes, any implied warranty of MERCHANTABILITY or FITNESS FOR PARTICULAR USE is excluded.

© Roberts Consolidated Industries 1976

DIRECTIONS (After Dilution)

Apply this product only as specified on this label. It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

DESCRIPTION: WOODLIFE (Water Based) is a clean, penetrating, paintable, water repellent preservative for wood. It protects against decay fungi (like brown or white rot), staining fungi (like blue stain), surface mold (like a black, brown or other colored mildew) and dimensional change.

PRODUCT USES: Millwork, shingles, siding, plywood, hardboard, flakeboard, structural lumber, fences and outdoor furniture. DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD. DO NOT USE ON WOOD WHICH WILL COME IN CONTINUOUS CONTACT WITH THE SKIN UNLESS THE WOOD IS SEALED WITH PAINT, VARNISH OR SHELLAC AFTER TREATMENT. Keep container closed when not in use.

RETENTION: 3-minute immersion—5-10 gallons per MBF. 30-minute immersion—10-15 gallons per MBF. Brush application—150 sq. ft. per gallon but varies by species and condition of the substrate.

PREPARATION: Machine, cut, glue and sand wood as desired before treating. Do not use over previously finished or stained wood without stripping off old finish. Do not use steel wool. Wood must be clean and dry.

APPLICATION: Treating solution, wood and surrounding air must be above 40°F (4.4°C). Apply by immersion, roller coater, flood spray or brush. Any surface cut after first treatment should be re-treated.

IMMERSION: Millwork or other items to be painted—3 minutes. Treatment should be in accordance with Industrial Standard IS-4. Use only on items for above ground exposure.

FINISHING: Before glazing, painting or varnishing, treatment should be completely dry and odor-free. Allow 4-8 hours under average temperature and humidity conditions. Can be heat-dried for plant production. Use a sealer such as shellac before using lacquers.

CLEAN-UP: Use water and detergent to clean immersion tanks, spray equipment and surrounding area. Mineral spirits or Weldwood Cleaner & Thinner maybe required to remove dried Woodlife (Water Based).

BEST DOCUMENT AVAILABLE