

PH 21
1409-50
pg. 1 of 3

Weldwood®

WOODLIFE®

D

WATER REPELLENT PRESERVATIVE FOR WOOD

CONCENTRATE - CLEAR

Before Using, Dilute by Adding
4 Parts of Mineral Spirits
to
1 Part Concentrate

ACCEPTED
APR 24 1985
Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under
EPA Reg. No. 1409-50

ACTIVE INGREDIENTS:
3-IODO-2-PROPYNYL BUTYL CARBAMATE 2.4%
INERT INGREDIENTS 97.6%
TOTAL 100.0%

**KEEP OUT OF REACH OF CHILDREN.
WARNING**

FIRST AID:

IF SWALLOWED call a physician immediately.
IF ON SKIN wash with soap and water.
IF IN EYES flood with water for 15 minutes.
NOTE TO PHYSICIAN: This product is a cholinesterase inhibitor. If
signs of cholinesterase inhibition appear, atropine only by injection
is antidotal.

See Side Panel for Additional Precautionary Statements

IMPORTANT NOTICE TO PURCHASER

Buyer assumes all risk of use, handling and storage of product not in strict accordance with label directions. No express warranties are given. Should defect occur, Seller's sole liability is to replace product or refund purchase price. ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR USE IS LIMITED TO ONE YEAR FROM DATE OF PURCHASE. LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE OR LOSS IS SPECIFICALLY EXCLUDED AT ALL TIMES. If used for other than personal, family or household purposes, any implied warranty of MERCHANTABILITY or FITNESS FOR PARTICULAR USE is excluded.

Roberts Consolidated Industries

- LM
- EPA REG. No. 1409-50
- EPA Est. No. 1408-CA-1
- EPA Est. No. 1408-GA-1
- EPA Est. No. 1408-MI-1
- EPA Est. No. 1408-PA-1
- EPA Est. No. 1408-TX-1
- EPA Est. No. 1408-WA-1

Manufactured by

 **Roberts Consolidated Industries**
City of Industry, CA 91749

FOR INDUSTRIAL USE ONLY

- Stock No.
 - Stock No. →
 - Net 5 U.S. Gallons (18.9 liters)
 - Net 90 U.S. Gallons (305.2 liters)
- Made and Printed in U.S.A.

Side Panel

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING

(18 pt)

Contains Mineral Spirits

Harmful or fatal if swallowed or absorbed through the skin. Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield when handling. Avoid breathing vapors or mist.

Note to Physician: This product is a cholinesterase inhibitor. If signs of cholinesterase inhibition appear, atropine only by injection is antidotal.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL AND CHEMICAL HAZARDS


Contains Petroleum Spirits. Keep contents and freshly treated articles away from flame, food and living plants. Do not use, pour, spill or store near heat or open flame. Use only in well ventilated area.

STORAGE AND DISPOSAL

(12 pt)

Do not contaminate water, food, or feed by storage and disposal. Wastes resulting from this product may be disposed of on site or at an approved waste facility.

Container Disposal: Triple rinse (or equivalent), then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

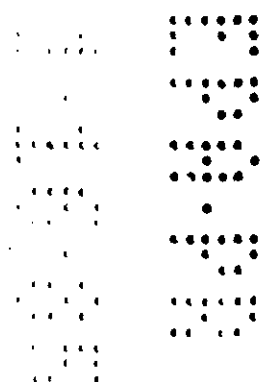

Side Panel

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Description: WOODLIFE is a clean, penetrating paintable, water repellent preservative for wood. It protects against decay fungi (like brown or white rot), staining fungi (like blue stain), surface mold (like a black, brown or other colored mildew) and dimensional change.

Product Uses: Millwork, shingles, siding, plywood, hard-board, flakeboard, structural lumber, fences and outdoor furniture. DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD. DO NOT USE ON WOOD WHICH WILL COME IN CONTINUOUS CONTACT WITH THE SKIN UNLESS THE WOOD IS SEALED WITH PAINT, VARNISH OR SHELLAC AFTER TREATMENT. Keep container closed when not in use.

Retention: 3 minute immersion -- 5-10 gallons per MBF, 30 minute immersion--10-15 gallons per MBF. Brush application--150 sq. ft. per gallon but varies by species and condition of the substrate.

Preparation: Machine, cut, glue and sand wood as desired before treating. Do not use over previously finished or stained wood without stripping off old finish. Do not use steel wool. Wood must be clean and dry.

Application: Treating solution, wood and surrounding air must be above 40° F (4.4° C). Apply by immersion, roller coater, flood spray or brush. Any surface cut after first treatment should be retreated.

Immersion: Millwork or other items to be painted-3 minutes. Treatment should be in accordance with Industrial Standard IS-4. Use only on items for above ground exposure.

Finishing: Before glazing, painting or varnishing, treatment should be completely dry and odor-free. Allow 24 to 48 hours under average temperature and humidity conditions. Can be heat-dried for plant production. Use a sealer such as shellac before using lacquers.

Clean-Up: Use Mineral Spirits to clean immersion tanks, spray equipment and surrounding area. Mineral spirits or Weldwood Cleaner & Thinner may be required to remove dried Woodlife.