




<p>OUTSTANDING FEATURES</p> <ul style="list-style-type: none"> • Water repellent - reduces swelling and shrinking • Protects against mildew, decay, rot and stain • (contains no solvents) odorless, colorless when dry • Easy water clean up • Dries in 4-8 hours • Can be painted, stained or finished • Will not crack, peel or blister • Finishes cover easier - last longer
<p>PREPARATION</p> <p>All cutting, gluing and sanding should be done before applying WOODLIFE (Water Based). Wood must be clean, dry and free from foreign material. Do not use over previously finished or stained wood without stripping off the old finish. Do not use steel wool.</p>
<p>DIRECTIONS FOR USE</p> <p>Apply this product only as specified on the label. It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Keep container closed when not in use.</p>
<p>APPLICATION</p> <ol style="list-style-type: none"> 1. Temperature of lumber and WOODLIFE (Water Based) should be 40 F (4.4C) or above. 2. Treating may be done by roller coating, brushing to refusal or flood spraying. 3. Flood wood with solution until puddles remain on the surface. 4. Coat side and end grain with 3 or more consecutive coats to give full protection. 5. Any surface cut after first treatment should be retreated. <p>By following these application directions effective control can be obtained against decay fungi (like brown or white rot), staining fungi (like blue stain), surface mold (like a black brown or other colored mildew) and dimensional change.</p>
<p>COVERAGE</p> <p>150 sq. ft. (14 sq. m) per gallon with brush or roller application.</p>
<p>DRYING TIME</p> <p>A minimum of 4-8 hours air drying time is required before finishing, depending on conditions and method of application. On humid days, longer drying time may be required.</p>
<p>THINNING</p> <p>No thinning is required.</p>
<p>CLEAN UP</p> <p>Use water to remove wet WOODLIFE (Water Based) from all surfaces, brushes and rollers. Mineral spirits or WELDWOOD CLEANER & THINNER may be required to remove dried product from glass and other areas.</p>

Weldwood

WOOD

WATER

WATER REPELLENT -
Clear • Paintable

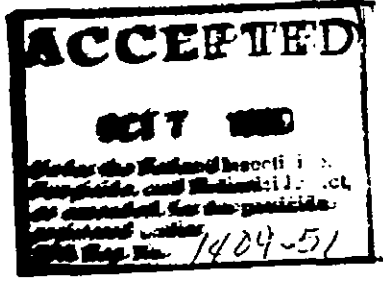

USES: A water repellent preservative for plywood, board, flake board, dimensional lumber, trim, siding, and other wood items and siding. Used where a water repellent, preservative, and mold inhibition are required. Above ground application.

Active Ingredients:
 3-Iodo-2-Propynyl Butyl Carbamate 5%
 Inert Ingredients 99.5%
 Total 100.0%

Net Cont. 1 U.S. gallon (3.78 liters)
Net Cont. 32 fl. oz. (1 U.S. quart) (946 ml)
Net Cont. 5 U.S. gallons (18.9 liters)

KEEP OUT OF REACH OF CHILDREN
CAUTION
STATEMENT OF PRACTICE
 IF SWALLOWED call a physician immediately.
 IF ON SKIN wash with soap and water.
 IF IN EYES flood with water for 15 minutes.
NOTE TO PHYSICIAN: This product is a cholinesterase inhibitor. If signs of cholinesterase inhibition by injection is antidotal.
 SEE SIDE PANEL FOR ADDITIONAL INFORMATION.

Weldwood[®]

TM

Weldlife[®]

ACRYLATE BASED (Patent Pending)

WOOD PRESERVATIVE
Paintable • Stainable

Excellent preservative for plywood, hard dimensional lumber, manufactured wood used where a degree of dimensional stability, durability and paintability are required for exterior applications.

STOCK NO. 0946

EPA Reg. No. 1409-51
EPA Est. No. 1409-Mi-1

KEEP OUT OF REACH OF CHILDREN
CAUTION

INSTRUCTIONS FOR PRACTICAL TREATMENT

1. Call a physician immediately
2. Wash with soap and water.
3. Rinse with water for 15 minutes.

NOTE: This product is a cholinesterase inhibitor. If cholinesterase inhibition appears, atropine only is the antidote.

SEE LABEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

114

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

CAUTION

HARMFUL IF SWALLOWED
OR ABSORBED THROUGH SKIN

AVOID CONTACT WITH EYES OR SKIN

Keep contents and freshly treated articles away from food and living plants. Use only in well ventilated area. Do not breathe vapor or spray mist. Do not get in eyes, or on skin or clothing. Wear goggles, rubber gloves and protective clothing when applying or handling treated lumber.

DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD.
DO NOT USE ON WOOD WHICH WILL COME IN CONTINUOUS CONTACT WITH THE SKIN UNLESS THE WOOD IS SEALED WITH PAINT, VARNISH OR SHELLAC AFTER TREATMENT.

If a clear natural finish is desired, for best results allow the treated wood to weather 3-6 months then apply WELDWOOD CLEAR PAR.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste.

STORAGE AND DISPOSAL

Do not use or store inside the home. Do not reuse empty container. Wrap container and put in trash collection.

IMPORTANT NOTICE TO PURCHASER: Buyer assumes all risk of use, handling and storage of product not in strict accordance with label directions. No express warranties are given. Should defect occur, Seller's sole liability is to replace product or refund purchase price. ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR USE IS LIMITED TO ONE YEAR FROM DATE OF PURCHASE. LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE OR LOSS IS SPECIFICALLY EXCLUDED AT ALL TIMES. If used for other than personal, family or household purposes, any implied warranty of MERCHANTABILITY or FITNESS FOR PARTICULAR USE is excluded. © Roberts Consolidated Industries 1976.

Manufactured by



Roberts Consolidated Industries

CITY OF INDUSTRY, CA. 91749

MADE AND PRINTED IN U.S.A.

115

BEST DOCUMENT AVAILABLE