

FRONT PANEL

WELDWOOD

GUARANTEED FOR LIFE

See Lid

WOODLIFE A


WOOD PRESERVATIVE

A WATER REPELLENT PRESERVATIVE TREATMENT

FOR EXTERIOR WOOD

Protects Against Mildew  
Decay, Rot and Fungal Stain

Can Be Painted,  
Stained or Finished

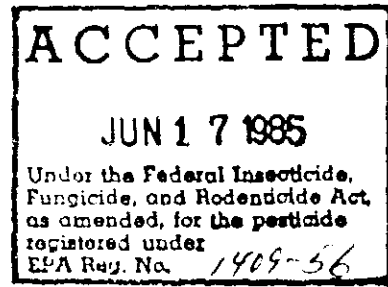

- USES:
- SIDING
  - FENCES
  - DECKS
  - EXTERIOR
  - WOOD
  - PRODUCTS

KEEP OUT OF REACH OF CHILDREN (12 pt)  
 WARNING (18 pt)  
 KEEP AWAY FROM HEAT OR OPEN FLAME  
 HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN

See Side Panel for Additional Precautionary Statements

EPA Reg. No. 1409-  
EPA Est. No. 1409-MI-1

Active Ingredients:	
Methylene bis(thiocyanate) ..	20%
2-(thiocyanomethylthio) ..	20%
benzothiazole ..	20%
Inert Ingredients: ..	99.60%
Total ..	100.00%

Net Contents - 1 U.S. Gallon  
(3.78 Liters)

287

PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS (AND DOMESTIC ANIMALS)

WARNING!

KEEP OUT OF REACH OF CHILDREN.  
HARMFUL IF SWALLOWED OR ABSORBED  
THROUGH SKIN.

Warning: Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful if swallowed or absorbed through skin. Avoid breathing vapors or mist. This product may cause skin sensitization.

Statement of Practical Treatment: In case of skin contact, wash promptly and thoroughly with soap and water. If product gets in eyes, flush immediately with copious amounts of clean, cool water for 15 to 20 minutes. Get medical attention immediately. If product is swallowed, call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person.

Note to Physician: Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression, and convulsion may be needed.

Environmental Hazards

This pesticide is toxic to fish. Do not apply directly to water. Permits may be required for discharges containing this pesticide into lakes, streams, ponds, or public water. For guidance, contact the regional office of the Environmental Protection Agency. This pesticide is toxic to fish. Do not apply directly to water. Permits may be required for discharges containing this pesticide into lakes, streams, ponds, or public water. For guidance, contact the regional office of the Environmental Protection Agency. If, when applying to house siding, roof shingles, or decks, any foundation or ornamental plantings should be protected to prevent injury.

Physical and Chemical Hazards

Do not use or store near heat or open flame.

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Storage and Disposal

Storage: Keep container closed when not in use. Store in cool place. Leaking or damaged containers should be placed in a plastic bag and discarded in trash. All pesticides should be kept out of reach of children and stored away from food.

Disposal: Securely wrap original container in several layers of newspaper and discard in trash. Do not reuse container. Rinse thoroughly before discarding in trash.

IMPORTANT NOTICE TO PURCHASER -


Seller's sole liability is to replace product or refund purchase price  ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR USE IS LIMITED TO ONE YEAR FROM DATE OF PURCHASE. LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE OR LOSS IS SPECIFICALLY EXCLUDED AT ALL TIME  If used for other than personal, family or household purposes, any implied warranty of Merchantability or FITNESS FOR PARTICULAR USE is excluded.

MANUFACTURED BY

ROBERTS CONSOLIDATED INDUSTRIES

CITY OF INDUSTRY, CA 91749

Printed in U S A

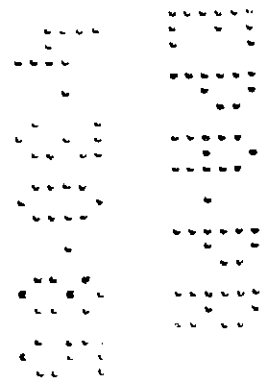

## Uses

WOODLIFE is a clean, penetrating, paintable, water repellent and preservative for use on exterior wood to be used above ground. It will protect and lengthen the life of millwork, shingles, siding, windows, doors, structural lumber, fences and outdoor furniture. WOODLIFE also acts as an excellent base for paint, varnish, enamel and solid coat stains and increases their resistance to blistering, and peeling. Use a sealer such as shellac after treatment before using lacquers. WOODLIFE is an excellent protector of wood when a clear exterior natural finish is desired.

With adequate retention, Woodlife<sup>R</sup> Wood Preservative will protect wood against termites.

Keep solution and freshly treated wood away from plastics, asphalt shingles and tiles. DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD. DO NOT USE ON INTERIOR WOOD. DO NOT USE ON WOODEN PLANT CONTAINERS, GREENHOUSES OR COLDFRAMES.

## OUTSTANDING FEATURES:

Water repellent . . . Reduces swelling and shrinking

Protects against fungal decay, warping, and mildew stain

Ready-to-use

Adds years of life to wood

Colorless . . . odorless when dry

When used as a base coat, finishes last longer

## DIRECTIONS FOR USE

Apply this product only as specified on this label. It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

## PREPARATION

All cutting, glueing and sanding should be done before applying WOODLIFE. Wood must be clean and dry. Do not use over previously finished or stained wood without stripping off the old finish. Do not use steel wool.

## APPLICATION

1. Temperature of lumber and WOODLIFE must be above 40°F (4.4°C)
2. Treating may be done with brush or roller. Do not spray.
3. Flood wood with WOODLIFE until puddles remain on surface.
4. Coat side and end grains with three or more consecutive coats to give full protection.
5. Two coats must be given to any wood that will be exposed to severe conditions of fungal decay, staining, mildew or water (see fungal listing below.) Apply second coat before first coat is dry.

APPLICATION - CONTINUED

6. Any surface cut after first treatment should be retreated.

By following these application directions effective control can be obtained against wood destroying decay fungi (like brown or white rot) staining fungi (like blue stain), surface mold (like black, brown or other colored mildew) and dimensional change.

COVERAGE

100 to 150 sq. ft (9.29 to 13.94 sq. m) per gallon with brush or roller application.

DRYING TIME

Allow 24 to 48 hours of air drying time before applying finish. Before glazing, painting, or varnishing, the treatment should be completely dry and odor free.

THINNING

No thinning required.

CLEANUP

Use Weldwood<sup>®</sup> Cleaner and Thinner on nonflammable solvent to remove wet Woodlife<sup>®</sup> Wood Preservative from all surfaces, brushes and rollers. Lacquer Thinner may be used to remove dried product from glass and other surfaces.

IMPORTANT NOTICE TO PURCHASER: Buyer assumes all risk of use, handling and storage of product not in strict accordance with label directions. No express warranties are given should defect occur.

RIGHT BACK PANEL (INDUSTRIAL)

Use:

WOODLIFE is a clean, penetrating, paintable, water repellent and preservative for use on exterior wood to be used above ground. It will protect and lengthen the life of millwork, shingles, siding, windows, doors, structural lumber, fences and outdoor furniture. WOODLIFE also acts as an excellent base for paint, varnish, enamel and solid coat stains and increases their resistance to blistering and peeling. Use a sealer such as shellac after treatment before using lacquers. WOODLIFE is an excellent protector of wood when a clear exterior natural finish is desired.

With adequate retention, Woodlife<sup>R</sup> Wood Preservative will protect wood against termites and wood destroying insects.

Keep solution and freshly treated wood away from plastics, asphalt shingles and tiles. DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD. DO NOT USE ON INTERIOR WOOD.

OUTSTANDING FEATURES:

Water repellent . . . Reduces swelling and shrinking

Protects against decay, warping and fungi stain

Ready-to-Use

Adds Years of Life to Wood

Colorless . . . Odorless when dry

When used as a base coat, finishes last longer

DIRECTIONS FOR USE

Apply this product only as specified on this label. It is a violation of Federal law to use this product in a manner inconsistent with its labelling.

PREPARATION

All cutting, gluing and sanding should be done before applying WOODLIFE. Wood must be clean and dry. Do not use over previously finished or stained wood without stripping off the old finish. Do not use steel wool.

### APPLICATION

1. Temperature of lumber and WOODLIFE must be above 40°F (4.4°C).
2. Apply by immersion, Dri Vac vacuum, roller coater, flood spray or brush. Do not spray.
3. Flood wood with WOODLIFE until puddles remain on surface.
4. Coat side and end grains with three or more consecutive coats to give full protection.
5. Two coats must be given to any wood that will be exposed to severe conditions of decay, staining, fungi or water (see fungi listing below). Apply second coat before first coat is dry.
6. Any surface cut after first treatment should be retreated.

By following these application directions effective control can be obtained against wood destroying decay fungi (like brown or white rot) staining fungi (like blue stain), surface mold (like black, brown or other colored mildew) and dimensional change.

### RETENTION

3 minute immersion - 5-10 gallons per MBM. 30 minute immersion - 10-15 gallons per MBM. 24 hour immersion - 15-25 gallons per MBM. Brush application - 150 sq. ft. per gallon; but varies by specie and condition of wood.

### INDUSTRIAL IMMERSION APPLICATION

Millwork or other items to be painted - 3 minutes for batch or bundle treating, 30 seconds for plywood, 15 seconds for treating individual parts. Treatment should be in accordance with Industrial Standard 4.

### DRYING TIME.

Allow 24 - 48 hours of air drying time before applying finish. Before glazing, paint, or varnishing, the treatment should be completely dry and odor free.

### THINNING

No thinning required.

### CLEANUP

Use Weldwood<sup>R</sup> Cleaner and Thinner or nonflammable solvent to remove wet Woodlife<sup>R</sup> Wood Preservative from all surfaces, brushes and rollers. Lacquer Thinner may be used to remove dried product from glass and other surfaces.