

PM 22

1409-58

Page 1 of 6

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

MAY 15 1991

E. David Lewis
Pazianos Associates
1338 G Street, S.E.
Washington, D.C. 20003

Dear Mr. Lewis:

Subject: Stamped accepted split label
Woodlife B Clear Wood Preservative
EPA Reg No 1409-58
Your letter dated May 8, 1991

The labeling referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. A stamped copy is enclosed for your records.

Sincerely yours,

CS

Cynthia Giles-Parker
Product Manager (22)
Fungicide-Herbicide Branch
Registration Division (H7505C)

Enclosure

| CONCURRENCES | | | | | | | |
|--------------|-----------------|--|--|--|--|--|--|
| SYMBOL | H7505C | | | | | | |
| SURNAME | D. K. [unclear] | | | | | | |
| DATE | 5-15-91 | | | | | | |

276

FRONT LABEL COPY

DAPTTM

PREMIUM WOODLIFETM VOCTTM

Premium Wood Preservative

With Water Repellent

5-Way Protection in One Coat*

*See application directions.

- o Termite protection
- o U.V. protection
- o Mildew protection
- o Deep penetrating protection
- o Water-repellent surface protection

Clear

KEEP OUT OF REACH OF CHILDREN

WARNING!

COMBUSTIBLE LIQUID AND VAPOR.

Harmful or fatal if swallowed or absorbed through skin.

Causes eye and skin irritation.

Read precautionary and first aid statements on side panels carefully before use.

ONE U. S. GALLON (3.78 LITERS)

Active Ingredients:

Methylene bis(thiocyanate).....0.20%

2-(thiocyanomethylthio)

benzothiazole.....0.20%

O-O diethyl O-(3,5,6, trichloro-

2-pyridyl) phosphorothioate.....0.10%

Inert Ingredients..... 99.50%

Total.....100.00%

Contains Petroleum Distillates


EPA Reg. No. 1409-58

EPA Est. No. 1409-OH-1

Typical Applications

Shingles/Siding

Fencing

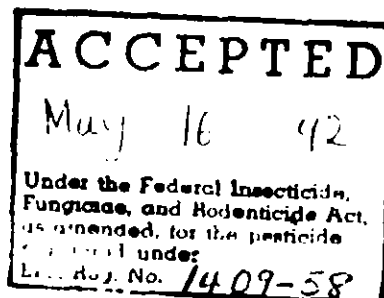

WOODLIFE®

Premium Wood Preservative
With Water Repellent

PRECAUTIONARY STATEMENTS**WARNING!**

HAZARDS TO HUMANS AND DOMESTIC ANIMALS
HARMFUL OR FATAL IF SWALLOWED OR ABSORBED
THROUGH SKIN. CAUSES EYE AND SKIN
IRRITATION

Use only in a well ventilated area. Do not breath vapor. Do not get in eyes, or on skin or clothing. Wear tightly woven coveralls and use gloves impervious to the chemicals (for example, gloves that are vinyl coated or rubber) when applying or handling freshly treated lumber. When sawing and machining, wear dust mask. Avoid frequent or prolonged inhalation of sawdust from treated wood. Wash thoroughly with soap and water after skin contact, especially before eating, drinking, or use of tobacco products. Remove contaminated clothing and wash thoroughly before reuse. Treated wood should not be burned in open fires, fireplaces or wood stoves.

PHYSICAL AND CHEMICAL HAZARDS

Combustible liquid and vapor. Do not use or store near heat or open flame.

ENVIRONMENTAL HAZARDS

This product is toxic to fish, birds, wildlife and plantlife. This product is highly toxic to bees exposed to direct treatment or residue on plants. Do not apply directly to water. Do not contaminate water when disposing of equipment washwaters.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. If irritation develops, get medical attention.

IF IN EYES: Flush eyes with plenty of water. Get medical attention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention.

IF SWALLOWED: Do not induce vomiting. Contact physician or Regional Poison Control Center immediately.

NOTE TO PHYSICIAN: This product is a cholinesterase inhibitor. If signs of cholinesterase inhibition appear, atropine only by injection is antidotal.

LOW VOC/VOS Formula

Volatile Organic Compounds (VOC) do not exceed 350 grams per liter, less water and less exempt solvent.

This product contains a maximum of 2.92 pounds of VOS per gallon of coating.

PRODUCT INFORMATION**OUTSTANDING FEATURES:**

- o Protects wood from decay, mildew, fungal stain and warping
- o Water repellent...reduces swelling, shrinking and cracking
- o Protects wood from termites and wood destroying insects
- o Ready to Use
- o Adds years of life to wood
- o Colorless, odorless when dry
- o Inhibits U.V. (ultra-violet) light to slow damaging effects of sun

USES

Premium Woodlife[®] VOC[™] Wood Preservative is a clear, penetrating, water repellent and preservative for use on above ground exterior wood. Ideal for new wood or unfinished weathered wood. Protects and lengthens the life of millwork, wood shingles, siding, windows, doors, structural lumber and fences. Provides excellent protection to wood when a clear, exterior natural finish is desired.

Note: This product will not prevent natural graying of wood. With adequate retention, Premium Woodlife[®] VOC[™] will protect wood against termites and wood destroying insects.

COVERAGE

100 to 150 sq. ft. per gallon with brush or roller applications.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Apply this product only as specified on this label.

Keep contents and freshly treated articles away from flame, food and living plants. Exposure to vapors can be harmful to plant life. All plants up to 30 feet away should be covered with a tarp or plastic sheet until application is completed. Keep solution and freshly treated wood away from plastics, asphalt shingles and tiles. Do not use on wood which will come in contact with food. This product must be applied out of doors to wood intended only for exterior use.

Note: Keep container closed when not in use!

PREPARATION

1. For best results, all cutting, gluing and sanding should be completed before applying Premium Woodlife[®] VOC[™]. Wood must be clean and dry. Stains and paints should be stripped for best results. Do not use steel wool.
2. If mildew is present, remove by washing with Woodlife[®] Deck Cleaner & Brightener or a 50% dilution of household bleach and water. Rinse with water. If extractive bleeding has occurred, scrub with a diluted solution of oxalic acid (1/4 lb. per gallon of water) and then wash at once with clear water. Note: Read cautions on Bleach and Oxalic Acid labels before using.
3. Allow surface to dry before applying Premium Woodlife[®] VOC[™].

APPLICATION

1. Minimum application temperature of 40°F (4.4°C)
 2. Apply product with brush or roller. When roller coating, use a brush to finish edges and grooves. Do not spray.
 3. Only one coat is necessary in most applications.
 4. Two coats must be given to any wood that will be exposed to severe conditions of decay, staining, fungi or water (see Fungi listing below). Apply second coat while first coat is wet.
 5. Fully saturate side and end grains to give maximum protection.
 6. Do not puddle or build to wet film.
 7. Not recommended for use on previously painted or stained wood.
 8. Oil base paint or stain may be applied to Premium Woodlife VOC after at least 30 days. Latex based coatings are not recommended for use over Premium Woodlife VOC.
- By following these application directions, effective control can be obtained against wood destroying decay fungi (like brown or white rot), staining fungi (like blue stain), surface mold (like black, brown or other colored mildew) and dimensional change.

DRYING TIME

Allow 24 to 48 hours drying time before using treated surface. Wait a minimum of 30 days before painting over Premium Woodlife VOC with an oil based coating. Latex coatings are not recommended for use over Premium Woodlife VOC.

THINNING

Ready-to-use. No thinning required.

CLEAN UP

Use DAP[®] Cleaner & Thinner or nonflammable solvent to remove wet Premium Woodlife[®] VOC[™] from all surfaces, brushes and rollers. Lacquer thinner may be used to remove dried product from glass and other surfaces.

STORAGE AND DISPOSAL

STORAGE: Store in original container in locked storage area. Do not store near heat or open flame. Keep contents away from food and feed.

HOUSEHOLD: Do not reuse empty container. Securely wrap empty container in several layers of newspaper and discard in trash.

COMMERCIAL

PESTICIDE DISPOSAL: Wastes resulting from use of this pesticide may be disposed of on site or at an approved waste disposal facility. Do not contaminate water, food, or feed by storage or disposal.

CONTAINER DISPOSAL: Triple rise (or equivalent). Then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

LIMITED WARRANTY

Buyer assumes all risks of use, handling and storage of product not in strict accordance with label directions. Any implied warranty of MERCHANTABILITY OR FITNESS FOR PARTICULAR USE is excluded. Liability for any incidental or consequential damage or loss is specifically excluded at all times. Seller will not accept liability for more than product replacement. Some states do not allow limitations on how long implied warranties last nor exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

DAP

For the jobs you
only want to do once.™

1991 DAP Inc. Dayton, OH 45401
A Subsidiary of USG Corporation