



# Woodlife<sup>®</sup>-F Clear Wood Preservative

- Water repellent preservative for exterior wood
- Protects against mildew, decay, rot and fungal stain
- Can be painted, stained or finished


Active Ingredients:  
3 Iodo-2-Propynyl Butyl Carbamate 0.50%  
Inert Ingredients 99.50%  
100.00%

EPA Reg. No. 1409-59  
EPA Est. No. 1479 MI 1

70798-00904  
70798-00856

**KEEP OUT OF REACH OF CHILDREN  
WARNING!**  
SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

- 5 U.S. GALLONS (18.92 LITERS)  
 55 U.S. GALLONS (208.19 LITERS)

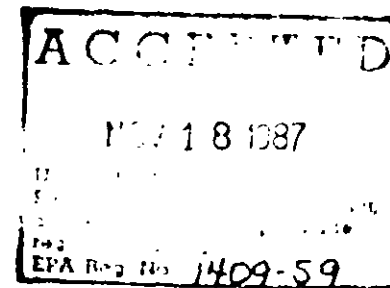

M

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND  
DOMESTIC ANIMALS  
WARNING!**

**KEEP OUT OF REACH OF CHILDREN**

**WARNING: CONTAINS PETROLEUM DISTILLATES** Use only with adequate ventilation. Avoid prolonged breathing of vapor or spray mist. Harmful if swallowed. Causes substantial but temporary eye injury. Do not get in eyes, on skin or on clothing. Wear goggles and rubber gloves when handling and rubber gloves and protective clothing when handling freshly treated lumber. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before re-use.

**STATEMENT OF PRACTICAL TREATMENT, IF ON SKIN.** Wash with plenty of soap and water. Get medical attention if irritation persists.

**IF SWALLOWED** Do not induce vomiting. Promptly drink a large quantity of milk, egg whites or gelatin solution, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention immediately.

**IF INHALED** Remove victim to fresh air.

**IF IN EYES** Flush with plenty of water. Get medical attention.

**NOTE TO PHYSICIAN** This product is a cholinesterase inhibitor. If signs of cholinesterase inhibition appear atropine only by injection is antidotal.

**ENVIRONMENTAL HAZARDS**

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

**PHYSICAL AND CHEMICAL HAZARDS**

**COMBUSTIBLE** Do not use, pour, or spill near heat or open flame. In case of fire, use water spray, foam, carbon dioxide or dry chemical.

**STORAGE AND DISPOSAL**

**STORAGE** Do not store near excessive heat.

**PESTICIDE DISPOSAL**

Do not contaminate water, food, or feed by storage or disposal. Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

**CONTAINER DISPOSAL** Triple rinse (or equivalent), then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

**PRODUCT INFORMATION**

Woodlife<sup>®</sup>-F Clear Wood Preservative is a blend of chemicals with the protection of an effective water repellent wood preservative.

Woodlife<sup>®</sup>-F Clear Wood Preservative penetrates into wood and controls the growth of decay fungi (like brown or white rot), staining fungi and surface mold (like black, brown or other colored mildew). It stabilizes wood against the effects of moisture and reduces dimensional change that can cause swelling, warping and splitting. No unpleasant odor. Will not crack, blister or peel.

**USES**

Woodlife<sup>®</sup>-F Clear Wood Preservative provides a protective, decorative finish for siding, fences, decks, patios, and other exterior wood products. This product may be used for protecting wooden roofs.

**COVERAGE**

100 to 150 sq. ft./gallon depending on the porosity of the wood.

**DIRECTIONS FOR USE**

Apply this product only as specified on the label. It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

This product must be applied out-of-doors to wood intended only for exterior use. (Note to User: Keep container closed when not in use.)

**PREPARATION**

1. For best results all cutting, gluing and sanding should be done before applying Woodlife<sup>®</sup>-F Clear Wood Preservative. Wood must be clean, dry and free from foreign material. This product can be used on unfinished new wood, unfinished weathered wood.
2. Stains and paints should be stripped for best results. Do not use steel wool. If mildew is present, remove by washing with a 50% dilution of household bleach (1/2 gallon of water) and then wash at once with clear water. Always wear rubber gloves, protective clothing and goggles when using bleach and oxalic acid.
3. Allow surface to dry before applying.

**APPLICATION**

1. Stir well before using. No thinning is required. The temperature of the wood and the Woodlife<sup>®</sup>-F Clear Wood Preservative should be 40°F or above.
2. This product may be applied only by roller or brush. Do not spray. When roller coating, use a brush to finish edges and grooves. Be sure to brush thoroughly so that all surfaces are completely wetted and covered. Coat side and end grain of wood with consecutive coats until its thirst for solution has been filled. If two coats are desired, be sure to apply the second coat before the first coat has dried.
3. Any surface cut after treatment should be retreated.

**DRYING TIME**

A minimum of 24-48 hours depending on conditions and method of application. On humid days, longer drying time may be required.

**CLEAN UP**

Use Mineral Spirits to remove wet Woodlife<sup>®</sup>-F Clear Wood Preservative from all surfaces, brushes and rollers.

**LIMITED WARRANTY**

Buyer assumes all risks of use, handling and storage of product not in strict accordance with label directions. Any implied warranty of merchantability or fitness for a particular use is limited to one year from date of purchase. Liability for any incidental or consequential damage or loss is specifically excluded at all times. If used for other than personal, family or household purposes, any implied warranty of merchantability or fitness for particular use is excluded. Seller will not accept liability for more than product replacement. Some states do not allow limitations on how long implied warranties last nor exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.



**Depend on DAP<sup>®</sup>**

Beecham Home Improvement Products, Inc.  
Dayton, Ohio 45401

Made and Printed in U.S.A.

6083

**BEST AVAILABLE COPY**