

FRONT PANEL

SEP 13 1989

WOODLIFE F CLEAR WOOD PRESERVATIVE
with Water Repellent

for Pressure-Treated and Untreated Wood

Clear

3 - WAY PROTECTION IN ONE COAT*

- o Mildew protection
- o Penetrating preservative protection against decay fungi
- o Water-repellent surface protection

Paintable and Stainable

Active Ingredients:	
3-Iodo-2-Propynyl Butyl Carbamate	0.50%
Inert Ingredients:	99.50%

	100.00%

Contains Petroleum Distillates

KEEP OUT OF REACH OF CHILDREN

WARNING

See back panel for additional Precautionary Statements

EPA Reg. No. 1409-59
EPA Est. No. 1409-OH-1

One U.S. Gallon (3.78 Liters)

* see Application directions.

SIDE PANEL

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: Harmful or fatal if swallowed or absorbed through skin. Causes eye and skin irritation. Use only in a well ventilated area. Do not breathe vapor. Do not get in eyes, or on skin or clothing. Wear goggles and rubber gloves when handling, and rubber gloves and protective clothing when handling freshly treated lumber. Wash thoroughly with soap and water after skin contact, especially before eating, drinking, or use of tobacco products. Remove contaminated clothing and wash thoroughly before reuse.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. If irritation develops, get medical attention.

IF IN EYES: Flush eyes with plenty of water. Get medical attention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.


IF SWALLOWED: Do not induce vomiting. Drink 1 or 2 glasses of water. Call a physician or poison control center immediately.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water when disposing of equipment washwaters.

PHYSICAL AND CHEMICAL HAZARDS

Do not use or store near heat or open flame. In case of fire, use water, spray, foam, carbon dioxide or dry chemical.

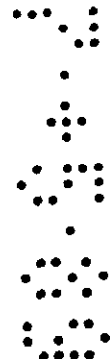

208 0

STORAGE AND DISPOSAL

STORAGE: Store in original container in locked storage area. Do not store near heat or open flame. Keep contents away from food and feed.

HOUSEHOLD: Do not reuse empty container. Securely wrap empty container in several layers of newspaper and discard in trash.

COMMERCIAL:

PESTICIDE DISPOSAL: Wastes resulting from use of this pesticide may be disposed of on site or at an approved waste disposal facility. Do not contaminate water, food or feed by storage or disposal.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

Product Information

Woodlife clear wood preservative is a blend of chemicals with the protection of an effective water repellent wood preservative.

Woodlife clear wood preservative penetrates into wood and controls the growth of decay fungi (like brown or white rot), staining fungi and surface mold (like black, brown or other colored mildew). It stabilizes wood against the effects of moisture and reduces dimensional change that can cause swelling, warping and splitting. No unpleasant odor. Will not crack, blister or peel.

Woodlife is a clear penetrating non-swelling paintable water repellent for natural wood surfaces. Is ready to use, and colorless when dry. Completes the total protection of pressure-treated wood.

Ideal for: All natural wood surfaces, unfinished new or unfinished weathered wood, and pressure-treated wood.

Uses

Woodlife clear wood preservative provides protective, decorative finish for siding, fences, decks, patios and other exterior wood products. This product may be used for protecting wooden roofs. Note: This product will not prevent the natural graying of wood.


Coverage

100 to 150 sq. ft./gal. depending on the porosity of the wood.

DEPEND ON DAP

DAP Inc. Dayton, Ohio 45401
A subsidiary of USG Corporation

Made and Printed in U.S.A.

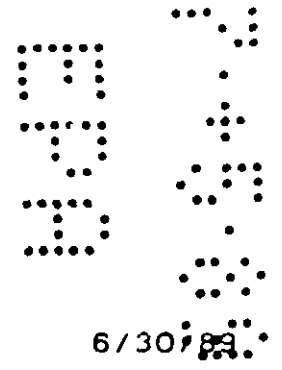

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Apply this product only as specified on the label.

This product must be applied out-of-doors to wood intended only for exterior use. (Note to User: Keep container closed when not in use!)

Preparation

- 1. For best results, all cutting, gluing and sanding should be done before applying Woodlife clear wood preservative. Wood must be clean, dry and free from foreign material. This product can be used on unfinished new wood, unfinished weathered wood and pressure treated wood.
- 2. Stains and paints should be stripped for best results. Do not use steel wool, if mildew is present, remove by washing with Woodlife Deck Cleaner and Brightener or a 50% dilution of household bleach followed by water. If extractive bleeding has occurred, scrub with a diluted solution of oxalic acid (1/4 lb. per gallon of water) and then wash at once with clear water. Always wear rubber gloves, protective clothing and goggles when using bleach and oxalic acid.
- 3. Allow surface to dry before applying.

APPLICATION


- 1. Stir well before using. No thinning is required. The temperature of the wood and the Woodlife clear wood preservative should be 40 F or above.
- 2. This product may be applied only by roller or brush. Do not spray. When roller coating, use a brush to finish edges and grooves. Be sure to brush thoroughly so that all surfaces are completely wetted and covered. Fully saturate side and end grain to give maximum protection. If two coats are desired, be sure to apply the second coat while the first coat is wet.
- 3. Any surface cut after treatment should be retreated.

Drying Time

Allow to dry a minimum of 24-48 hours before using treated surface or painting. On humid days, longer drying time may be required.


Clean Up

Use Mineral Spirits to remove wet Woodlife clear wood preservative from all surfaces, brushes and rollers.

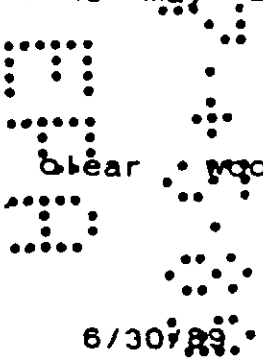

Limited Warranty

Buyer assumes all risks of use, handling and storage of product not in strict accordance with label directions. Any implied warranty of MERCHANTABILITY OR FITNESS FOR PARTICULAR USE is excluded. Liability for any incidental or consequential damage or loss is specifically excluded at all times. Seller will not accept liability for more than product replacement. Some states do not allow limitations on how long implied warranties last nor exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

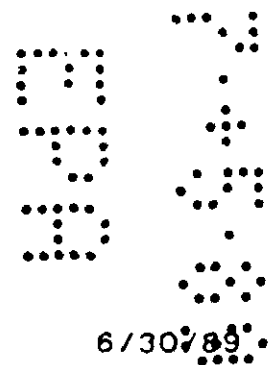

6/30/89