

PM 21

1409-65

107

US ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (75-767) WASHINGTON, DC 20460 NOTICE OF PESTICIDE: <input checked="" type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGISTRATION (Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)	EPA REGISTRATION NO. 1409-65	DATE OF ISSUANCE JUL 13 1994
	TERM OF ISSUANCE CONDITIONAL	
	NAME OF PESTICIDE PRODUCT WOODLIFE P WOOD PRESERVATIVE	

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

 DAP, Inc.
 P. O. Box 277
 Dayton, OH 45401

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for reregistration of your product under FIFRA section 4.

2. Make the labeling changes listed below before you release the product for shipment:

- Add the phrase "EPA Registration No. 1409-65."

3. This product is conditional registration of a period of two years from this date. During this period, you must satisfy data requirements for the following studies:

- a. Acute inhalation, Guidelines Ref. #81-3
- b. Dermal irritation, " " #81-5
- c. Dermal sensitization " " #81-6

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL _____ DATE JUL 13 1994

4. This registration will expire automatically on July 13, 1996 if you fail to adhere to the requirements outlined herein.

5. Submit five (5) copies of your final printed labeling before you release the product for shipment.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the labeling is enclosed for your records.

Steve Robbins
Acting Product Manager (21)
Fungicide-Herbicide Branch
Registration Division (H7505C)

Enclosure

MASTER LABEL

**WOODLIFE®-P
WOOD PRESERVATIVE
with water repellent**

KEEP OUT OF REACH OF CHILDREN

CAUTION

See Side Panel for Additional Precautionary Statements

READ THE LABEL BEFORE USING

Active Ingredient:

Propiconazole: 1-[2-(2,4'-dichlorophenyl)-4-propyl-1,3-dioxolan-2-yl-methyl]-1H-1,2,4-triazole.....0.5%

Inert Ingredients:*..... 99.5%

TOTAL.....100.0%

*Contains Petroleum Distillates

BEST AVAILABLE COPY

ACCEPTED
July 13, 1994
1409-65

EPA Reg. No. 1409-

EPA Est. No. 1409-OH-1

7/1/93

107 0

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
CAUTION!**

Harmful if absorbed through skin. May cause eye or skin irritation. Avoid contact with eyes, skin and clothing. Wear goggles and rubber gloves when handling, and rubber gloves, long sleeved shirt and pants when handling freshly treated lumber. Wash thoroughly with soap and water after handling and before smoking or eating. Remove contaminated clothing and wash before re-use.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists.

IF IN EYES: Flush with plenty of water. Get medical attention if irritation persists.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water, or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment washwaters.

PHYSICAL AND CHEMICAL HAZARDS

Do not use or store near heat or open flame. In case of fire, use water spray, foam, carbon dioxide or dry chemical.

STORAGE AND DISPOSAL

STORAGE: Do not store near excessive heat.

HOUSEHOLD: Do not reuse original container. Wrap securely in several layers of newspaper and discard in trash.

COMMERCIAL

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

BEST AVAILABLE COPY

7/1/93

5. 6

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

DESCRIPTION: Woodlife®-P Wood Preservative is a clear penetrating paintable, water repellent preservative for wood. It protects against decay fungi (such as brown or white rot), staining fungi (such as blue stain), surface mold (for example, black, brown or other colored mildew) and dimensional change.

PRODUCT USES: Use for above ground applications, including millwork, shingles, siding, plywood, hardboard, flakeboard, structural lumber, fences, decks, etc. Do not use on wood which will come in contact with food.

PREPARATION: Wood must be clean and dry. Machine, cut, glue, and sand wood as desired before treating. Do not use over previously finished or stained wood without stripping off old finish. Do not use steel wool.


FOR HOUSEHOLD USE:

APPLICATION: Treating solution, wood, and surrounding air must be above 40° F (4.4° C). Apply by brush or roller coater to refusal. Do not spray. When roller coating, use a brush to finish edges and grooves. Be sure to brush thoroughly so that all surfaces are completely wetted and covered. Fully saturate side and end grain to give maximum protection. If two coats are desired, be sure to apply the second coat while the first coat is wet. Wood can also be treated by dipping. Immerse large pieces or wood assemblies for 3 minutes. For individual or small pieces, 15 second immersion is adequate. Any surface cut after first treatment should be retreated. Keep container closed when not in use.

COVERAGE: Woodlife®-P Wood Preservative covers up to 150 sq. ft. per gallon, depending on the porosity of the wood.

DRYING TIME: Before painting or varnishing, treatment should be completely dry and odor-free. Use a sealer such as shellac before using lacquers. Allow to dry a minimum of 24-48 hours before using treated surface or painting. On humid or cold days, longer drying time may be required.

CLEAN-UP: Use mineral spirits to remove wet preservative from all surfaces, brushes and rollers.

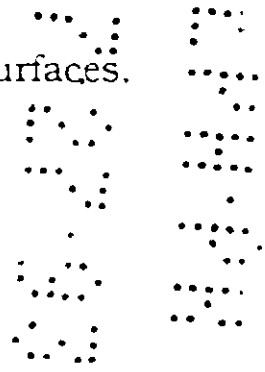

BEST AVAILABLE COPY

For Commercial Application:

APPLICATION: Treating solution, wood, and surrounding air must be above 40° F (4.4° C). Apply by immersion, flood coater, roller coater or brush. Any surface cut after first treatment should be retreated.

IMMERSION: For bundle dipping of millwork or other items to be painted, immerse for 3 minutes; for individual parts, a 15 second treatment is adequate. Treatment should be in accordance with Industrial Standard IS-4. Use only on items for above ground exposure.

RETENTION: 3-minute immersion --- 8-12 gallons per MBF (i.e. 1,000 Board Feet), 15 second immersion --- 5-10 gallons per MBF. Brush and roller application --- 150 sq. ft. per gallon, but varies by species and condition of substrate.

FINISHING: Before glazing, painting, or varnishing, treatment should be completely dry and odor-free. Use a sealer such as shellac before using lacquers.

DRYING TIME: Allow 24-48 hours under conditions of average temperature and humidity. Can be heat dried for plant production.

CLEAN-UP: Use mineral spirits to remove wet preservative from all surfaces, brushes and rollers.

LIMITED WARRANTY

Buyer assumes all risks of use, handling and storage of product not in strict accordance with the label directions. Any implied warranty of MERCHANTABILITY OR FITNESS FOR PARTICULAR USE is excluded. Liability for any incidental or consequential damage or loss is specifically excluded at all times. Seller will not accept liability for more than product replacement. Some states do not allow limitations on how long implied warranties last nor exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state.

DAP Inc., Dayton, Ohio 45401
Made and Printed In U.S. A.

72133

BEST AVAILABLE COPY

7/1/93