



**COMPANY
NUMBER** _____

1448-

**PRODUCT
SERIAL NO.** _____

30

**LABEL
APPROVAL
DATE** _____

5-16-85



BUSAN[®] 25

ACTIVE INGREDIENTS:

2 (Thiocyanomethylthio)benzothiazole	13.3%
2 Hydroxypropyl methanethiolsulfonate	11.7%
INERT INGREDIENTS	75.0%
TOTAL	100.0%

EPA REG. NO. 1448-30

**KEEP OUT OF REACH OF CHILDREN
DANGER**

STATEMENT OF PRACTICAL TREATMENT

If product gets in eyes, flush with copious amounts of clean, cool water for 15 to 20 minutes. Get medical attention immediately. In case of skin contact, wash promptly and thoroughly with abrasive soap and cool water and finally with glycerin. In case of persistent irritation of the skin, obtain medical attention. If product is swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately. **NOTE TO PHYSICIAN:** Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression, and convulsion may be needed.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid breathing vapors.


ENVIRONMENTAL HAZARDS: This product is toxic to fish. Do not discharge of effluent containing this product into lakes, streams, ponds, estuaries, oceans, or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL AND CHEMICAL HAZARDS: Do not use or store near heat or open flame.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product with its labeling.

Busan 25 is used to control slime in pulp and paper mill rate of 1.5 to 15 ppm during the period of treatment, base and water at maximum dilution. The addition is usually made once each 8 hr. or once each 12 hr. Under average conditions the addition is made once each 24 hr. The addition should be made with good mixing and agitation will ensure uniform distribution of Busan 25 in fiber and water. Information on these and other applications is available upon request when a detailed description of the problem is provided.

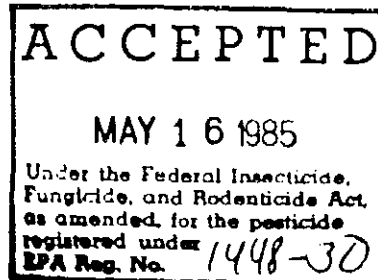

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal. **STORAGE:** Do not expose to extreme temperatures. Store drums high. Drums should be opened in well-ventilated area. Drums should be placed in overpack drums for disposal. Do not mix with sawdust or sand and disposed of in a sanitary landfill.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Excess pesticide, spray mixture, or rinsate is a violation of Federal law and cannot be disposed of by use according to label instructions. Contact Pesticide or Environmental Control Agency, or the Hazardous Waste Management and Emergency Response (HWEM) Division of your EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent) and reuse for recleaning, or puncture and dispose of in a sanitary landfill or by other means allowed by state and local authorities, by burning, if burning is permitted.

BUCKMAN LABORATORIES, INC.

1256 N. McLEAN BLVD., MEMPHIS, TENN. 38108
EPA ESTABLISHMENT NO. 1448-TN-1

NET CONTENTS MARKED ON CONTAINER

**COMPANY
NUMBER** 1757-

**PRODUCT
SERIAL NO.** 40

**LABEL
APPROVAL
DATE** 5-17-85