

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Technical assistance in applying BUSAN 30 for microorganism control as described in the following is available upon request when a description of the problem is provided.

LEATHER: Busan 30 is recommended for the prevention of mold, bacteria and fungi in the storage, transport and processing of wet leather stock such as pickled, vegetable-, chrome-, alternative metal or metal free tanned hides and skins. Dosage rates of 0.025-0.2% (250-2,000 ppm) of Busan 30 can be used on the white lime stock weight basis to prevent microbial growth on processed hides and skins. The dosage level used will depend on storage conditions and the length of protection required. A satisfactory dilution of 1 part Busan 30 plus 5 parts water can be prepared by adding the Busan 30 to water (as opposed to adding water to Busan 30) with agitation. The diluted product can then be added to the pickling liquor, or to the tanning liquor at the start of the tanning process or to the rinse water in a post tanning reflow. The product can also be applied during the fatiquoring process to prevent fungal growth at 0.025-0.2% (250-2,000 ppm) based on the split and shaved weight of leather being processed. Busan 30 can be used at the dosage rates suggested above in the processing of U.S. military specification shoe upper leathers. For preservation of leather finishing pastes and fatiquors, Busan 30 can be added at a dosage rate of 0.1 - 0.25% (1000-2500 ppm) based on the weight of the treated paste or fatiquor and mixed thoroughly to insure adequate dispersion.

PULP MILLS: To protect wood chips from fungal degradation during storage, Busan 30 is used at 0.5 to 2 lb/ton of oven-dry wood. It can be applied through a water shower located in the pneumatic conveyor carrying chips from the chipper to the storage pile. For preservation of wet lap or sheet pulp, Busan 30 is used at 0.5 to 4 lb/ton of oven-dry fiber. It is applied to the surfaces of the dewatered pulp by means of applicator rolls.

PAPER MILLS: To control bacterial and fungal growth on paper and paperboard machines, Busan 30 is added to the white water or stock at 0.1 to 0.5 lb/ton of dry paper or paperboard produced. To make mold-resistant paper or paperboard, Busan 30 is used at 0.05 to 0.1 lb/1000 sq ft (0.15 to 0.3 lb/3000 sq ft) of surface. For coated paper or board, Busan 30 is incorporated in the coating mix prior to application of the coating. For uncoated paper or board, Busan 30 is dispersed in water, surface-sizing solution, or other solvent and applied to the surface to be protected by means of an applicator roll. For the preservation of agricultural mulch paper, Busan 30 is used at 1.5 to 5 lb/ton air-dry paper. It is applied to the surfaces of the mulch paper by tub-sizing methods or by means of applicator rolls before the paper is coated.

PARTICLE BOARD: Busan 30 is employed as a preservative for particle board, insulation board, and other wood-base fiber and particle panel materials. In this use, Busan 30 is mixed with the resin or binding agent at 0.1 to 1% based on the dry weight of the wood.

SAPSTAIN CONTROL: Busan 30 is used to control sap stain and mold on freshly cut softwood and hardwood lumber, logs, poles, posts, and timbers. It is applied by dipping or pressure impregnation of the wood with a dispersion containing 0.5 to 8 gal of Busan 30 per 100 gal of water. Treatment should be made within 24 hr of cutting or sawing, particularly in warm weather, and treated wood should not be exposed to heavy rains soon after treatment.

COOLING TOWERS: Busan 30 is used to protect cooling tower wood against soft or surface rot and internal or dry rot. It is applied by painting a dispersion containing 0.5 to 0.7% Busan 30 in water onto the clean wood surfaces. The amount applied should provide 0.6 to 0.8 lb Busan 30 per 1000 sq ft of wood surface. Soft or surface rot can also be inhibited by periodic shock doses of Busan 30 to the recirculating cooling water at the tower basin or cold well. The dosage should provide 1.25 lb of Busan 30 per 1000 gal of water and the bleedoff should be stopped for 4 to 6 hr after treatment. The shock treatment should be repeated every four months.

COOLING WATER: Busan 30 is used to control algae, bacteria, and fungi in industrial recirculating cooling water systems. Before treatment is begun, the system should be cleaned thoroughly to remove old algal growth, microbiological slime, and other deposits. The system should then be drained, flushed, refilled with water, and treated with an initial dose of 0.6 to 3.7 fl oz Busan 30 per 1000 gal water in the system. Subsequent additions of 0.2 to 1.2 fl oz per 1000 gal should be made every 1 to 5 days, depending on amount of bleedoff and severity of microbiological fouling.

COATINGS, CAULKING-SEALANTS & WALLCOVER ADHESIVES: Busan 30 is added with sufficient mixing ensuring dispersion at levels of 0.5 to 5.0% based on the total formulation weight. Busan 30 will inhibit the growth of fungi (mold, "mildew") that often cause discoloration and degradation of these compounds. Busan 30 is added at 0.5 to 5.0% based on the total weight of the formulation to prevent fungal disfigurement and deterioration. For solvent-based formulations Busan 30 can be dissolved in aromatic solvents or combinations of aromatic and aliphatic solvents and added in the let down or added directly to the finished products. For water-thinned latex emulsion formulations, Busan 30 can be premixed with the wetting agent and added to the pigment slurry or simply added to the let down or finished product.

DRILLING FLUIDS: To inhibit bacterial and fungal degradation of the fluids or muds used in the drilling of wells, Busan 30 is incorporated in the drilling fluid at concentrations of 0.05 to 0.25% based on the total wet weight of the fluid.

PETROLEUM SECONDARY RECOVERY: Busan 30 is used to control sulfate-reducing bacteria, slime-forming bacteria and fungi in oil-field water, polymer, or micellar floods, water-disposal systems, and other oil-field water systems at dosage rates of 0.2 to 3.7 fl oz of Busan 30 per 1000 gal of water treated. Additions should be made continuously or intermittently by means of a metering pump at the free water knockouts, before or after injection pumps and injection well headers. Continuous Feed Method: When system is noticeably fouled, add 0.6 to 3.7 fl oz Busan 30 per 1000 gal of water continuously until desired degree of control is achieved. Then treat with 0.2 to 1.2 fl oz Busan 30 per 1000 gal of water continuously, or as needed to maintain control. Intermittent or Slug Method: When system is noticeably fouled, or to maintain control, add 0.6 to 3.7 fl oz Busan 30 per 1000 gal of water for 4 to 8 hr per day and 1 to 4 times per week, or as needed to maintain control.

CUTTING FLUIDS: Busan 30 is used to inhibit bacterial and fungal degradation of water-based and water-soluble or emulsifiable cutting fluids and coolants used in metalworking operations. It should be added to the diluted cutting fluid at a rate that will provide 150 to 250 parts per million Busan 30 (weight/weight) after final dilution with water. To prevent fungal growth on the inside walls of the diluted metalworking fluid storage tanks, higher concentrations of Busan 30 are needed. For this application, it is recommended that Busan 30 be added to the diluted fluid as it is prepared to provide a concentration of 1000 to 1250 parts per million.

TEXTILES: Busan 30 is an emulsifiable microbicide concentrate used to inhibit the growth of fungi that cause textile rotting. Apply Busan 30 to an emulsion of convenient concentration of 1 - 5% and then should be impregnated into the fabric using conventional padding or sizing equipment. Depending on the degree of preservation required, treatment levels may vary between 0.5 - 2.0 % based on fabric weight.

WASTE WATER TREATMENT SYSTEMS: When used as directed, Busan 30 controls bacteria and fungal slime in waste water systems and effluents. The quantity of Busan 30 required varies with the degree of fouling. It should be added at a rate that will provide 10 to 30 parts per million Busan 30 (weight/weight) of the waste water. This addition can be made at various points in the system including the influent to the clarifier and/or the holding basins or ponds. **Not registered for this use in California.**


Storage and Disposal

Do not contaminate water, food, or feed by storage or disposal.

PESTICIDE STORAGE: Do not expose to extreme temperatures. If applicable, do not stack more than four drums high. Containers should be opened in well-ventilated areas. Leaking or damaged drums should be placed in overpack drums for disposal. Spills should be absorbed in sawdust or sand and disposed of in a sanitary landfill. Keep container closed when not in use.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at your EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

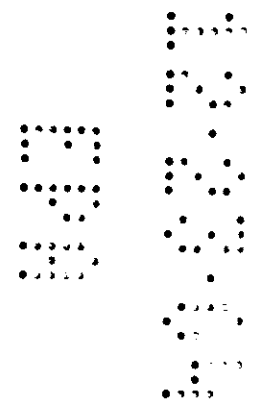

Manufactured by

Buckman Laboratories, Inc.

1256 North McLean Blvd.
Memphis, Tennessee 38108, USA

(901) 278-0330 or 1-800-BUCKMAN

EPA Est. No. **1448-TN-1**

EPA Reg. No. **1448-55**

Product Weight **9 lbs./gal. 1.08 kg/l**

Net contents are marked on the container.

HMIS / NPCA Ratings

Health **3** Flammability **2** Reactivity **1**

Last Revision **12/20/2004**

30.0%
70.0%
100.0%

OF CHILDREN

for 15-20 minutes.
minutes, then continue rinsing eye.
ment advice.

minutes.
advice.

treatment advice.

poison control center or doctor.
person.

e, then give artificial respiration, preferably by

ment advice.

R
Control Center or doctor or going for treatment
emergency medical treatment information.

N

age.

ements

DOMESTIC ANIMALS

This product may cause allergic skin reactions.
Wear goggles or face shield and rubber gloves
ing. Remove contaminated clothing and wash

t use in offshore or estuarine drilling operations.
e surface water is present or to intertidal areas
ining this product into lakes, streams, ponds,
s of a National Pollutant Discharge Elimination
notified in writing prior to discharge. Do not
previously notifying the local sewage treatment
gional Office of the EPA.
eat or open flame.

ACCEPTED

JAN 17 2005

the Federal Insecticide, Fungicide, and
icide Act as amended, for the
le, registered under
g. No. **1448-55**

1448-55

01/17/2005

11