

111-1 111-2-342 1041

BUSAN 1130

BUSAN is a registered trademark.

**KEEP OUT OF REACH OF CHILDREN
DANGER**

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Fatal if spray mist is inhaled under prolonged exposure. Do not breath mist. Corrosive. Causes severe eye and skin damage. Harmful or fatal if swallowed. Causes dermal sensitization. Do not get in eyes, on skin or on clothing. Avoid contamination of food. Wear goggles or face shield and rubber gloves when handling. Wash thoroughly after use.

Statement of Practical Treatment: In case of skin contact, wash with plenty of soap and water. Using gloves, remove contaminated clothing. Wash clothes before reuse. If product gets into eyes, flush immediately with large amounts of clean, cool water for 15 minutes. Get medical attention immediately.

If product is swallowed, DO NOT INDUCE VOMITING. Rinse mouth with large amounts of tap water. Drink slowly one or two glassfuls of water. Contact a physician or Poison Control Center immediately. In cases where the individual is unconscious, do not give fluids by mouth. Avoid alcohol, alcohol containing products or other drugs or substances as antidotes.

Note to physician: Probable mucosal damage may contraindicate gastric lavage.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

STORAGE: Do not expose to extreme temperatures. Do not stack more than five drums high. Drums should be opened in well-ventilated areas. Leaking or damaged drums should be placed in overpack drums for disposal. Spills should be absorbed in sawdust or sand and disposed of in a sanitary landfill. Keep container closed when not in use.

PESTICIDE DISPOSAL: Pesticide waste are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these waste cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at your EPA Regional Office for guidance.

CONTAINER DISPOSAL Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

To control bacterial and fungal slime in pulp and paper mills, Busan 1130 is employed at 0.3 to 3 kg per tonne (0.6 to 6 lb per ton) of pulp or paper (dry basis) added to the white water or stock at a point of good agitation ahead of where the slime is forming. To supplement or replace chlorine in the treatment of freshwater used on a paper machine, use Busan 1130 at concentrations of 3 to 12 parts per million (ppm). To prevent spoilage of slush pulp in storage, add Busan 1130 in a manner


ACTIVE INGREDIENTS:
2-Bromo-4'-hydroxyacetophenone 10.0 %
INERT INGREDIENTS: 90.0 %

that will ensure uniform distribution throughout the mass of pulp. For slush pulp that will be held in storage for more than 4 hours but not more than 1 week, treat this pulp with 0.3 to 0.9 kg of Busan 1130 per tonne (0.6 to 1.8 lb per ton) of moisture-free pulp. When microbiologically contaminated pulp or recycled fiber (waste paper) is added to the system, use a supplementary treatment of Busan 1130. To each beater or pulper add 0.3 kg of Busan 1130 per tonne (0.6 lb per ton) of moisture-free fiber to help keep the system free of slime. For treatment of the broke to help control slime, use Busan 1130 at 0.3 to 0.9 kg per tonne (0.6 to 1.8 lb per ton) of dry broke.

To inhibit the growth of bacteria that cause the degradation of papermaking chemicals, such as animal glue solutions, clay slurries, starch slurries and solutions, or coating formulations, use 150 to 600 ppm of Busan 1130, based on the total wet weight of slurry, emulsion or solution to be protected.

To inhibit the growth of fungi that cause the degradation of papermakers' alum solutions, use 150 to 300 ppm Busan 1130 based on the total wet weight of the solution.

Busan 1130 is used to inhibit the growth of bacteria that cause loss of viscosity in emulsion paints, adhesives, waxes, and polishes. Busan 1130 is added at rates of 0.3 to 1.5% based on the weight of the emulsion. This product is not to be used adhesives which may contact food.

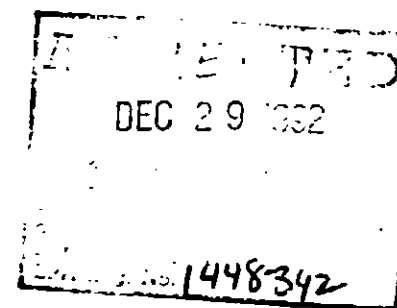

HMS/NPCA RATING
Health 3 Flammability 2 Reactivity 1

Product Weight: 9 lbs/gal 1.08 kg/l
NET CONTENTS MARKED ON CONTAINER

EPA Reg. No. 1448-342

Manufactured By EPA Est. No. 1448-TN-1
BUCKMAN LABORATORIES, INC.
1256 N. McLEAN BLVD., MEMPHIS, TN 38108 USA
(901) 278-0330 or 1-800-BUCKMAN