

WSKT-10

**KEEP OUT OF REACH OF CHILDREN
DANGER**

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. Causes eye damage and skin burns. May cause allergic skin reaction. Harmful if inhaled. May be fatal if swallowed or absorbed through skin. Do not get in eyes, on skin, or clothing. Wear goggles or face shield and rubber gloves when handling. Avoid breathing vapor or mist. Avoid contamination of food. Do not take internally. Wash thoroughly with soap and water after handling.

Statement of Practical Treatment:

If Swallowed: Do not induce vomiting. Drink promptly a large quantity of egg whites, gelatin solution, or, if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately. Never give anything by mouth to an unconscious person. **If Inhaled:** Remove immediately to fresh air. If not breathing apply artificial respiration. If breathing is difficult give oxygen. Call a physician. **If on Skin:** Wash thoroughly with soap and water. Remove and wash contaminated clothing before re-use. **If in Eyes:** Flush with plenty of water for 15 minutes. Call a physician. **NOTE TO PHYSICIAN:** Probable mucosal damage may contraindicate the use of gastric lavage.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish and wildlife. Do not discharge effluent containing this product into lakes streams, ponds, estuaries, oceans, or public waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this pesticide only as specified on the label.

STORAGE AND DISPOSAL

PROHIBITIONS: This product is corrosive to mild steel. Do not store or transport in unlined metal containers. Do not contaminate food or feed by storage, disposal or cleaning of equipment.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative of the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: **METAL CONTAINERS:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by other procedures approved by state and local authorities. **PLASTIC CONTAINERS:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

GENERAL: CONSULT FEDERAL, STATE OR LOCAL DISPOSAL AUTHORITIES FOR APPROVED ALTERNATIVE PROCEDURES.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

COOLING WATER SYSTEMS: WSKT-10 may be used to control the growth of microorganisms including bacteria, algae, and

ACTIVE INGREDIENTS:

Poly[oxyethylene(dimethyliminio)ethylene] 6.0 %
(dimethyliminio) ethylene dichloride]
5-Chloro-2-Methyl-4-isothiazolin-3-one 52%
2-Methyl-4-isothiazolin-3-one 18%


INERT INGREDIENTS: 93.3 %

fungi in recirculating cooling water systems. In noticeably fouled systems, WSKT-10 should be added at a dosage rate of 11.6 to 69.6 fluid ounces per 1000 gallons of system water (100 to 600 ppm WSKT-10). Extremely fouled systems should be cleaned to remove excess algal growth, excessive biofilm, and other deposits prior to program initiation. Subsequent additions of 11.6 to 34.8 fluid ounces of WSKT-10 per 1000 gallons of system water (10 to 300 ppm WSKT-10) should be made to maintain control.

AIR WASHER SYSTEMS: WSKT-10 may be used to control microbiological fouling in industrial airwash systems. Extremely fouled systems should be cleaned prior to addition of WSKT-10. When systems are noticeably fouled, WSKT-10 should be added at an application rate of 11.6 to 92.8 fluid ounces per 1000 gallons of system water (100 to 800 ppm WSKT-10) daily until control is evident. Subsequent additions of 11.6 to 58.0 fluid ounces per 1000 gallons of system water (100 to 500 ppm WSKT-10) should be added as needed to maintain control.

METALWORKING FLUID SYSTEMS: WSKT-10 may be used to prevent microbial degradation and fouling in metalworking fluid systems. WSKT-10 should be added tank-side to the system at 23.2 to 232 fluid ounces per 1000 gallons of dilute fluid (200 to 2000 ppm product) as needed to maintain control. Systems with excessive fouling should be cleaned prior to initiating the program.

FIRE WATER PROTECTION SYSTEMS: WSKT-10 can be added to help control microorganisms which may foul or cause corrosion in fire water protection systems. WSKT-10 should be added to the system at a point where it will be adequately distributed throughout the system. WSKT-10 should be fed to maintain 200 to 800 ppm of product in the system. This will require an initial dose of 23.2 to 92.8 fluid ounces per 1000 gallons of water. Subsequent doses should be evaluated based on microbiological activity and product level testing.

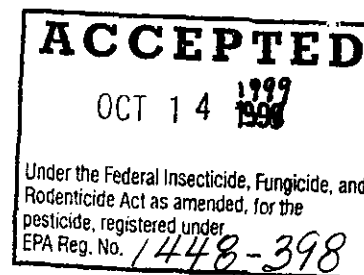

PM34 1448-398 10/14/99

HMIS/NPCA RATING
Health 3 Flammability 1 Reactivity 1

Product Weight: 8.7 lbs./gal. 1.04 kg/l
NET CONTENTS MARKED ON CONTAINER
EPA Reg. No. 1448-398

Manufactured By EPA Est. No. 1448-TN-1
BUCKMAN LABORATORIES, INC.
1256 N. McLEAN BLVD., MEMPHIS, TN 38108 USA
(901) 278-0330 or 1-800-BUCKMAN

1001