

ACTIVE INGREDIENT(S)

Propiconazole*	1.0%
1-[2-(2,4-dichlorophenyl)-4-propyl-1,3-dioxolan-2-yl]-methyl-1H-1,2,4-triazole...	25.0%
N,N-Didecyl-N,N-dimethylammonium chloride	70.0%
INERT INGREDIENTS	70.0%
TOTAL	100.0%

KEEP OUT OF REACH OF CHILDREN DANGER

FIRST AID

If in Eyes	- Hold eye open and rinse slowly and gently with water for 15-20 minutes. - Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. - Call a poison control center or doctor for further treatment advice.
If on Skin, Clothes	- Take off contaminated clothing. - Rinse skin immediately with plenty of water for 15-20 minutes. - Call a poison control center or doctor for treatment advice.
If Swallowed	- Call poison control center or doctor immediately for treatment advice. - Have person sip a glass of water, if able to swallow. - Do not induce vomiting unless told to do so by the poison control center or doctor. - Do not give anything by mouth to an unconscious person.
If Inhaled	- Move person to fresh air. - If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth if possible. - Call a poison control center or doctor for further treatment advice.

HOT LINE NUMBER

Have the product container or label with you when calling a Poison Control Center or doctor or going for treatment. You may also contact 901-278-0330 or 1-800-BUCKMAN for emergency medical treatment information.

Precautionary Statements

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. Causes skin burns and irreversible eye damage. May be fatal if inhaled. Harmful if swallowed or absorbed through skin. Do not get in eyes, on skin, or on clothing. Wear protective clothing, goggles or face shield and chemical resistant gloves. Do not breathe vapor or spray mist. Wear a respirator with an organic-vapor removing cartridge with a prefilter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NIOSH approval number prefix TC-14G), or a NIOSH approved respirator with an organic vapor (OV) cartridge or canister with any R, P or HE prefilter. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash clothing before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water. Do not contaminate water when disposing of equipment washwaters. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.
For Commercial and Industrial Use Only


WOOD PROTECTION: BUSAN 1357 is surface applied to freshly sawn hardwood and softwood lumber, logs, poles, posts and timbers to protect it from the fungi that cause sapstain and mold. For good wood protection, application rates used in dip treatment and spray treatment methods will vary according to the environmental conditions expected during storage and transport including temperature, humidity, wood moisture content, etc. Hard woods such as Oak, Maple, and Yellow Poplar require an application rate of 0.5 to 2.0 gallons of BUSAN 1357 per 100 gallons of water when stored and shipped as follows: green, air-dry, kiln-dry. Soft woods such as Pine, Douglas fir and Hemlock Poplar require an application rate of 0.5 to 2.0 gallons of BUSAN 1357 per 100 gallons of water when stored and shipped as follows: green, air-dry, kiln-dry. Remove sawdust and other debris from wood treatment solutions on a regular basis to maintain the correct strength of BUSAN 1357. To prevent the growth of fungi below the surface of treated wood, freshly sawn wood should be treated within 24 hours of sawing. Treated lumber should be protected from rain and removed from soil/ground contact. For application advice, contact your local Buckman Laboratories representative.

Application by dip treatment: BUSAN 1357 is applied by dipping the wood until complete surface wetting is achieved. Prepare the dip treatment solution by mixing 0.5 gallons to 2.0 gallons of BUSAN 1357 per 100 gallons of water. Vigorously agitate the mixture until the BUSAN 1357 is completely dispersed. In dip treatment applications wood should be completely submerged in the treating solution for 1 to 5 minutes.

Application by conventional spray treatment: BUSAN 1357 is applied to wood by conventional spray treatment methods until complete surface wetting is achieved. Prepare the spray treatment solution by mixing 0.5 to 2.0 gallons of Busan 1357 per 100 gallons of water. Vigorously agitate the mixture until the BUSAN 1357 is completely dispersed.

Application by electrostatic spray treatment: BUSAN 1357 is applied to wood by electrostatic spray treatment methods until complete surface wetting is achieved. Apply BUSAN 1357 directly to wood or dilute first with water prior to application. When applying BUSAN 1357 directly to wood, the treatment strength is varied by the number of application nozzles used and the line speed. When diluting with water, prepare the spray treatment solution by mixing 0.5 to 2.0 gallons of BUSAN 1357 per 100 gallons of water. Vigorously agitate the mixture until the BUSAN 1357 is completely dispersed.

* Active ingredient developed by Janssen Pharmaceutica, Beerse, Belgium

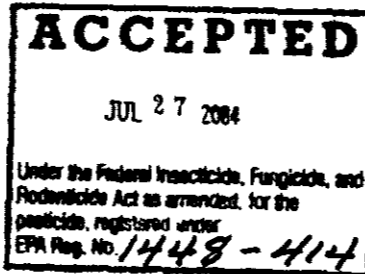

Storage & Disposal

Do not contaminate water, food or feed by storage or disposal.
PESTICIDE STORAGE: Store in original container in a cool, dry place.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA regional office for guidance.

CONTAINER DISPOSAL (METAL): Triple rinse (or equivalent) then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill or by other procedures approved by State and Local authorities.

CONTAINER DISPOSAL (PLASTIC): Triple rinse (or equivalent) then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill, or incineration, or if approved by State and Local authorities, by burning. If burned, stay out of smoke.

Manufactured by
Buckman Laboratories, Inc.
1256 North McLean Blvd.
Memphis, Tennessee 38108, USA
(901) 278-0330 or 1-800-BUCKMAN

EPA Est. No. 1448-TN-1
EPA Reg. No. 1448-414
Product Weight 8.5 lbs./gal. 1.0 kg/L
Net contents are marked on the container.

HMIS / NPCA Ratings

Health **3** Flammability **2** Reactivity **1**
Last Revision 4/22/2004

1448-414

07/27/2004

1/1