

1448-438

1/29/2009

1/5



U.S. ENVIRONMENTAL PROTECTION AGENCY

Office of Pesticide Programs
Antimicrobials Division (7510C)
1200 Pennsylvania Avenue NW
Washington, D.C. 20460

EPA Reg. Number:
1448-438

Date of Issuance:
JAN 29 2009

Term of Issuance:
Conditional

Name of Pesticide Product:
BUSAN 1223

NOTICE OF PESTICIDE:

Registration
 Reregistration

(under FIFRA, as amended)

Name and Address of Registrant (include ZIP Code):

Buckman Laboratories, Inc.
256 N. McLean Blvd.
Memphis, TN 38108

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA section 4.
2. Make the labeling changes listed below before you release the product for shipment:
 - a. Revise the "EPA Registration Number to read, "EPA Reg. No. 1448-438".

Signature of Approving Official:

Marshall Swindell
Product Manager Team-33
Regulatory Management Branch I
Antimicrobials Division (7510P)

Date:

JAN 29 2009

Page 2
EPA Registration No. 1448-438

3. Submit two (2) copies of your final printed labeling before distributing or selling the product bearing the revised labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the "accepted" label is enclosed for your records.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely,



Marshall Swindell
Product Manager 33
Regulatory Management Branch I
Antimicrobials Division (7510P)

Enclosure

It is a violation of Federal law to use this product in a manner inconsistent with the label. **NOTE TO USER:** Do not apply this product in a way that


ACTIVE INGREDIENT(S)	
2-(Thiocyanomethylthio)benzothiazole.....	10.0%
Methylene bis(thiocyanate).....	10.0%
INERT INGREDIENTS	80.0%
(Contains Heavy Aromatic Naphtha & Petroleum Distillates)	
TOTAL	100.0%

This product contains 0.84 lbs. of active ingredient per gallon.

KEEP OUT OF REACH OF CHILDREN
DANGER PELIGRO

SAPSTAIN AND MOLD CONTROL: BUSAN 1223 is used on hardwood and softwood lumber, logs, poles, posts and other wood products. When complete surface wetting is accomplished. Use 0.5 to 1.0 (5 to 18 lbs of BUSAN 1223/100 gallons water) and agitated. Rates to be used will vary according to tree conditions, etc. Under conditions suitable for aggressive mold should be used. Treatment should be made as quickly as possible within 24 hours after cutting.

FIRST AID	
If in Eyes	- Hold eye open and rinse slowly and gently with water for 15-20 minutes. - Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. - Call a poison control center or doctor for further treatment advice.
If on Skin, Clothes	- Take off contaminated clothing. - Rinse skin immediately with plenty of water for 15-20 minutes. - Call a poison control center or doctor for treatment advice.
If swallowed	- Call poison control center or doctor immediately for treatment advice. - Have person sip a glass of water, if able to swallow. - Do not induce vomiting unless told to do so by the poison control center or doctor. - Do not give anything by mouth to an unconscious person.
If Inhaled	- Move person to fresh air. - If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth if possible. - Call a poison control center or doctor for further treatment advice.
HOT LINE NUMBER	
Have the product container or label with you when calling a Poison Control Center or doctor or going for treatment. You may also contact 901-278-0330 or 1-800-BUCKMAN for emergency medical treatment information.	
NOTE TO PHYSICIAN	
Probable mucosal damage may contraindicate the use of gastric lavage. This product may pose an aspiration pneumonia hazard. Contains petroleum distillate.	

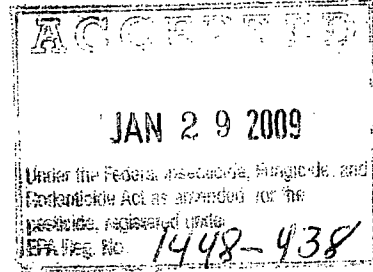

Precautionary Statements

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER - Corrosive: Causes irreversible eye damage or skin burns. May be fatal if swallowed or inhaled. Do not get in eyes, on skin, or on clothing. Do not breathe vapor. Prolonged or frequently repeated skin contact may cause allergic reaction in some individuals. For handling activities during exposures, wear either a respirator with an organic vapor removing cartridge with a prefilter approved for pesticides (MSHA/NIOSH approval number prefix 23C), or a canister approved for pesticides (MSHA/NIOSH approval number prefix TC-14G), or a NIOSH approved respirator with an organic vapor (OV) cartridge or canister with any R, P, or HE prefilter. Wear coveralls with long-sleeved shirt and long pants, socks and chemical resistant footwear, goggles or face shield, and chemical-resistant gloves (such as barrier laminate, butyl rubber, nitrile rubber, neoprene rubber, polyvinyl chloride, viton, selection category C). Handlers participating in hand-dip applications; including introduction of material to and removal from the dip, and handling materials still wet from the dip; must wear: chemical-resistant full-front aprons with attached full-sleeve gloves. Follow manufacturer's instructions for cleaning/maintaining PPE. If no such instructions for washables, use detergent and hot water. Keep and wash PPE separately from other laundry. Discard clothing or other absorbent materials that have been drenched or heavily contaminated with this product's concentrate. Do not reuse them. For cleaning equipment: Add a chemical-resistant apron. User must wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet. If pesticide gets inside clothing, remove clothing immediately, wash thoroughly and put on clean clothing. Users must remove PPE immediately after handling this product. Wash the outside of gloves before removing. As soon as possible, wash thoroughly and change into clean clothing. Remove contaminated clothing and wash clothing before reuse.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. For terrestrial uses, do not apply directly to water, or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA. **PHYSICAL AND CHEMICAL HAZARDS:** Combustible. Do not use or store near heat or open flames.

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.


NOTE TO USER: Do not apply this product in a way that will contact workers or other persons.

10.0%
10.0%
80.0%
100.0%

SAPSTAIN AND MOLD CONTROL: BUSAN 1223 is used to control sapstain and mold on freshly cut hardwood and softwood lumber, logs, poles, posts and timbers. It is applied by dipping the wood until complete surface wetting is accomplished. Use 0.5 to 2.0 gallons of BUSAN 1223/100 gallons water (5 to 18 lbs of BUSAN 1223/100 gallons water) and agitate vigorously until BUSAN 1223 is thoroughly dispersed. Rates to be used will vary according to temperature, humidity, wood moisture, storage conditions, etc. Under conditions suitable for aggressive mold growth, the high rate mentioned above should be used. Treatment should be made as quickly as possible after lumber is cut and always within 24 hours after cutting.

CHILDREN GRO

or 15-20 minutes. Then continue rinsing eye. Get medical advice.
0 minutes. Get medical advice.
Get medical advice.
Control center or doctor.
Give artificial respiration, preferably by mouth-to-mouth device.
Call a Poison Control Center or 278-0330 or 1-800-BUCKMAN
Use of gastric lavage. This product contains petroleum distillate.

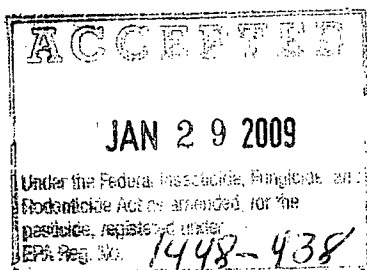

Warnings

TOXIC ANIMALS

May be fatal if swallowed or inhaled. Do not use frequently repeated skin contact may cause irritation. On prolonged exposures, wear either a respirator with a MSHA/NIOSH approval number prefix TC-14G, or a NIOSH approved any R, P, or HE prefilter. Wear coveralls, footwear, goggles or face shield, and gloves, neoprene rubber, polyvinyl chloride, including introduction of material to and cleaning/maintaining PPE. If no such PPE is available, wash PPE separately from other laundry. If heavily contaminated with this product's chemical-resistant apron. User must wash in toilet. If pesticide gets inside clothing, Users must remove PPE immediately. As soon as possible, wash thoroughly and wash clothing before reuse. Do not use. Do not apply directly to water, or near high water mark. Do not discharge into streams or other waters unless in accordance with NPDES permit and the permitting authority. For guidance contact your State Health Department.

HAZARDS: Combustible. Do not use or

Do not
by stor
PESTICIDE
to extir
more
should
areas
should
dispos
sawdu
sanitar
when n
PESTICIDE
waste
Improp
spray n
Federa
dispos
instru
Pestic
Agenc
repres
Office
CONTAMINATION
equiva
recond
of in a
or, if
author
out of s
Manufacture
Buckman
(901)
EPA ES
EPA Re
Product
Health
Last F

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.


NOTE TO USER: Do not apply this product in a way that will contact workers or other persons.

SAPSTAIN AND MOLD CONTROL: BUSAN 1223 is used to control sapstain and mold on freshly cut hardwood and softwood lumber, logs, poles, posts and timbers. It is applied by dipping the wood until complete surface wetting is accomplished. Use 0.5 to 2.0 gallons of BUSAN 1223/100 gallons water (5 to 18 lbs of BUSAN 1223/100 gallons water) and agitate vigorously until BUSAN 1223 is thoroughly dispersed. Rates to be used will vary according to temperature, humidity, wood moisture, storage conditions, etc. Under conditions suitable for aggressive mold growth, the high rate mentioned above should be used. Treatment should be made as quickly as possible after lumber is cut and always within 24 hours after cutting.

10.0%
10.0%
80.0%
100.0%

CHILDREN GRO

or 15-20 minutes. ites, then continue rinsing eye. ant advice.
0 minutes. advice. nt advice.
ontrol center or doctor.
ive artificial respiration, preferably by dvice.
ng a Poison Control Center or 278-0330 or 1-800-BUCKMAN
se use of gastric lavage. This ontains petroleum distillate.

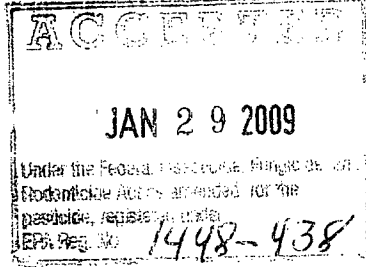

ments STIC ANIMALS

be fatal if swallowed or inhaled. Do not
frequently repeated skin contact may
exposures, wear either a respirator with
s (MSHA/NIOSH approval number prefix
il number prefix TC-14G), or a NIOSH
any R, P, or HE prefilter. Wear coveralls
footwear, goggles or face shield, and
ber, neoprene rubber, polyvinyl chloride,
; including introduction of material to and
ear: chemical-resistant full-front aprons
cleaning/maintaining PPE. If no such
sh PPE separately from other laundry.
heavily contaminated with this product's
nical-resistant apron. User must wash
toilet. If pesticide gets inside clothing,
Users must remove PPE immediately
As soon as possible, wash thoroughly
and wash clothing before reuse.
al uses, do not apply directly to water, or
lean high water mark. Do not discharge
ns or other waters unless in accordance
em (NPDES) permit and the permitting
effluent containing this product to sewer
thority. For guidance contact your State
HAZARDS: Combustible. Do not use or

Do not
by stor
PESTIC
to extir
more
should
areas
should
dispos
sawdu
sanitar
when n
PESTIC
waste
Improp
spray n
Federa
dispos
instru
Pestic
Agenc
 repres
Office
CONT
equiva
recond
of in a
or, if
authori
out of s

Manufact
Buc
(901)
EPA Es
EPA Re
Product

Health
Last F