



**MOORWOOD**

semi-transparent

**stain**

**& Wood**

**preservative**

natural redwood

081-23


1 GALLON 3.785 LITERS

**REPELS WATER**  
Meets Federal Specification T-117201, Part 3.7

**Benjamin Moore & Co.**



ASB-1A-WE 1981

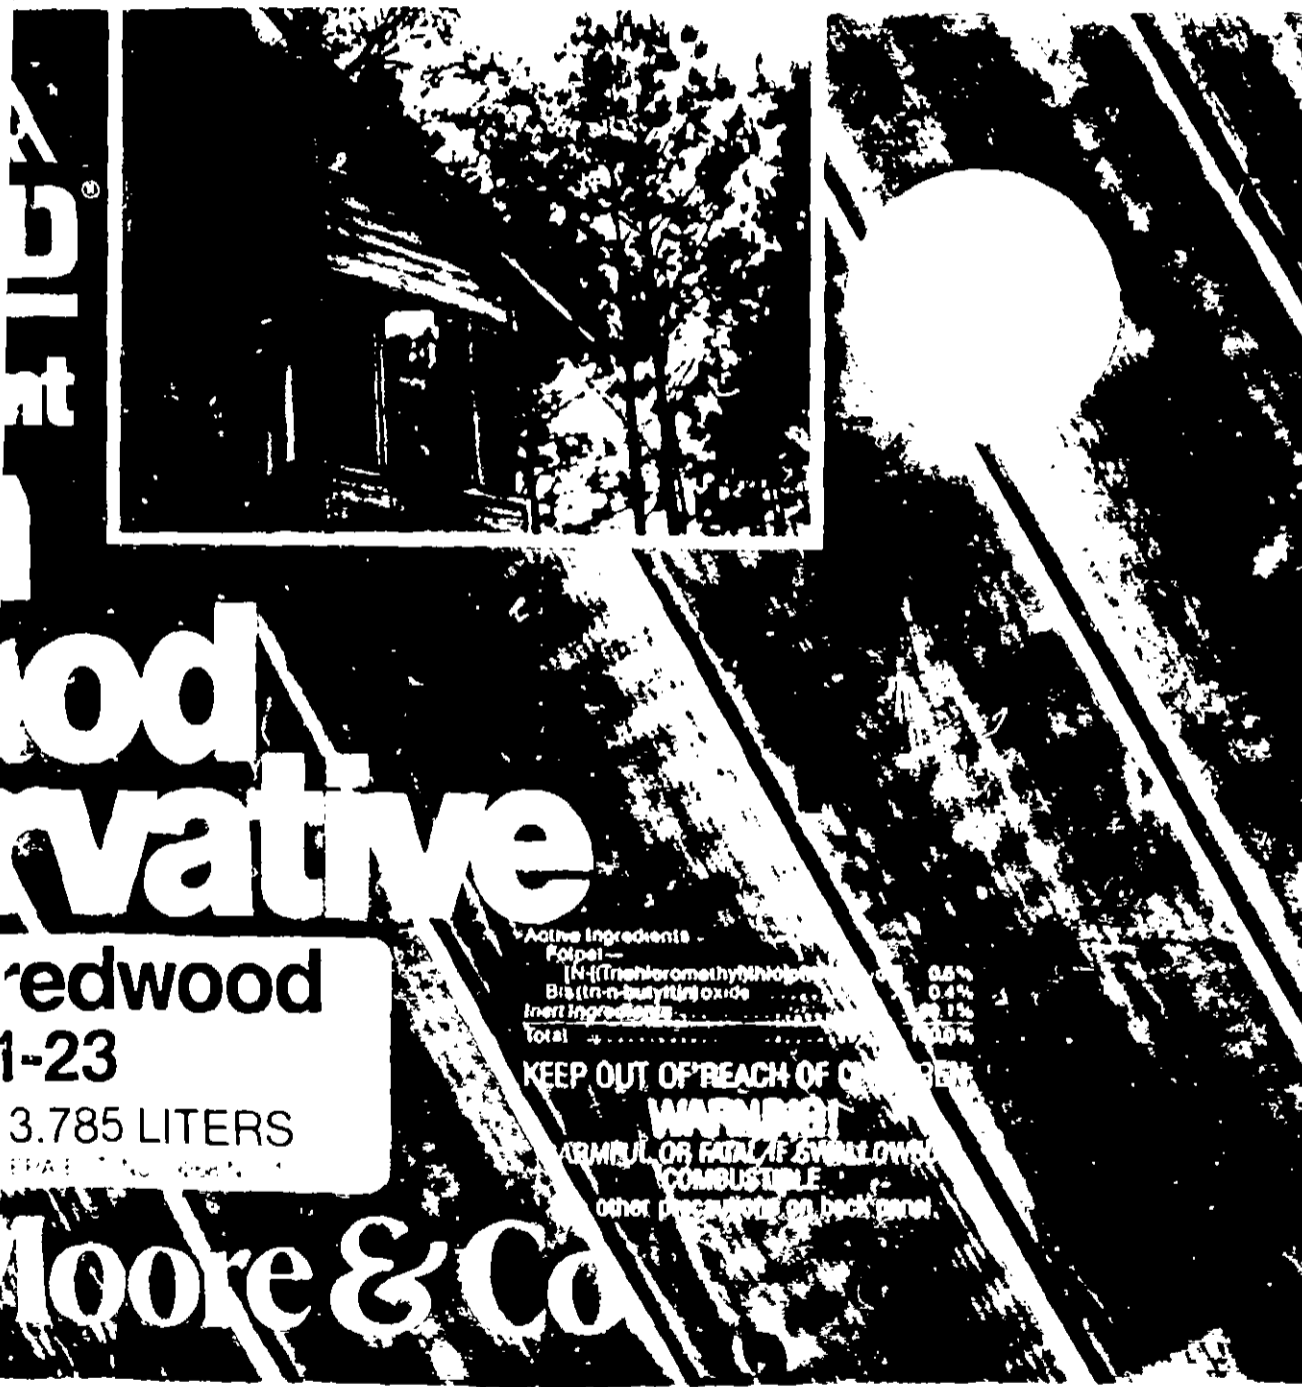

MOORWOOD®

# Wood Preservative

Redwood  
1-23  
3.785 LITERS

Moore & Co.

Active Ingredients - Folpet -	0.6%
[N-(Trichloromethyl)N-hydroxy- Bis(trimethylsilyl)oxide	0.4%
Inert Ingredients	99%
Total	100%

**KEEP OUT OF REACH OF CHILDREN**  
**WARNING!**  
**IRRITANT OR FATAL IF SWALLOWED**  
**COMBUSTIBLE**  
Other precautions on back panel

## MOORWOOD SEMI-TRANSPARENT STAIN AND WOOD PRESERVATIVE

**For Exterior Use On:**  
Shakes, Shingles, Saw Textured Lumber, Siding, Decking

MOORWOOD Semi-Transparent Stain is especially formulated to penetrate, protect and beautify exterior wood. Added life and durability are given to the finish by color permanent pigments ground in a weather tested vehicle. MOORWOOD Semi-Transparent Stain includes a preservative to protect against wood rot. It provides a wide range of colors that are semi-transparent, allowing the grain of the wood to show through. This stain can be used over previously finished wood that has weathered. MOORWOOD Semi-Transparent Stain is a penetrating coating with a clear finish. Specific instructions are recommended for use on weathered or abraded surfaces.

### DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER NOT INTENDED BY THE MANUFACTURER.

All surfaces must be clean, dry and free from dirt. Stir Semi-Transparent Stain thoroughly before and occasionally during use. Apply uniformly by brush, spray, roller or by dipping. This stain should be used as received in the can—no thinning is necessary. Always keep a wet edge to avoid lapping. To avoid color drift, follow this good painting tip—when three

MOORWOOD is a registered trademark of BENJAMIN MOORE & COMPANY.

### PRECAUTIONARY STATEMENTS

**HAZARDS TO HUMANS AND DOMESTIC ANIMALS:** KEEP OUT OF REACH OF CHILDREN.  
**WARNING!** CONTAINS PETROLEUM DISTILLATES. Avoid contact with skin. Close container after each use. **Use only with adequate ventilation.**  
**FIRST AID:** If swallowed, do not induce vomiting. CALL A PHYSICIAN.  
**ENVIRONMENTAL HAZARDS:** This product is toxic to fish and aquatic life. Do not contaminate water by cleaning of equipment or disposal.  
**PHYSICAL OR CHEMICAL HAZARDS:** Do not use, pour, spill or breathe vapors.

**DISPOSAL:** DO NOT REUSE EMPTY CONTAINER. WRAP CONTAINER AND PUT IN TRASH COLLECTION.

**MOORWOOD SEMI-TRANSPARENT STAIN AND WC PRESERVATIVE Guards Against Mildew**

**For Exterior Use On:**

**Shakes, Shingles, Saw Textured Lumber, Siding, Decks, Fencing, Rafters & Beams.**

MOORWOOD Semi-Transparent Stain is especially formulated to penetrate, protect and beautify exterior wood. Added life and durability are given to the finish by color permanent pigments ground in a weather-tested vehicle. MOORWOOD Semi-Transparent Stain includes a preservative to protect against wood rot. It provides a wide range of colors that are semi-transparent, allowing the grain of the wood to

show through. Can be used on new wood or on previously stained wood of similar color which has weathered and is porous. MOORWOOD Semi-Transparent Stain is a water-repellant coating which passes requirements of Federal Specification TT-W-572b par. 3.7. Not recommended for use on previously painted surfaces, abraded or brushed plywood.

**DIRECTIONS FOR USE**

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING

All surfaces must be clean, dry and free from dirt. Stir Semi-Transparent Stain thoroughly before and occasionally during use. Apply uniformly by brush, spray, roller or by dipping. This stain should be used as received in the can—no thinning is necessary. Always keep a wet edge to avoid lapping. To avoid color drift, follow this good painting tip—when three

quarters of can is used, re-fill from a fresh can. Coverage rate for Semi-Transparent Stain will vary widely, depending on the porosity and texture of the wood. A second coat can be applied, if necessary, after a 24-hour dry. Colors can be modified by the addition of up to 1/4 pint of Universal Tinting Colors per gallon.

MOORWOOD is a registered trademark of BENJAMIN MOORE & CO. MONTVALE, N.J. 07645

**PRECAUTIONARY STATEMENTS**

**HAZARDS TO HUMANS AND DOMESTIC ANIMALS: KEEP OUT OF REACH OF CHILDREN**

**WARNING!** CONTAINS PETROLEUM DISTILLATES. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. **Use only with adequate ventilation.**

**FIRST AID:** If swallowed, do not induce vomiting. CALL A PHYSICIAN IMMEDIATELY.

**ENVIRONMENTAL HAZARDS:** This product is toxic to fish. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of wastes.

**PHYSICAL OR CHEMICAL HAZARDS:** Do not use, pour, spill or store near heat or open flame.

**DISPOSAL: DO NOT REUSE EMPTY CONTAINER  
WRAP CONTAINER AND PUT IN TRASH COLLECTION**