A combination fortified synthetic detergent and disinfectant with three phase action—Cleans, Disinfects, and Deodorizes in one easy operation. Dissolves all ordinary soils and soap deposits and leaves surfaces antiseptically clean.

WARNING:

May cause skin and eye damage. Do not get in eyes, on skin or clothing. Harmful if swallowed. Avoid contamination of food.

FIRST AID:

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, get medical attention. Remove and wash contaminated clothing before reuse.

South San Francisco, California

CLEAN-CO 25

Phenol Coefficient (A.O.A.C. Method, 20° C)

S. Typhosa 20 Staphylococcus Aureus 30

ACTIVE INGREDIENTS

6.20%

n-Alkyl (C₁₄ - 50%, C₁₂ - 40%, C₁₆ - 10%) dimethyl benzyl ammonium chloride, Sodium carbonate, Tetrasodium Salt of ethylenediamine Tetraacetic acid.

INERT INGREDIENTS

98.80%

Water nonylphenoxy ployethoxy ethanol and essential oils.

WARNING:

KEEP OUT OF REACH OF CHILDREN
See Left Side Panel For Additional Warnings

NET CONTENTS: ONE GALLON

NET CONTENTS:

GALLONS

U.S.D.A. Reg. No. 1622-47



KLIX Chemical Company, Inc.

CLEAN-CO 25

Phenol Coefficient (A.O.A.C. Method, 20° C)

S. Typhosa 20 Staphylococcus Aureus 30

ACTIVE INGREDIENTS

6.20%

n-Alkyl (C₁₄ - 50%, C₁₂ - 40%, C₁₆ - 10%) dimethyl benzyl ammonium chloride, Sodium carbonate, Tetrasodium Salt of ethylenediamine Tetraacetic acid.

INERT INGREDIENTS

98.80%

Water nonylphenoxy ployethoxy ethanol and essential oils.

WARNING:


KEEP OUT OF REACH OF CHILDREN
See Left Side Panel For Additional Warnings

NET CONTENTS: ONE GALLON

NET CONTENTS:

GALLONS

U.S.D.A. Reg. No. 1622-47

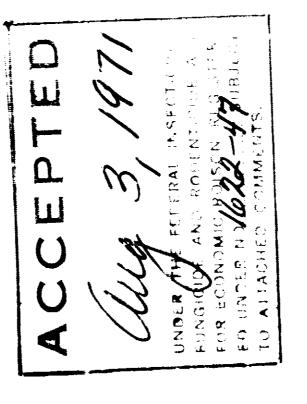

Recommended For:

Floors, Walls, Restrooms, Showers, Garbage Cans, Diaper Pails and any other surface or equipment where cleaning, Disinfecting and Deodorizing is necessary for proper maintenance.

DIRECTIONS:

Remove excess contamination prior to the recommended use solutions. Apply solutions with a mop, brush, or rag, thoroughly wet all surfaces.

For general cleaning of hard surfaces use 2 ounces per gallon of water.

For heavy duty cleaning of porous surfaces use 4 ounces per gallon of water.

938

KLIX Chemical Company, Inc.

Portland, Oregon · Los Angeles, California