

PRECAUTIONARY STATEMENTS

HAZARD TO HUMANS AND DOMESTIC ANIMALS

CAUTION

Harmful if swallowed. Wash thoroughly after handling. Avoid contamination of food and feed.

Do not leave container where children or animals may gain access.

ENVIRONMENTAL HAZARDS

TIM-BOR or TIM-BOR solutions carelessly spilled or applied to cropland or growing plants - including trees and shrubs - may kill or seriously retard plant growth. Do not contaminate water by cleaning of equipment or disposal of wastes.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

1. PROHIBITIONS:

Do not contaminate water, food or feed by storage or disposal.
Do not store where children or animals may gain access.
Open burning and dumping prohibited.
Do not reuse empty container.

2. PESTICIDE DISPOSAL:

Pesticide, spray mixture or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or Local disposal authorities.

3. CONTAINER DISPOSAL:

Consult federal, state or local disposal authorities for approved procedures.


**20 MULE TEAM®
TIM-BOR®**

**FOR
PROTECTION OF LUMBER AGAINST
FUNGAL DECAY AND WOOD DESTROYING INSECTS
OTHER THAN TERMITES**

ACTIVE INGREDIENTS:

Disodium Octaborate Tetrahydrates 98%
 $(Na_2B_8O_{13} \cdot 4H_2O)$
(Boron equivalent 20.5%)

INERT INGREDIENT 2%



TIM-BOR is an inorganic borate salt for the protection of lumber against fungal decay and wood destroying insects including:

- Powder Post Borer - *Lyctus brunneus*
- Common House Borer - *Anobium punctatum*
- Common Furniture Beetle - *Anobium punctatum*
- Two Tooth Longhorn - *Ambiodontus tristis*
- House Longhorn Beetle - *Hyrtrupes bajulus*

TIM-BOR is not recommended for protection against termites.

TIM-BOR is not recommended for use in treating lumber which will have contact with the soil or be exposed to leaching by weather.

TREATING CONDITIONS

Solution lbs. TIM-BOR per U.S. gal.	Solution Temperature	Diffusion Period	Lumber Thickness
1.93	115 F 46 C	2-4 wks	1 inch
3.83	135 F 57 C	6-10 wks	3 inches

Dip freshly sawn green lumber 4 to 5 times in a hot aqueous solution of TIM-BOR. After dipping, the lumber should be close-stacked and covered to prevent drying. Drying conditions will prevent diffusion from taking place. Diffusion of the TIM-BOR into the interior of wood will start immediately and will require from 4 to 10 weeks to thoroughly penetrate the lumber, depending on the thickness of the lumber.

NOTICE

TIM-BOR is capable of destroying plant life and therefore should not be spilled or dumped into areas underlain with roots of valuable vegetation.

Because of many varying conditions affecting use and application, manufacturer warns buyer that these may impair or vary the results or effects of the use of this product. In any event, complete prevention of decay by fungi or other organisms is not guaranteed. Neither manufacturer nor seller shall be liable in respect to any injury or damage suffered by reason of the use of this product for a purpose not indicated by the label or when used contrary to the directions or instructions hereon nor with respect to breach of any warranty not expressly specified herein. Buyer accepts this material subject to these terms, and assumes all risk of usage and handling except when used or handled in accordance with this label. Neither manufacturer nor seller, makes, and their employees and agents are not permitted to make, any representations or warranties, express or implied by law, not specifically set forth herein.

KEEP OUT OF REACH OF CHILDREN

CAUTION

SEE SIDE PANEL OR ADDITIONAL PRECAUTIONARY STATEMENTS

A 20 MULE TEAM® Product




Manufactured by:
United States Borax & Chemical Corporation
Los Angeles, CA 90010

EPA Reg. No. 1624-39

EPA Est 1624-CA-1

Net Weight: 50 LBS. (22.68 KG.)

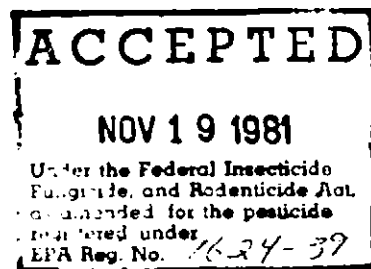

0272/0881(02)

© 1981 U.S.B. & C.C.

• Trademark of United States Borax & Chemical Corporation