

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND
DOMESTIC ANIMALS**

DANGER:

**CORROSIVE. CAUSES EYE DAMAGE
AND SKIN BURNS. MAY CAUSE
ALLERGIC SKIN REACTION. MAY BE
HARMFUL IF INHALED. MAY BE
FATAL IF SWALLOWED OR ABSORBED
THROUGH THE SKIN.**

Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Avoid breathing vapor or mist. Avoid contamination of feed. Do not take internally. Wash thoroughly after handling.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and wildlife. Do not discharge into lakes, streams, ponds or public waters unless in accordance with an NPDES permit. For guidance, contact your Regional Office of the EPA. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this pesticide only as specified on this label.

STORAGE AND DISPOSAL


STORAGE: Do not contaminate water, food, or feed by storage or disposal. Open dumping is prohibited.

DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

Metal Containers: Triple rinse(or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

Plastic Containers: Do not reuse empty container. Triple rinse(or equivalent). Then puncture and dispose of in a sanitary landfill, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

DOT-EXEMPTION 1.8247

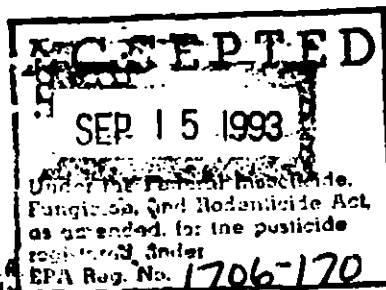

Container made in U.S.A.
Contents made in Canada

14. 1220/0793

BEST AVAILABLE COPY

NALCO®

**NALCON®
7678**

PAPERMILL SLINICIDE

ACTIVE INGREDIENTS:

5-Chloro-2-methyl-4-isothiazolin-3-one.....	3.11%
2-Methyl-4-isothiazolin-3-one.....	0.94%
INERT INGREDIENTS.....	95.95%
Total.....	100.00%

KEEP OUT OF REACH OF CHILDREN

DANGER:

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Do not induce vomiting. Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately. Never give anything by mouth to an unconscious person.

IF INHALED: Remove immediately to fresh air. If not breathing, apply artificial respiration. If breathing is difficult, give oxygen and call physician.

IF ON SKIN: Wash thoroughly with soap and water. Remove and wash contaminated clothing before reuse.

IF IN EYES: Flush with plenty of water for at least 15 minutes. Call a physician.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsions may be needed.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

NALCO CHEMICAL COMPANY

6216 WEST 66TH PLACE

CHICAGO, IL 60638

EMERGENCY TELEPHONE NUMBER

(800) 462-5378

DIRECTIONS FOR USE: Page 171
GENERAL CLASSIFICATION

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

PAPERMILL WATERS

NALCON 7678 is recommended for the control of bacterial and fungal slime in the production of paper.

POINT OF ADDITION: NALCON 7678 should be added to a point in the system to insure uniform mixing such as the Beater, Hydropulper, or Fan or Broke Storage Pumps.

DOSAGE: Apply 0.17 - 0.56 lbs. (2.6 - 8.6 fluid oz.) of NALCON 7678 per ton (dry basis) of pulp or paper produced as a slug dose. If needed repeat daily. Badly fouled systems should be cleaned before initial treatment.

POLYMER LATEX PRESERVATION

NALCON 7678 is recommended for the control of bacteria and fungi in the manufacture and storage of synthetic and natural polymer latices including: acrylic; styrene/butadiene; carboxylated styrene/butadiene; ethylene/vinyl acetate; and biopolymers intended for industrial use, such as xanthan gum, gum arabic, guar gum, protein-derived polymers, starches, and casein-derived polymers.

Add 0.16 - 1.22 lbs. of NALCON 7678 (72 g - 0.56 kg) to each 1,000 lbs. (453.6 Kg) of emulsion to provide 157 to 1240 ppm product (6.25 - 50 ppm active isothiazolones).

NOTE: To insure uniform mixing, add NALCON 7678 to latex or solutions slowly with agitation. The actual concentrations required will depend upon such factors as the specific substance to be treated, frequency of repeated microbial contamination expected, and level of protection required.

COATING PRESERVATION

NALCON 7678 is recommended as an in-container preservative for the control of bacteria and fungi in water-based coatings such as paper coatings.

Add 0.16 - 0.61 lbs of NALCON 7678 (72 - 278 g) to each 1,000 lbs. (453 kg) of fluid to provide 157 - 620 ppm product (6.25 to 25 ppm active isothiazolones).

DISPERSED PIGMENT PRESERVATION

NALCON 7678 is recommended for the control of bacteria and fungi in the manufacture and storage of dispersed pigments such as kaolin clay, montmorillonite clay, titanium dioxide, calcium carbonate, calcium sulfate, barium sulfate, magnesium silicate, and kieselguhr used in paper production.

Add 0.16 - 0.61 lbs. of NALCON 7678 (72 - 278 g) to each 1,000 lbs. (453 kg) of fluid to provide 157 - 620 ppm product (6.25 - 25 ppm active isothiazolones).

EPA Reg. No. 1706-170
EPA Est. No. 1706-LA-1 (C)
EPA Est. No. 1706-CA-1 (B)

Letter in () that matches first letter in batch number identifies the establishment number.

CORROSIVE LIQUID, n. o. s., 8, UN1760, III (5-chloro-2-methyl-4-isothiazolin-3-one)

181