

1706-195

11/18/2009

1/2



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON D.C., 20460

OFFICE OF
PREVENTION, PESTICIDES AND
TOXIC SUBSTANCES

Steptoe & Johnson
c/o for Nalco Company
1330 Connecticut Avenue, NW
Washington, DC 20036-1795

NOV 18 2009

Attention: Juli Mann
Paralegal Specialist

Subject: Nalcon 7616
EPA Reg. No. 1706-195
Amendment Dated August 20, 2009

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. The Agency has no objection to revising the container disposal language and updating the establishment and company identification numbers on your label. A stamped label is enclosed for your records.

If you have any questions concerning this letter, please contact Demson Fuller at (703) 308-8062.

Sincerely,

A handwritten signature in black ink, appearing to read "M. Swindell".

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510C)

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING! May be fatal if swallowed. May cause irritation of skin and eyes. May cause skin sensitization. Avoid contact with skin, eyes and clothing. Avoid breathing dust. Gloves must be worn when handling the product. Wash thoroughly after handling.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and aquatic invertebrates. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND DISPOSAL

PROHIBITIONS: Do not contaminate water, food, or feed by storage or disposal. Keep container tightly closed.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State pesticide or environmental control agency, or the hazardous waste representative at the nearest EPA regional office for guidance.

CONTAINER DISPOSAL: Non-refillable container. Do not reuse or refill this container. Offer for recycling, if available. Completely empty bag into application equipment. Then dispose of empty bag in a sanitary landfill or by incineration, or, if allowed by State and Local authorities, by burning. If burned, stay out of smoke.

Net contents shown elsewhere on container



NALCON 7616

Inhibits and controls growth of slime-forming bacteria and fungi in pulp and paper mills. Preservative for coatings, clay slurries, adhesives, glues, latex emulsions, casein and titanium dioxide slurries. Preserves aqueous systems.

ACTIVE INGREDIENT:

Tetrahydro-3, 5-dimethyl 2H-1, 3,5-thiadiazine-2-thione.....	98.0 %
INERT INGREDIENTS.....	2.0 %
Total.....	100.00%

KEEP OUT OF REACH OF CHILDREN WARNING

FIRST AID

- IF IN EYES: Hold eyes open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a poison control center or doctor for treatment advice.
- IF SWALLOWED: Call a poison control center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told by a poison control center or doctor.
- IF ON SKIN: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.
- IF INHALED: Move person to fresh air. If person is not breathing, call 911 or ambulances, then give artificial respiration, preferably mouth-to-mouth, if possible. Call a poison control center or doctor for treatment advice.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed. Have the MSDS with you when calling a poison control center or a doctor, or going for treatment.

EPA Reg. No. 1706-195

EPA Est. No. 33967-NJ-1

Nalco Company
1601 West Diehl Road
Naperville, IL 60563-1198
EMERGENCY PHONE NO.: (800) 424-9300

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

NALCON 7616 should be added to the end-use product at a point in the processing where there is sufficient agitation and time to achieve good dispersion.

FOR PRESERVATION OF SLURRIES AND HIGH VISCOSITY SUSPENSIONS (COATINGS, CLAY SLURRIES, GLUES, ADHESIVES)


Test data show that NALCON 7616 is effective at use levels of 0.04 - 0.1% by weight based on the total formulation. The exact amount will depend on the components, storage time and temperature, etc. Actual use levels should be determined by a test of the system.

For preservation of slurries and high viscosity suspensions, the material should be added at a point in the processing where there will be sufficient time and agitation for good dispersion.

FOR BACTERIAL AND FUNGAL SLIME CONTROL IN PULP AND PAPER MILL SYSTEMS

Test data show that NALCON 7616 in concentrations of 10-50 ppm will inhibit the growth of slime-forming bacteria and fungi in pulp and paper mill systems. NALCON 7616 should be added to the stock system at a point where there will be good agitation and time for dispersion at a rate of 0.083 - 0.415 lb/1000 gal of treated water. Actual use levels should be determined by a test of the system. Each mill system varies considerably as to the amount of NALCON 7616 required. Under severe conditions, doses approaching 50 ppm are required. Under less severe conditions, lower dosages approaching 10 ppm should be used. Your Nalco representative can offer technical assistance in solving in-plant slime control problems.

For slime control, NALCON 7616 should be added at the beaters or as far back in the system as possible to allow time for dispersion. The material is packaged in pre-measured water-soluble plastic bags for accurate additions and ease in handling.

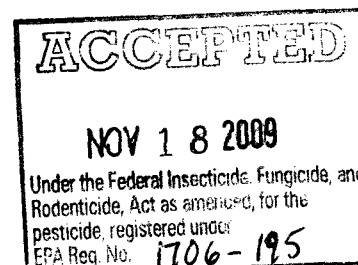

N/N