

PRECAUTIONARY STATEMENTS: HAZARDS TO HUMANS
AND DOMESTIC ANIMALS

DANGER: CORROSIVE. MAY CAUSE SEVERE SKIN
IRRITATION OR CHEMICAL BURNS TO BROKEN SKIN.
CAUSES EYE DAMAGE.

Do not get in eyes, on skin or on clothing. Wear goggles or face shield and
rubber gloves (PVC or Nitrile) when handling this product. Wash after
handling. Avoid breathing vapors. Vacate poorly ventilated areas as soon as
possible. Do not return until odors have dissipated.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and aquatic organisms. Do not discharge effluent
containing this product into lakes, streams, ponds, estuaries, oceans, or other
waters unless in accordance with the requirements of a National Pollutant
Discharge Elimination System (NPDES) permit and the permitting authority has
been notified in writing prior to discharge. Do not discharge effluent containing
this product to sewer systems without previously notifying the local sewage
treatment plant authority. For guidance, contact your State Water Board or
Regional Office of the EPA.

PHYSICAL AND CHEMICAL HAZARDS

STRONG OXIDIZING AGENT: Mix only with water according to label
directions. Mixing this product with gross filth such as feces, urine, etc., or
with ammonia, acids, detergents or other chemicals will release hazardous gases
irritating to eyes, lungs and mucous membranes.

STORAGE AND DISPOSAL

Store in a cool, dry area away from direct sunlight. In case of a spill, flood area
with large quantities of water. Rinse empty container thoroughly with water
and either return empty container thoroughly with water and either return empty
container to manufacturer or bury in an approved landfill. Product or rinsate
that cannot be used should be diluted with water and disposed of in a sanitary
sewer. Wastes resulting from the use of this product may be disposed of on site
or at an approved waste disposal facility. Do not contaminate water, food, or
feed by storage, or disposal.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with
its labeling.

NOTE: This product degrades with age. Use a chlorine test kit and increase
dosage as necessary to obtain the required level of available chlorine.

For the control bacteria, algae and fungi, add this sodium hypochlorite solution
to tower basin, distribution box or some other point in the system to insure
uniform mixing.

DIRECTIONS FOR USE CONTINUED ON RIGHT SIDE PANEL

NET CONTENTS SHOWN ELSEWHERE ON CONTAINER



Nalco 7341

A MICROORGANISM CONTROL CHEMICAL

ACTIVE INGREDIENT:

Sodium hypochlorite.....12.5%
INERT INGREDIENTS.....87.5%
TOTAL.....100.0%

EPA Registration No. 1706-20001

EPA Establishment No. 1744-NH-1, 00550-GA-001

KEEP OUT OF REACH OF CHILDREN DANGER

FIRST AID

- IF IN EYES: Hold eyes open and rinse slowly and gently with
water for 15-20 minutes. Remove contact lenses, if present, after
the first 5 minutes, then continue rinsing. Call a poison control
center or doctor for treatment advice.
- IF SWALLOWED: Call a poison control center or doctor
immediately for treatment advice. Have person sip a glass of
water if able to swallow. Do not induce vomiting unless told by
a poison control center or doctor.
- IF ON SKIN: Take off contaminated clothing. Rinse skin
immediately with plenty of water for 15-20 minutes. Call a
poison control center or doctor for treatment advice.
- IF INHALED: Move person to fresh air. If person is not
breathing, call 911 or ambulances, then give artificial
respiration, preferably mouth-to-mouth, if possible. Call a
poison control center or doctor for treatment advice.

NOTE TO PHYSICIAN: Probable mucosal damage may
contraindicate the use of gastric lavage. Measures against circulatory
shock, respiratory depression and convulsion may be needed. Have
the MSDS with you when calling a poison control center or a doctor,
or going for treatment.

SEE LEFT SIDE PANEL FOR ADDITIONAL PRECAUTIONARY
STATEMENTS.

ONDEO Nalco Company
Ondeo Nalco Center
Naperville, IL 60563-1198
EMERGENCY PHONE NO. (800) 424-9300

DIRECTIONS FOR USE (continued from left side panel):

COOLING TOWER, EVAPORATIVE CONDENSER WATER,
AND PULP AND PAPERMILL WATER SYSTEMS

A. SLUG FEED METHOD

Initial Dose: When the system is noticeably fouled, add appropriate amount of
NALCO 7341 per 10,000 gallons of water in the system to obtain from 5 to 10
ppm available chlorine. Repeat until control is achieved. Badly fouled systems
must be cleaned before treatment is begun.

Subsequent Dose: When microbial control is evident, add appropriate amount of
NALCO 7341 per 10,000 gallons of water in the system daily, or as needed to
maintain control and keep the chlorine residual at 1 ppm.

B. INTERMITTENT FEED METHOD

Initial Dose: When the system is noticeably fouled, add appropriate amount of
NALCO 7341 per 10,000 gallons of water in the system to obtain 5 to 10 ppm
available chlorine. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half
(or 1/3, 1/4, 1/5) of the water in the system has been lost by blowdown. Badly
fouled systems must be cleaned before treatment is begun.


Subsequent Dose: When microbial control is evident, add appropriate amount of
NALCO 7341 per 10,000 gallons of water in the system to obtain a 1 ppm
residual. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half (or 1/3,
1/4, 1/5) of the water in the system has been lost by blowdown.

C. CONTINUOUS FEED METHOD

Initial Dose: When the system is noticeably fouled, add appropriate amount of
NALCO 7341 per 10,000 gallons in the system to obtain 5 to 10 ppm available
chlorine. Badly fouled systems must be cleaned before treatment is begun.

Subsequent Dose: Maintain this treatment level by starting a continuous feed of
1 oz. of NALCO 7341 per 1,000 gallons of water lost by blowdown to maintain
a 1.0 ppm residual.

TREATMENT LEVEL CHART	
METHOD	Ounces NALCO 7341/10,000 Gallons Water
Slug Feed to obtain 5-10 ppm	52-104
Subsequent Dose to maintain 1 ppm residual	11
Intermittent Feed to obtain 5-10 ppm	52-104
Subsequent Dose to maintain 1 ppm residual	11
Continuous Feed to obtain 5-10 ppm	52-104
Subsequent Dose (per 1000 gallons) to maintain 1 ppm residual	1.0

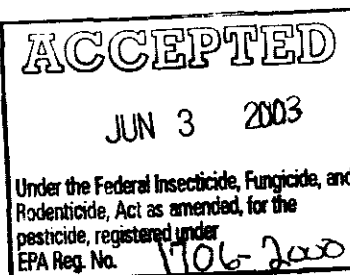

1706-20001

6-3-2003

SVEZ 11