

U.S. STANDARD



**MOBILE
PAINTS**

5 GAL. NET

Active Ingredients	
Cuprous Oxide	55.4%
Inert Ingredients	44.6%
Total	100.0%

XOXTT MIL-P-15931A

HAZARDOUS

DANGER!
TOXIC AND
FIRE HAZARD

CONTAINS

METHYL ISOBUTYL KETONE & XYLENE

AVOID INHALING, SWALLOWING OR CONTACT WITH THE SKIN.

AVOID SPARKS, OPEN FLAME AND SPILLS.

KEEP CONTAINER CLOSED.

Jack Tar

Marine Finishes

VINYL ANTI-FOULING
MIL-P-15931A FORMULA NO. 121

DANGER!

HARMFUL OR FATAL IF SWALLOWED
FLAMMABLE VAPOR HARMFUL


EYE IRRITANT
KEEP OUT OF REACH OF CHILDREN

See back panel for additional cautions

ACCEPTED

JAN 4, 1972

7-19-72

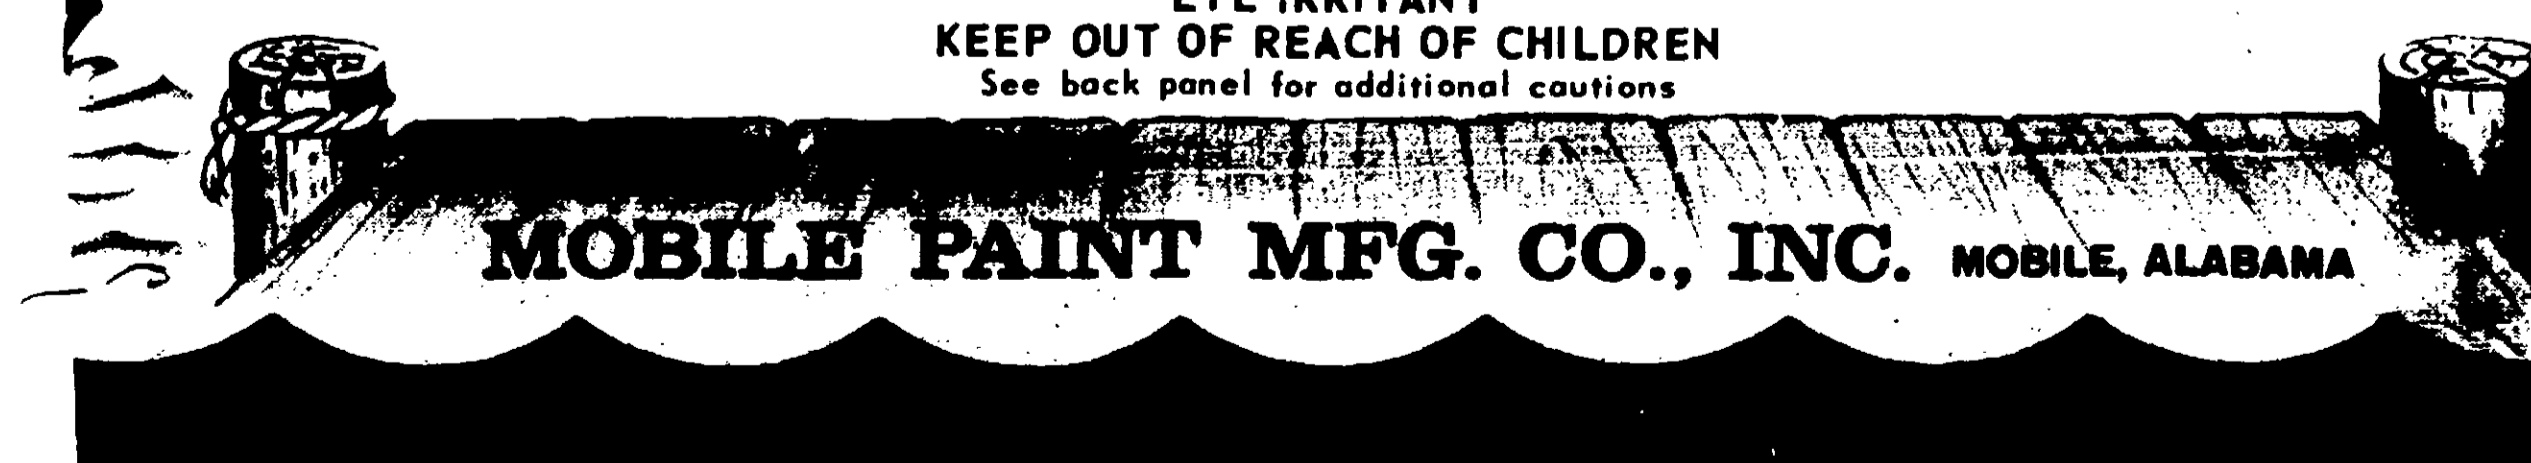

MOBILE PAINT MFG. CO., INC. MOBILE, ALABAMA

ACCEPTED

JAN 11, 1970

1719-910

Comment

This paint is intended for use on steel ship bottoms used in salt water to prevent fouling from barnacles and similar marine life.

The surface to be painted should be sandblasted and then given a coat of Wash Primer Specification MIL-P-15328B. Allow to dry 2 hours then apply four 1.5 Mil coats of Vinyl Red Lead Primer MIL-P-15929B or Vinyl-Zinc Chromate Primer MIL-P-15930B. This should be followed by two 2.0 Mil coats of Vinyl Anti-Fouling Mil-P-15931A.

Allow minimum of 4 hours dry time between all coats except Wash Primer and 4 hours after final coat of anti-fouling before launching. During conditions of high humidity or low temperature this dry time should be increased to a minimum of 8 hours.

If thinning is necessary use Vinyl Thinner or Methyl Isobutyl Ketone.

CONTAINS XYLOL AND METHYL ISOBUTYL KETONE

Avoid contact with eyes and breathing of vapor or spray mist. In case of contact with eyes, flood repeatedly with water. CALL PHYSICIAN IMMEDIATELY. Avoid prolonged contact with skin. Keep away from heat, sparks, and open flame. Contact with flame or hot surfaces may produce toxic gases. Do not transfer contents to unlabeled containers. Close container after each use. Do Not Take Internally.

Use with adequate ventilation.

KEEP OUT OF REACH OF CHILDREN

MIL-P-159-1A X100RW1 B

ACCEPTED WITH COMMENTS