

BLP MOBILE PAINTS

Active Ingredient	
Cuprous Oxide.....	68.6%
Inert Ingredients	31.4%
	100.0%



VINYL ANTI-FOULING
MIL-P-15931B
FORMULA NO. 121/62

CAUTION!

HARMFUL OR FATAL IF SWALLOWED. EYE IRRITANT.
KEEP CONTAINER AWAY FROM HEAT OR OPEN FLAME.
KEEP OUT OF REACH OF CHILDREN.

Anti-fouling paint for
protection from

the surface to
Fresh Primer S
Mil co
Primate Prim
Vinyl A

Allow minimum
and 4 hours d
ditions of hig
exposed to a

SPECIAL
spray (te
regular co
necess

CO
d
o
S
f
n
r
n



Jack Tar

Marine Finishes

**VINYL ANTI-FOULING
MIL-P-15931B**


**FORMULA NO. 121/63
MOBILE PAINT MFG. CO., INC.**

CAUTION!
HARMFUL OR FATAL IF SWALLOWED-EYE IRRITANT
WARNING! FLAMMABLE KEEP AWAY FROM HEAT OR OPEN FLAME
KEEP OUT OF REACH OF CHILDREN

See other cautions on back panel

MOBILE, ALABAMA

5 GAL. NET

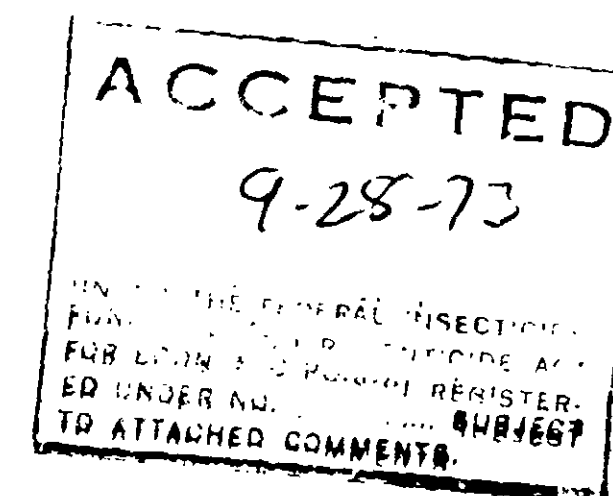

This paint is
protection fr


The surface t
Wash Primer S
four 1.5 Mil c
Chromate Prim
coats of Vinyl

Allow minim
and 4 hours
ditions of hi
creased to a

SPECIAL
spray (ne
regular c
is necess

CO
Avoi
of c
PHY
from
may
tain
Harm
perf
water

Use

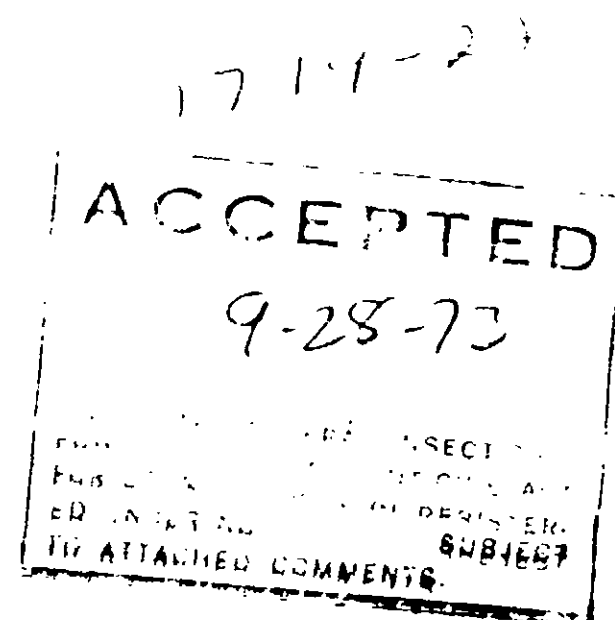

This paint is intended for use on steel ship bottoms used in salt water for protection from fouling from barnacles and similar marine life.

The surface to be painted should be sandblasted and then given a coat of Wash Primer Specification MIL-P-15328B. Allow to dry 2 hours then apply four 1.5 Mil coats of Vinyl Red Lead Primer MIL-P-15929B or Vinyl-Zinc Chromate Primer MIL-P-15930B. This should be followed by two 2.0 Mil coats of Vinyl Anti-Fouling MIL-P-15931B.

Allow minimum of 4 hours dry time between all coats except Wash Primer and 4 hours after final coat of anti-fouling before launching. During conditions of high humidity or low temperature this dry time should be increased to a minimum of 8 hours.

SPECIAL INSTRUCTIONS: Contents may be applied by hot spray (temperature not to exceed 120° F.) airless spray, or regular cold spray (Normally no thinning required.) Where thinning is necessary, use Methyl Isobutyl Ketone.

CAUTION!

CONTAINS XYLOL AND METHYL ISOBUTYL KETONE

Avoid contact with eyes and breathing of vapor or spray mist. In case of contact with eyes, flood repeatedly with clear water. CALL PHYSICIAN IMMEDIATELY. Avoid contact with skin. Keep away from heat, spark, and open flame. Contact with flame or hot surfaces may produce toxic gases. Do not transfer contents to unlabeled containers. Close container after each use. Do Not Take Internally. Harmful if swallowed. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place away from water supply.

Use with adequate ventilation.

KEEP OUT OF REACH OF CHILDREN

EPA REG. NO. 1719-22

NOXRIAGM MIL-P-15931B



5 GAL. NET