

**BLP MOBILE
PAINTS**

100.0%



Marine Finishes

**VINYL ANTI-FOULING BLACK
MIL-P-16189A FORMULA NO. 129**

CAUTION!


KEEP OUT OF REACH OF CHILDREN
HARMFUL OR FATAL IF SWALLOWED-EYE I
WARNING! FLAMMABLE KEEP AWAY FROM HEAT OR
See other cautions on back panel!

MOBILE PAINT MFG. CO. MOBILE, ALABAMA

ACCEPTED
Feb 7, 1974
UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON REGISTERED
ED UNDER NO. 1719-30



Jack Tar

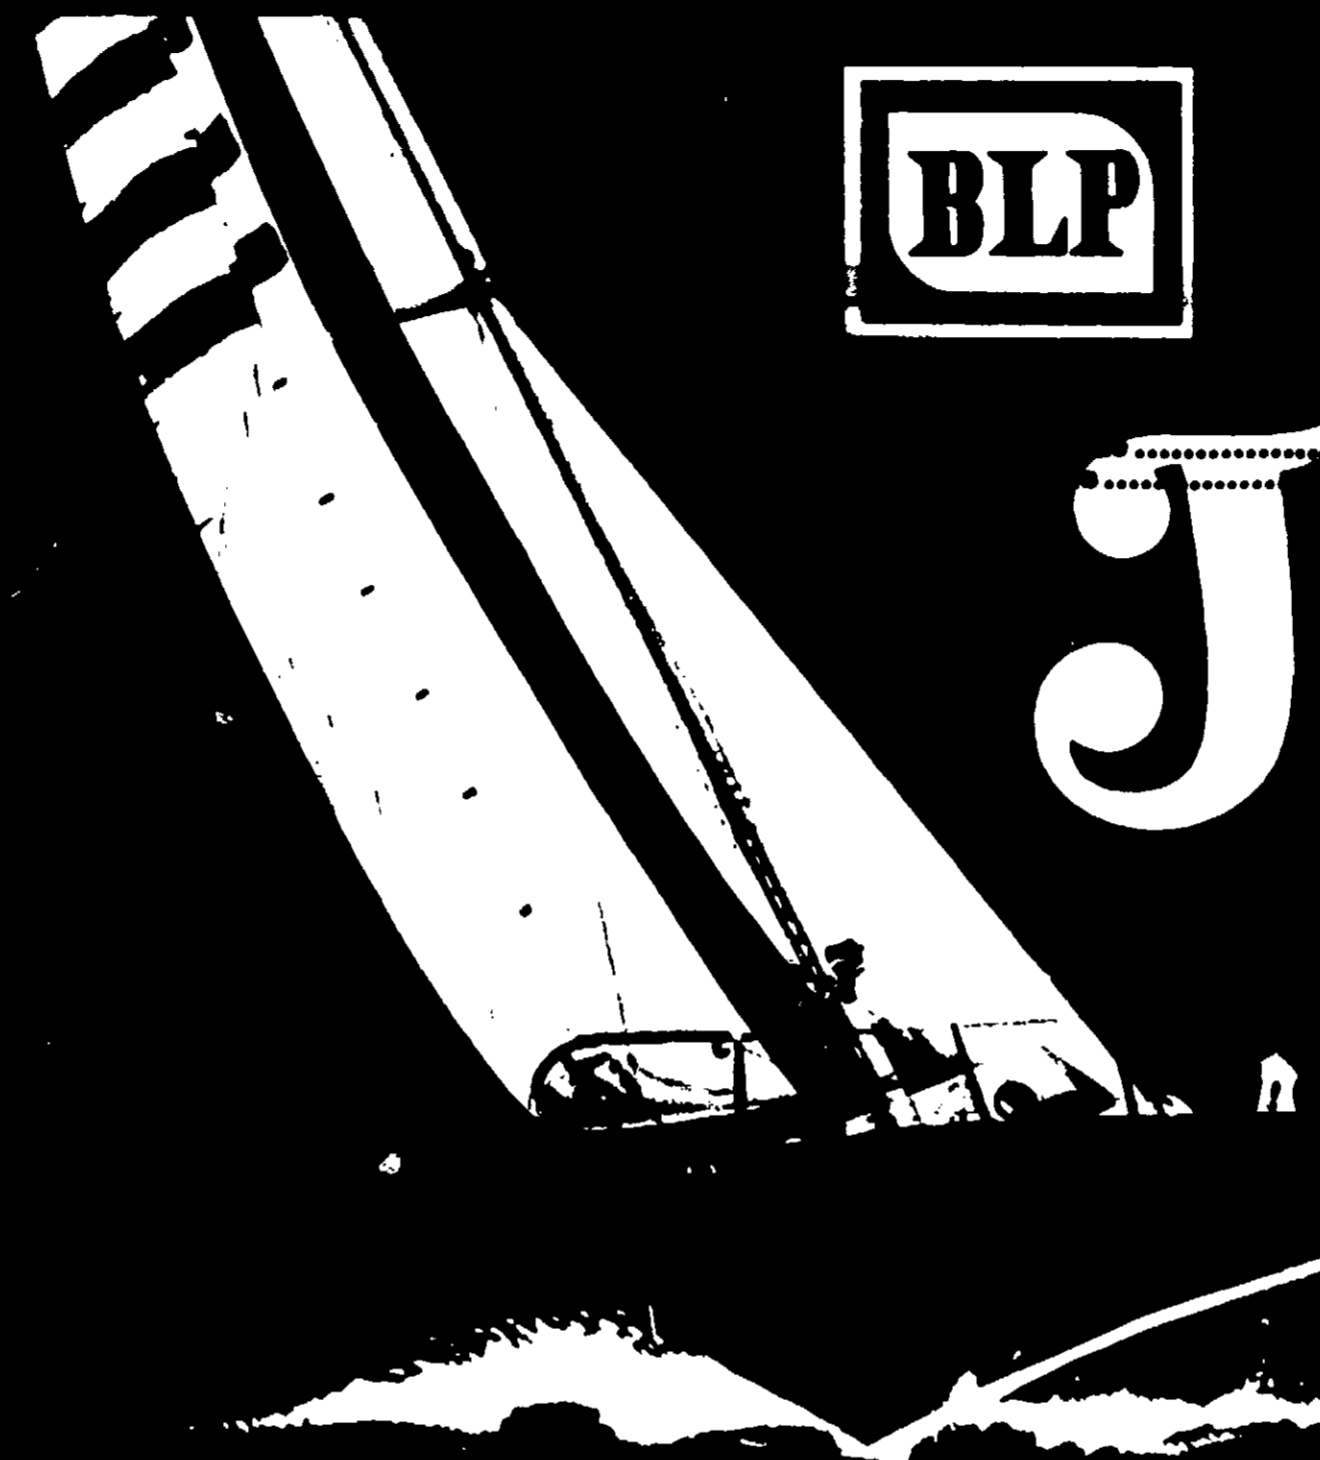

Marine Finishes

**VINYL ANTI-FOULING BLACK
MIL-P-16189A FORMULA NO. 129**

CAUTION!
KEEP OUT OF REACH OF CHILDREN
HARMFUL OR FATAL IF SWALLOWED-EYE I
WARNING! FLAMMABLE KEEP AWAY FROM HEAT OR
See other cautions on back panel

MOBIL : PAINT MFG. CO INC. MOBILE, ALABAMA

This paint is intended for use on steel ship bottoms used in salt water for protection from fouling from barnacles and similar marine life.

Disperse thoroughly before each use by pouring most of the liquid off and working any settled pigment into a smooth paste using a stiff paddle. Continue by adding small portions of the liquid to the paste until paint is completely mixed.

The surface to be painted should be sandblasted and then given a coat of Wash Primer Specification MIL-P-15328B. Allow to dry 2 hours then apply four 1.5 Mil coats of Vinyl Red Lead Primer Specification MIL-P-15929B or Vinyl-Zinc Chromate Primer MIL-P-15929A. This should be followed by two 2.0 Mil coats of Vinyl Anti-Fouling Paint Specification MIL-P-16189A.

Allow 4 hours dry time between all coats except the final coat. Allow 4 hours after final coat of anti-fouling before painting. Under conditions of high humidity or low temperature this dry time should be increased to a minimum of 8 hours.

Apply by spray. If thinning is necessary use Vinyl Thinner or Methyl Isobutyl Ketone.



ONE GALLON

**IRRITANT
OPEN FLAME**

CAUTION!

CONTAINS XYLOL AND METHYL ISOBUTYL KETONE

Avoid contact with eyes and breathing of vapor or spray mist. In case of contact with eyes, flood repeatedly with clear water. CALL PHYSICIAN IMMEDIATELY. Avoid contact with skin. Keep away from heat, spark, and open flame. Contact with flame or hot surfaces may produce toxic gases. Do not transfer contents to unlabeled containers. Close container after each use. Harmful if swallowed. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place away from water supply.

Do not contaminate water by cleaning of equipment or disposal of wastes.

Use with adequate ventilation.

XBXOIT

KEEP OUT OF REACH OF CHILDREN

EPA REG. NO. 1719-30