

1719-41

FEB 2 1989

NOTICE OF PESTICIDE: REGISTRATION
 REREGISTRATION
(Under the Federal Insecticide, Fungicide,
and Rodenticide Act, as amended)

TERMS OF ISSUANCE
Conditional

NAME OF PESTICIDE PRODUCT
BLP Weather Protector Exterior
Wood Stain and Preservative

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

Mobile Paint Manufacturing Company, Inc.
P.O. Box 717
Theodore, AL 36590

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

All products are conditionally registered in accordance with FIFRA section 3(c)(7)(A), provided that you:

1. Submit/dite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data.
2. Make the labeling changes listed below before you release the product for shipment:
 - a. Add the phrase "EPA Registration No. 1719-41."
 - b. Add "This product contains Petroleum Distillates" near the ingredient statement.
 - c. Add "Do not coat painted or finished surfaces with this product" and "Use this product with soap and water after application. Do not use on surfaces."
3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the 2-73 enclosure for a further description of final printed labeling.

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL

Susan Lewis

DATE

3/2/89

239586 / 160
224331 /
1 18

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

K|

Lois A. Rossi
Product Manager (21)
Fungicide-Herbicide Branch
Registrator Division (TS-767C)

Enclosures

397

Approved
with Conditions
in EPA Letter Dated:

MARCH 2, 1989

Under the Federal Insecticide,
Fungicide, and Rodenticide Act
as amended, for the pesticide
registered under EPA Reg. No.

1719-41

BLP MOBILE PAINTS
WEATHER PROTECTOR
EXTERIOR WOOD STAIN & PRESERVATIVE

Active Ingredient
3-Iodo-2-Propynyl Butyl
Carbamate 0.5%

Inert Ingredients 99.5%
100.0%

Weight Per Gallon 8.08 Lb./Gal.

KEEP OUT OF REACH OF CHILDREN

CAUTION!

See other Cautions on Back Panel.

SOLID COLOR HIDING
FOR
WOODSIDING * TRIM * SHAKES & SHINGLES * FENCES

1 Gallon 3.785 Liters

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION: CONTAINS PETROLEUM DISTILLATES. HARMFUL IF SWALLOWED OR INHALED. Use only with adequate ventilation. Avoid breathing vapors or spray mist. Do not get in eyes, on skin or clothing. Wear goggles and rubber gloves when applying. Wear protective clothing and gloves when handling freshly treated lumber. Remove contaminated clothing and wash before reuse.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: DO NOT INDUCE VOMITING. CALL A PHYSICIAN IMMEDIATELY.

IF ON SKIN: Wash thoroughly with soap and water after handling.

IF IN EYES: Flush eyes with water and continue for 15 minutes. Call physician if irritation occurs.

IF INHALED: If overcome by fumes, remove victim to fresh air. If not breathing, apply artificial respiration, preferably mouth to mouth. Get medical attention immediately

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not apply directly to water. Do not contaminate water when disposing of equipment washwaters.

PHYSICAL AND CHEMICAL HAZARDS: Do not use or store near heat or open flame. In case of fire, use water spray, foam, carbon dioxide or dry chemical.

10/26/88

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

BLP Weather Protector Exterior Wood Stain and Preservative is a solid hide, penetrating oil based stain with additives to preserve wood. This product is formulated to withstand the extremes of southern weather to beautify, protect and preserve exterior wood surfaces. It preserves wood by controlling decay producing fungi, mildew, and surface mold.

BLP Weather Protector Exterior Wood Stain and Preservative can be mixed with Tran-Stain base to produce a semi-transparent stain which allows the grain and natural beauty of the wood to show through. The Color Studio Base provides hundreds of color possibilities and should be used only after the addition of Color Studio Colorants.

USE ONLY ON EXTERIOR SURFACES: BLP Weather Protector Exterior Wood Stain and Preservative is recommended for staining all bare new wood and previously unfinished wood such as rough-sawn or smooth siding, clapboard, beams, shakes, shingles (not asbestos), and fences which are above ground. For wood at or below ground use BLP Cop-R-Tox 74-1. Where wood is to be used on the ground's surface (e.g. landscape timbers), this product may be used as a booster to pressure-treated wood. For maximum performance, wood to be stained should be dry and absorbent.

SURFACE PREPARATION: Proper surface preparation is absolutely essential for satisfactory results. Surfaces to be stained should be dry and free from mildew, dirt, dust, oil and other contaminants. To remove dirt and mildew wash with a solution of 1 quart household chlorine bleach, 1 cup non-ammoniated household detergent and 1 gallon of water (wear protective clothing, goggles and rubber gloves when using this potentially harmful solution). If mildew persists, retreat with 1/2 gallon household bleach in 1/2 gallon water. Rinse all surfaces thoroughly and allow to dry completely before staining.

APPLICATION: Make sure that stain is thoroughly mixed before use. Cut and machine wood prior to treatment if possible. Thoroughly stain joints, cracks, cut-ends, holes or other openings in wood. This product may be applied by brush, roller or spray gun. Stain a few boards at a time working from top to bottom or side to side in order to keep a "wet edge" and avoid lap marks. Avoid staining in direct sunlight when temperature is below 50 degrees F. or if rain is threatening. Cover plants and shrubs to protect against possible injury from splash, drips or overspray. For uniformity of appearance and to maintain wood preservative properties, reapplication is recommended every 3 to 6 years.


607

This product is not recommended for use on primed, previously painted or otherwise sealed surfaces. Do not use on wood that will be in contact with food, feed, potable water or prolonged dermal (skin) contact. Due to the presence of petroleum distillates in this product, do not use where dairy cattle or livestock can come in contact with the treated wood.

APPROXIMATE COVERAGE: On rough wood 150 square feet per gallon; on smooth wood 250 square feet per gallon.

CLEANUP: Clean up drips, brushes and equipment with BLP MoPax01 75-1 or mineral spirits.

DRYING: BLP Weather Protector Exterior Wood Stain and Preservative dries to touch in 2-4 hours and to recoat or for use overnight under good drying conditions.

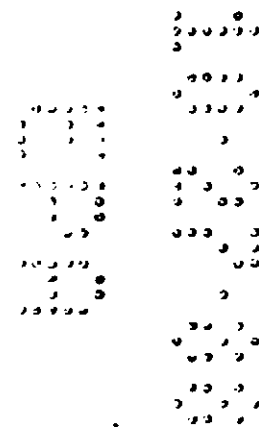

10/26/88

STORAGE AND DISPOSAL

STORAGE: Do not use or store inside the home. Do not store or use near heat or open flame.

DISPOSAL: Do not reuse original container. Securely wrap original container in several layers of newspaper and place in trash collection.

EPA EST. 1719-AL-1
EPA REG. NO. 1719-

MOBILE PAINT MANUFACTURING COMPANY, INC.
THEODORE, ALABAMA 36590

10/26/88