


BEST DOCUMENT AVAILABLE

7

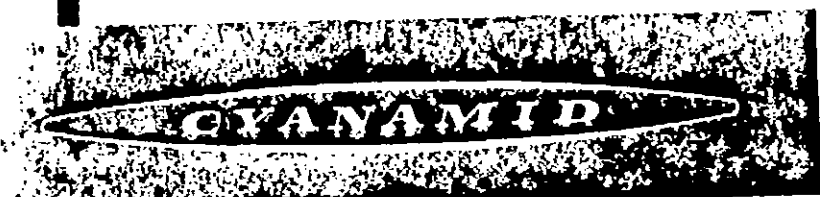

CYTOX 3711N Industrial Microbiocide

(FOR CONTROL OF BACTERIA, YEASTS, AND FUNGI IN INDUSTRIAL WATER SYSTEMS)



DANGER! KEEP OUT OF REACH OF CHILDREN
HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN
CAUSES BURNS OF EYES AND SKIN

Do not get in eyes, on skin, on clothing; wear goggles and rubber gloves.
Avoid breathing vapor or mist.
Keep container closed.
Use with adequate ventilation.
Wash thoroughly after handling.
Do not store near food or feed.

FIRST AID

In case of contact with eyes, flush with water for 15 minutes. If swallowed, induce vomiting and seek medical attention. If on skin, wash with water for 15 minutes. Call a physician for further treatment.

ACTIVE INGREDIENT
Vinylene bisulfocyanate
INERT INGREDIENTS

8%
92%

EPA Reg. No. 1730

DIRECTIONS FOR USE

PAPER MILLS: CYTOX 3711N is added to the white water system of the paper mill at a concentration of 0.1 to 0.2 pounds per ton of paper. The exact dosage will depend on the type of paper and the type of mill. It is important to maintain a constant level of the product in the white water system to ensure that the required dosage is added within a 24-hour period. If the dosage is not maintained, the microbiocidal effect may be reduced, allowing the growth of bacteria and fungi to resume.

SOLUTIONS AND EMULSIONS: For the preparation of solutions and emulsions, add 1 ounce of the liquid product to 100 gallons of water, or 1 part per million of the product. The product is stable in water for up to 12 hours. It is important to maintain a constant level of the product in the white water system to ensure that the required dosage is added within a 24-hour period.

SECONDARY OIL RECOVERY: For the preparation of solutions and emulsions, add 1 ounce of the liquid product to 100 gallons of water, or 1 part per million of the product. The product is stable in water for up to 12 hours. It is important to maintain a constant level of the product in the white water system to ensure that the required dosage is added within a 24-hour period.

The product is stable in water for up to 12 hours. It is important to maintain a constant level of the product in the white water system to ensure that the required dosage is added within a 24-hour period.

DRUM DISPOSAL: For the preparation of solutions and emulsions, add 1 ounce of the liquid product to 100 gallons of water, or 1 part per million of the product. The product is stable in water for up to 12 hours. It is important to maintain a constant level of the product in the white water system to ensure that the required dosage is added within a 24-hour period.



CORROSIVE LIQUID, N. O. S.