


**WOOD PRESERVATIVE
COPPER NAPHTHENATE MIXTURE
OIL SOLUBLE
SHIP AND BOAT USE**

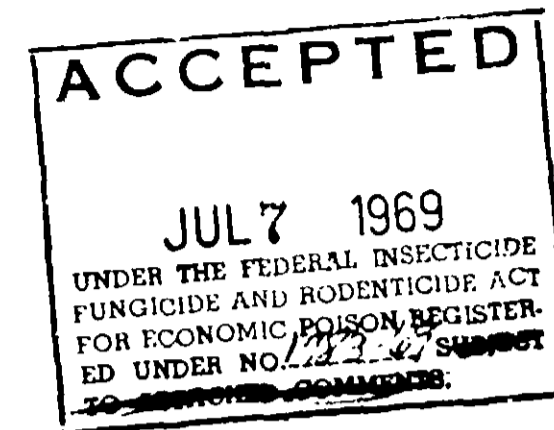

ACTIVE INGREDIENTS:

023102	COPPER NAPHTHENATE	20%
	(Copper, as metal, 2.0%)	
003503	PETROLEUM DISTILLATE	80%
		<hr/> 100%

TRIO CHEMICAL WORKS, INC.
BROOKLYN, N. Y.

CAUTION: KEEP OUT OF REACH OF CHILDREN

1 GALLON

CAUTION: — Flammable; avoid fire hazard; AVOID skin contact or introducing into eyes. AVOID prolonged inhalation of fumes. Work area should be outdoors or well-ventilated room. Use of goggles and protective clothing is recommended. Wash well with soap and water after using or handling this material.

INTENDED USE: — For preventing the decay of wood; compatible with subsequent gluing, caulking and painting operations.

DIRECTIONS FOR USE: — Apply by dipping or with a brush. It is necessary to treat all surfaces. End grain surfaces should receive thorough and repeated applications. Repeat application after wood surfaces have been cut, bored or sanded. Do not place treated lumber or plywood in solid piles as this prevents solvent evaporation. Allow treated surfaces to dry before subsequent gluing, painting or caulking. The usual drying time for a brush application is 24 hours, for a 3-minute dip, 72 hours. Large vats of preservative solution should be covered when not in use to prevent solvent evaporation.

USDA REG. NO. 1783-69