

PART MIX WITH 305 AF PART A

180~-4 USDA Registration No. 3:7.86x8:

Active Ingredients

Tributyltin Acetate 31.9°° Inert Ingredients . 68.1°°

DANGER!



POISON!

KEEP OUT OF THE REACH OF CHILDREN

IF SWALLOWED, MAY BE FATAL OR CAUSE BLINDNESS. VAPOR HARMFUL. SKIN AND EYE IRRITANT.

PART MIX WITH 305 AF PART A


See other dangers and antidote statements on blick panel

PAT. PEND.

1.47 U. S. QUARTS **NET WEIGHT 3.68 POUNDS**

305 AF PART B

PREPARATION OF MATERIAL

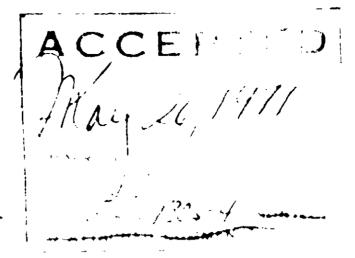

BEFORE OPENING ANY CONTAINERS, READ THE SAFETY AND APPLICATION GUIDE AC-COMPANYING SHIPMENT.

WHEN YOU HAVE READ AND UNDERSTAND THE GUIDE, ACQUIRE THE NECESSARY SAFETY EQUIPMENT AND APPLICATION EQUIPMENT BEFORE PROCEEDING WITH THE MATERIAL USE.

WARNING — FLAMMABLE! KEEP AWAY FOR HEAT, SPARKS AND OPEN FLAME.

CONTAINS DIETHYLENETRIAMINE, METHANOL AND TRIBUTYLTIN ACETATE

DANGER!

If swallowed, induce vomiting. CALL PHYSICIAN IMMEDIATELY. Do not get in eyes, on skin or clothing. In case of eye contact, flood immediately with plenty of water. For eyes, CALL PHYSICIAN. In case of skin contact, wash with soap and water. Remove contaminated clothing, including shoes. Wash clothing before re-use. Discard contaminated shoes. Avoid contact with skin and vapor or spray mist. Keep away from heat, sparks and open flame. Close container after each use. DO NOT STORE NEAR FOOD OR FOOD PRODUCTS.

Use only with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

The toxicant in this material may be absorbed through the skin and is classified as a primary skin irritant. It is regarded as a hazardous product and every precaution should be taken to prevent swallowing and eye or skin contact when handling or applying. Workers should be in complete protective clothing including respirators, gloves, eye protection or face shields while mixing and applying this material. Spray men should be equipped with air line respirators.

Do not reuse empty container. Destroy by perforating or crushing. Bury or discard in a safe manner.

For industrial use and professional application only. Not intended for sale to general public.

Notice This material is of the manufacturer's standard high quality. If applied according to label directions, good results should be obtained. However, because of varying surface conditions, different degrees of skill in application, and other conditions beyond control of the manufacturer or seller, neither makes any warranty of the material or quarantee of results in use and will accept no responsibility beyond the purchase price of this material.

E 050 B 3W

Manufactured for PORTER COATINGS

DIVISION OF
PORTER PAINT CO., LOUISVILLE, KY. 40201