


NET FIVE U. S. GALLONS

Penta Wood Preservative

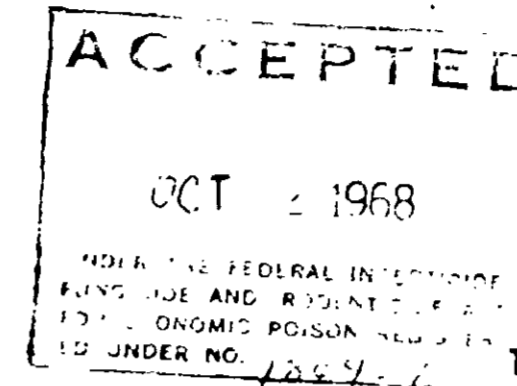

Penta Wood Preservative
READY TO USE

COLUMBIA

U. S. D. A. REG. No. 1864-7

CLEAR OIL WOOD PRESERVATIVE FOR CLEAN TREATMENT OF LUMBER, MILLWORK, PLYWOOD, AND OTHER FOREST PRODUCTS. PENETRATING AND PAINTABLE. SLIGHT PETROLEUM ODOR.

ACTIVE INGREDIENTS:

| | |
|---|-------|
| PENTACHLOROPHENOL | 4.5% |
| OTHER CHLOROPHENOLS AND RELATED COMPOUNDS | 0.5% |
| PETROLEUM HYDROCARBONS | 91.9% |

INERT INGREDIENTS

3.1%

100.0%

5% Pentachlorophenol as determined by Federal Specification TT-W 570.

Penta Wood Preservative is a clean solution for protecting wood against fungus growths which cause rot and stain, termites, lyctus (powder post) beetles and carpenter ants.

Penta Wood Preservative is especially effective in termite control, both as a wood preservative and as a soil poison. Penta Wood Preservative conforms to Western Pine Associations formulation and to the Standard established by the National Woodwork Manufacturers Association.

WOOD PRESERVATION

Before treatment, all wood should be normally dry. All unsound wood should be removed two feet beyond any visible evidence of decay.

For best results, Penta Wood Preservative should be applied so as to effect maximum penetration into the wood and maximum absorption at joints and ends. Complete immersion, where possible, in an open tank is the best procedure for accomplishing this. At least five minutes immersion per inch thickness is recommended for all cases. Where wood will be in direct contact with the ground, such as in the case of fence posts, the immersion period should be from 12-48 hours, and the posts should be peeled of bark, dry and well seasoned.

Where the immersion treatment is impractical, heavy brush application may be used. Where the wood will be in direct contact with the ground, several brush applications should be given.

Permit preserver to dry at least 48 hours before applying paint. Estimated coverage: 5 to 10 gallons per 1000 board feet for open tank treatment; 200 square feet per gallon for brush application.

FISH AND WILDLIFE CAUTION
This product is toxic to fish and wildlife. Apply this product only as specified on this label.

COMBUSTIBLE

Do not use or store near heat or open flame.

PRINTED IN U.S.A.

CAUTION
KEEP OUT OF REACH OF CHILDREN
See caution on side panel

CENTRAL PETROLEUM COMPANY
Cleveland, Ohio — Walcott, Iowa

TERMITE CONTROL

Clean out carefully all loose wood and debris under or around infested buildings. Spray at ground under buildings at rate of two gallons of PENTA WOOD PRESERVATIVE per five square feet of ground. Break all wood-to-earth contacts, such as steps, door frames, etc., and replace with Penta treated wood or concrete. Where construction permits, dig a trench around all foundations to a depth of at least 30 inches but not below the top of the footings. If trench is up to 15 inches deep, five gallons of the PENTA WOOD PRESERVATIVE should be used for 10 linear feet. If deeper than 15 inches, ten gallons should be used per 10 linear feet. In either case, one half of the amount should be added at bottom of trench and the rest added to the back-fill. Grass, flowers, trees and shrubs within 3 feet of trench should be removed or protected by tar paper or heavy kraft-paper.

WARNING: Do not breathe vapors or spray mist. Causes skin irritation. Is harmful if swallowed or absorbed through skin. Do not allow to contact skin, eyes, or clothing. Keep away from foodstuff, children, pets and livestock. To remove from skin wash with plenty of warm water and soap. In case of swallowing induce vomiting by administering an emetic. Call a physician.

COMBUSTIBLE

Do not use or store near heat or open flame.