


CS 4336 O DAME-1

10 4630

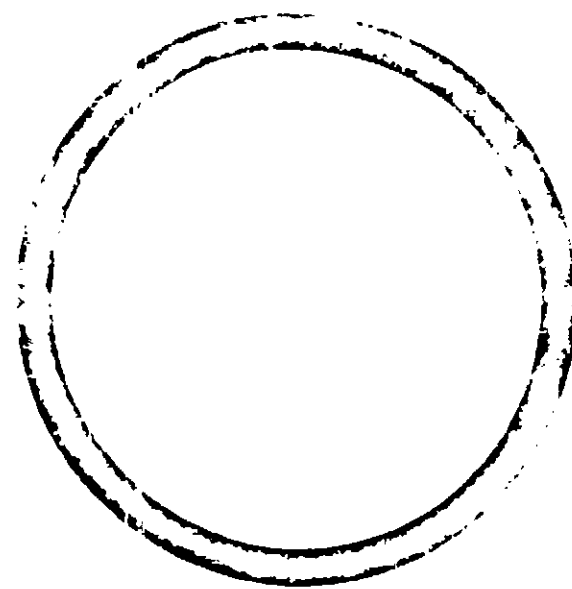

Steelcote

FOR PROFESSIONAL OR INDUSTRIAL USE ONLY

Damp-Tex

CAUTION! COMBUSTIBLE
See cautions back of label.

Gloss White

EX-110

PRETREATED LOW ODOR TYPE

This product is pretreated for prevention of fungus growth on the surface with the following active ingredients:
Triphenyltin chloride (TTC) 1.0%
INERT SOLVENT

NOTICE: DAMP-TEX is authorized by the United States Department of Agriculture for use in federally inspected and poultry establishments. EPA Reg. No. 414

ONE GALLON (128 FL. OZ.) CONTAINS 1.0% OF ACTIVE INGREDIENTS

CAUTION: When Damp-Tex is applied on well closed in areas, all persons should be removed or wear respirator for protection. Do not use in areas where it is possible to breathe the vapor. Remove all food before painting and do not put the food or room back into use until the paint odor has been dissipated.

DO NOT USE IN AREAS WHERE FOOD IS STORED OR PREPARED. DO NOT USE IN AREAS WHERE FOOD IS PREPARED OR STORED. DO NOT USE IN AREAS WHERE FOOD IS PREPARED OR STORED. DO NOT USE IN AREAS WHERE FOOD IS PREPARED OR STORED.

Manufactured in U.S.A. by
STEELCOTE MFG. CO.
Spartanburg, N.C. 29103

WARRANTY: In lieu of all other warranties or guarantees, express or implied, by contract or law, manufacturer's liability is hereby limited to replacement of the merchandise herein if found to be defective upon inspection by it. Manufacturer shall not be liable for any verbal claims or recommendations for use of this product made by any of its agents, representatives, sales or employees. This warranty is void if the product is not used as directed.

Steelcote

FOR PROFESSIONAL OR INDUSTRIAL USE ONLY

DAMP-TEX

VISIBLE
back of label.

Gloss White DX-110

PRETREATED LOW ODOR TYPE

It is pretreated for prevention of fungus and mildew growth and is painted with the following ingredients:


INGREDIENTS

1. Zinc Oxide (ZnO) 10.0%

2. Titanium Dioxide (TiO₂) 10.0%

NOTICE: DAMP-TEX is authorized by the United States Department of Agriculture for use in federally inspected meat and poultry establishments. EEA 100, No. 214, 100

ONE GALLON U.S. STANDARD MEASURE - 3.785 LITERS

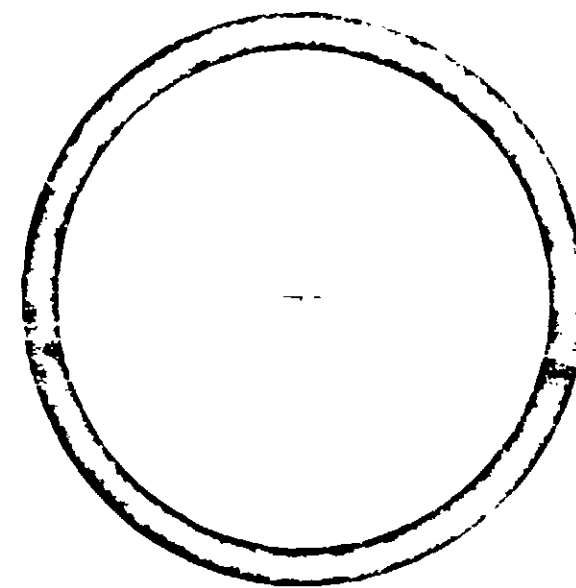

For damp wood, metal or concrete surfaces in Packing Houses, Dairies, Breweries, Bottling Plants, Laundries, Bath Houses, Refrigerators, Ice Plants

HOW TO PREPARE SURFACE

1. Surfaces to be painted must be clean, dry and free of oil, grease, dirt, etc. 2. Surfaces must be free of loose material, scale, etc. 3. Surfaces must be free of rust, etc. 4. Surfaces must be free of water, etc. 5. Surfaces must be free of any other material that might interfere with the paint.

HOW TO APPLY DAMP-TEX ENAMEL

1. Use a brush or roller to apply the paint. 2. Apply the paint in a thin, even coat. 3. Allow the paint to dry for 24 hours. 4. Apply a second coat if necessary. 5. The paint is suitable for use on damp surfaces.

HOW TO USE DAMP-TEX ENAMEL

NEW PLASTER AND CEMENT SURFACES: 1. Clean the surface. 2. Apply the paint in a thin, even coat. 3. Allow the paint to dry for 24 hours. 4. Apply a second coat if necessary.

NEW AND OLD WOOD SURFACES: 1. Clean the surface. 2. Apply the paint in a thin, even coat. 3. Allow the paint to dry for 24 hours. 4. Apply a second coat if necessary.

NEW METAL SURFACES: 1. Clean the surface. 2. Apply the paint in a thin, even coat. 3. Allow the paint to dry for 24 hours. 4. Apply a second coat if necessary.

PLASTER, CONCRETE OR WOOD SURFACES: 1. Clean the surface. 2. Apply the paint in a thin, even coat. 3. Allow the paint to dry for 24 hours. 4. Apply a second coat if necessary.



CHARTERED BY THE U.S. GOVERNMENT - All Rights Reserved - Additional Charges

1/1/54

1/1/54

154320-1