

TERMI-TOX

A STAINLESS WOOD PRESERVATIVE

TERMI-TOX

TERMI-TOX kills termites, Lyctus Powder Post Beetles and other wood boring insects.

TERMI-TOX prevents wood-boring insect infestations due to its remarkable lasting qualities.


TERMI-TOX protects from decay as it prevents wood rotting fungi and other wood degrading organisms.

TERMI-TOX gives lasting protection as it is practically insoluble in water—does not wash or bleach out.

TERMI-TOX has excellent wood penetration qualities. The active toxic agent remains in the wood after carrier has evaporated.

TERMI-TOX does not discolor. No objectionable odor. Treated wood readily paintable. Good putty adhesion.

6/18-1/1958
62-6-76

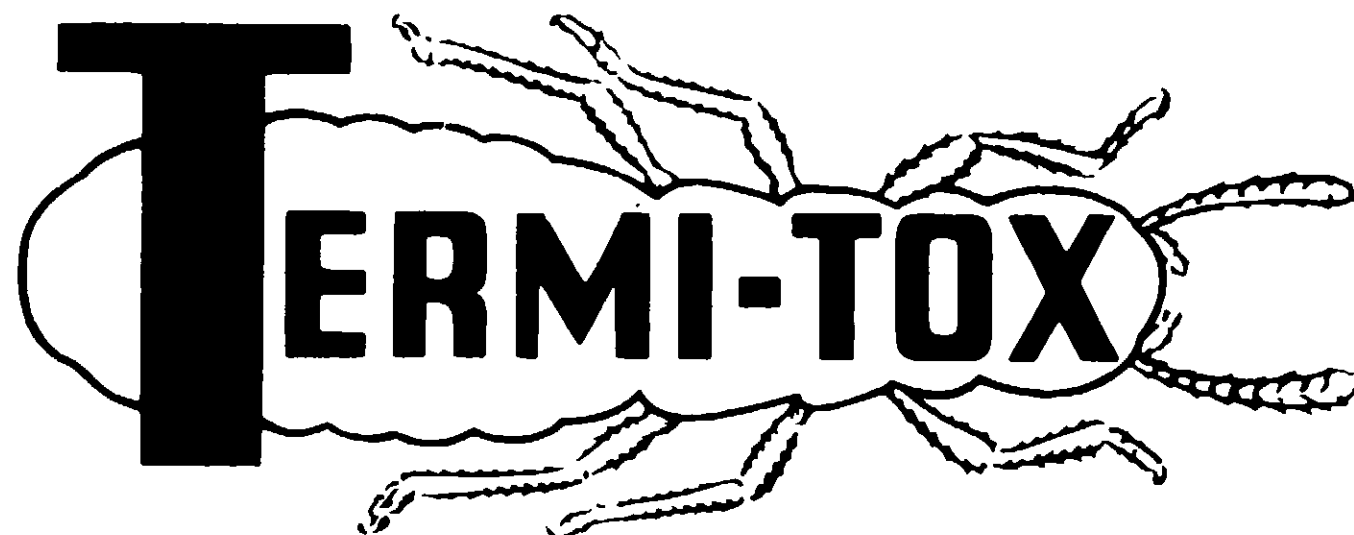

KILLS AND PREVENTS TERMITES



DANGER POISON

Keep Out of Reach of Children
SEE ANTIDOTE STATEMENT AND OTHER PRECAUTIONS ON THE SIDE PANEL.

ANTIDOTE
ANTIDOTE FIRST AID--IF SWALLOWED Give tablespoon of salt in a glass of warm water and repeat until vomit fluid is clear. Give two teaspoonfuls of baking soda in a glass of water. Have patient lie down and keep warm. Cover eyes to exclude light. **CALL A PHYSICIAN.**
SKIN: Swab with cotton soaked in rubbing alcohol. Apply a paste of baking soda and water.

ROOFING: Wooden shingle roofing may be protected against rot and moss growth, by making two flowing brush applications to the shingles before staining. This is particularly valuable in areas where shingles remain damp at the eaves and heavy shade does not allow them to dry. Desired color pigments may be added to Termi-Tox for roof staining. Use one gallon Termi-Tox to approximately 180 square feet of shingles.
DIPPING TREATMENT FOR TIMBERS AND POSTS. This method affords the best protection for heavy timber wood members which are well seasoned and free of bark. Allow 12 to 48 hours for proper Termi-Tox penetration. Stakes, as well as fabricated products, such as doors and windows should be dipped from 3 to 30 minutes each depending on type of wood. Do not dilute. Use as is. Wear rubber gloves and wear protective clothing when handling freshly treated wood.



DIRECTIONS

HOW TO USE: Wood which is intended for use in contact with the soil or that may be used in areas exposed to fungus and conditions should be preserved with Termi-Tox. Spray or brush the Termi-Tox on all wood members with two flowing coats, allowing the first to soak in before making the second application or dip as indicated below. Thoroughly treat ends of all wood members.

UTILITY BUILDINGS: When constructing new buildings, such as grain bins, pump houses, tool or utility sheds, the wood members of adjacent foundation timber should always be thoroughly treated. Wood trunks and framing should be treated before or during construction.

BOAT DOCKS AND RAMPS: All timbers, including the ends and posts, of all docks and ramps should be treated with Termi-Tox before the material is submerged in the water.

FENCE POSTS: For vegetable, field, fence posts and wood posts for utility, soaking in a bucket of Termi-Tox before application. Treat a new area only once after the application. Do not water the soil for several days after application. For utility, field, fence posts and boat docks.



PRESERVES WOOD

PROTECTS YOUR HOMES, BUILDINGS, FENCE POSTS, AND ALL WOODEN STRUCTURES AGAINST TERMITE INFESTATION AND WOOD ROTTING FUNGI.

MAKES WOOD LAST YEARS LONGER

5 U. S. GALLONS

CONTAINS METHANOL

ACTIVE INGREDIENTS:	
Pentachlorophenol	4.4%
Other Chlorophenols	0.6%
Pine Oil	3.0%
Petroleum Distillates	87.0%
INERT INGREDIENTS	5.0%
Total 100.0%	

Contains 5.4% Technical Pentachlorophenol 1 lb. per gallon as defined in Federal Spec. TT-W 570.

Termi-Tox is an exclusive Gordon formula often imitated never duplicated.
DANGER: Harmful or Fatal if swallowed or absorbed through the skin. Causes skin irritation. Do not breathe vapor, fumes or spray mist. Vapor harmful. Do not get into eyes, on skin or on clothing. Wear rubber gloves and protective clothing when handling freshly treated lumber. Wash thoroughly. Do not take internally.
This product is toxic to fish, birds, and other wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.
Methanol may cause blindness.
Do not use in or near open flame. Flammable vapors. Do not breathe vapors. Wash thoroughly with soap and water.
Do not use in or near open flame. Destroy it by perforation or incineration. Do not use in a safe place away from water.
EPA Reg. No. 724-0100AA
WARNING FLAMMABLE!
KEEP AWAY FROM HEAT OR OPEN FLAME

MANUFACTURED BY

PBI - GORDON CORPORATION

KANSAS CITY, KANSAS 66118

EPA Est. No. 2217 KS 1