



over 6,000 square feet.

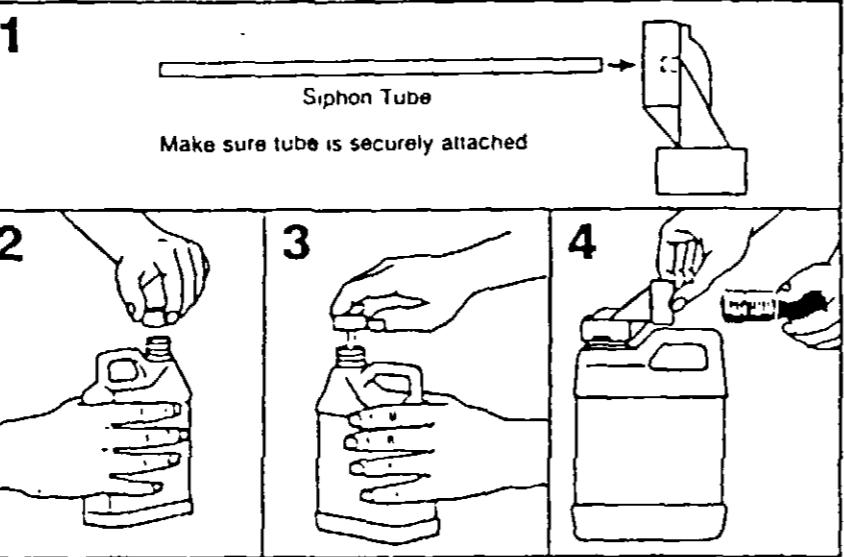

ASSEMBLY INSTRUCTIONS

1. Attach siphonage tube to hose-end sprayer attachment.
2. Remove cap from bottle and insert sprayer attachment.
3. Securely tighten sprayer attachment on bottle.
4. Screw hose into hose-end sprayer attachment.

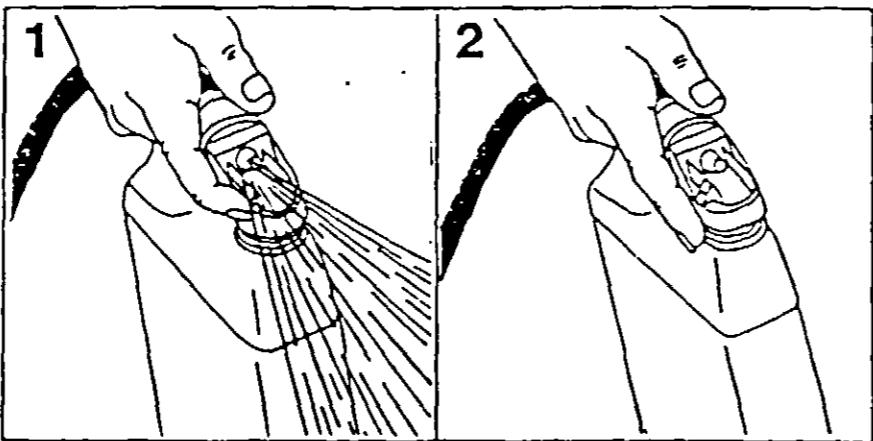

SPRAYING INSTRUCTIONS

1. Turn on water. TO START FLOW OF PRODUCT: Place finger over hole on top right side of sprayer attachment. Hold about 3 feet above area to be treated moving at a steady pace to ensure consistent coverage.
2. TO STOP FLOW OF PRODUCT: Remove finger from hose to break siphon action. NOTE: To ensure adequate coverage, use moderate to high water pressure when applying through hose-end sprayer attachment.