


تذلاء فمقالة الأدقية إثارت فعلله الاعتما



2: 1: 2. - -2274-2

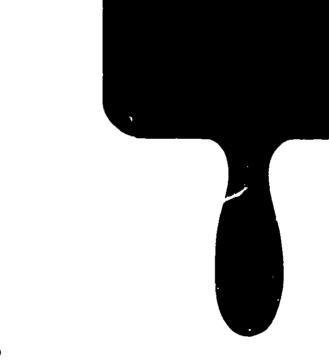

2300

Copper Naphthenate Preservative

DANGER! HARMFULL OR FATAL IF SWALLOWED. See Precautions on Back Panel.

CONTENTS: (1) (5) GALLONS

Gives long lasting protection to wood, canvas and rope. Checks decay. fungi, termites, and other insects.

Do not thin **COPPER NAPHTHENATE**. Apply liberally to obtain maximum protection. Old paint film and rotten wood should be removed. Clean away all loose particles and dust. Apply two flowing coats when brushing or spraying. When dipping, allow 30 minutes soaking time for wood not more than 1 inch thick. Soak heavy timbers overnight. Dip canvas or rope to wet through.

If treated wood surfaces are to be painted, allow at least 48 hours drying time before painting. When white and light tints are used, slight discoloration may occur. Discoloration will disappear after the second coat is applied if the wood is throughly seasoned and dry.

This product is manufactured to rigid quality-control specifications. As it is impossible to control use and application of the product, the company's warranty is limited to replacing such quantities of the product as are proven to be defective. There are no warranties, either expressed or implied, that are not expressly endorsed hereon.

CAUTION! COMBUSTIBLE! CONTAINS PETROLEUM DISTILIATE.

If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY. Keep away from heat and open flame. Avoid prolonged contact with skin and breathing of vapor or spray mist. Do not transfer contents to unlabeled bottles or other containers. Close container after each use.

> Use only with adequate ventilation **KEEP OUT OF THE REACH OF CHILDREN.**

INGREDIENTS

Active Ingredients: Copper Naphthenate Petroleum Distillate

(Copper as Metal 1°.) Meets National Bureau of Standards Specifications CS 152-18

10°° 90°° 100%

> southern protective products co. ATLANTA, GEORGIA 30310

COPPER NAPHTHENATE PRESERVATIVE

U.S.D.A. Registration No. 2279-2

DIRECTIONS