

Net Contents 5 Gallon

BLOXROT-C

PENTA CONCENTRATE 1-10

DILUTION: Before using dilute BLOXROT-C with ten parts by volume of mineral spirits, kerosene, light kerosene, or petroleum equivalent. Then make a ready to use solution containing 5% by weight of Pentachlorophenol. All of the directions pertain to use of this 5% solution.

DIRECTIONS

WOOD PRESERVATION

For best results, BLOXROT-C should be applied so as to effect maximum penetration into the wood and absorption, especially at joints and wherever end grain exists. Open tank treatment or complete immersion of the wood in the BLOXROT-C solution is generally recommended for five minutes per inch of thickness. It should be noted that wood in contact with the ground, such as fence posts, will need maximum protection.


Where open tank treating is impractical as in the case of an existing structure a heavy brush application of BLOXROT-C should be applied, cutting out and removing all unsound wood, two feet beyond any visible evidence of decay. All wood should be normally dry, and the framing or cutting completed before the BLOXROT-C treatment. See other directions for termite control.

Do not paint or varnish wood that has been treated with BLOXROT-C until it has dried for 48 hours.

Estimated coverage: 5 to 10 gallons per thousand square feet for open tank treating; 200 square feet per gallon for brush application.



ACCEPTED

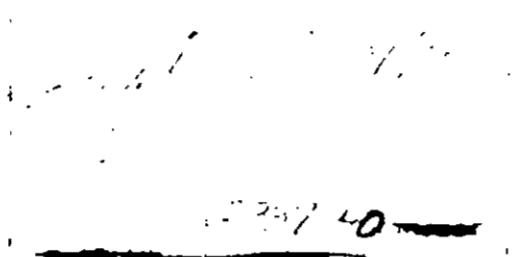


**ESPECIALLY
RECOMMENDED
FOR CONTROL
OF TERMITES**

Concentrate 1-10

BLOXROT-C

PENTA WOOD PRESERVATIVE

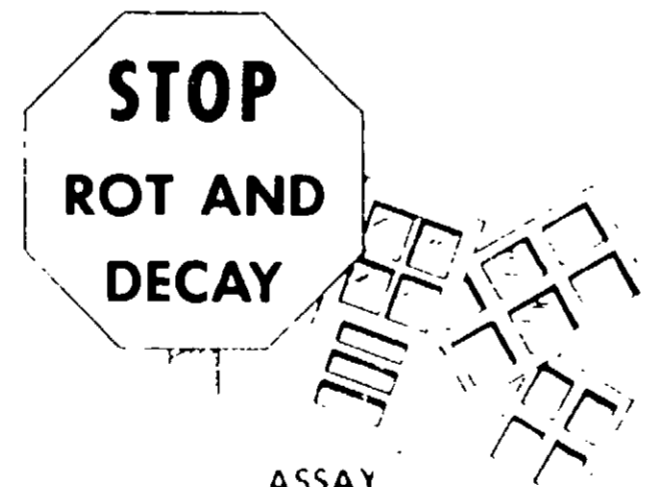

DANGER HARMFUL OR FATAL IF SWALLOWED

SEE CAUTION STATEMENT ON RIGHT SIDE PANEL

KEEP OUT OF REACH OF CHILDREN

U.S.D.A. REG. NO. 223740

DIRECTIONS TERMITE CONTROL

See instructions on other side panel for preparation of 5% solution before proceeding with use of BLOXROT-C.

Clean out carefully all loose wood and debris under or around infested buildings. Spray all ground under buildings at rate of 2 gallons of BLOXROT-C per five square feet of ground. Break all wood to earth contacts, such as porch steps, door frames, etc., and replace with BLOXROT-C treated wood or concrete. Where construction permits, dig a trench 30 inches deep around the entire building foundation but not below the top of the footing if this is shallower. Five gallons of the 5% solution should be used per 10 linear feet of trench for trenches up to 15 inches deep. For deeper trenches, 10 gallons of 5% solution per 10 linear feet of trench must be used.

Trees, shrubbery or flowers should be protected from the treated soil by tar or heavy kraft paper. BLOXROT-C used as a soil poison as directed will adequately protect or insulate buildings against subterranean termite attack.

Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry and well-seasoned and immersed in the 5% solution for a period of 12 to 48 hours to be an effective wood preserver.

It is recommended that protective clothing and rubber gloves be worn when handling the freshly treated lumber.

BLOXROT-C is toxic to fish and wildlife. Do not contaminate water by cleaning of equipment or disposal of wastes.

CAUTION!

HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN! Causes skin irritation. Do not breathe vapor or spray mist. Do not get in eyes, on skin or on clothing. Wash thoroughly after handling.

In case of swallowing, administer an antidote such as milk, raw egg white, gruel or cornstarch paste. Follow with emetic using mustard water, salt water, finger down throat or other methods. CALL PHYSICIAN IMMEDIATELY.

DO NOT USE OR STORE NEAR HEAT OR OPEN FLAME.

DEMERT & DOUGHERTY, Inc.
CHICAGO • MILWAUKEE
ST. LOUIS • KANSAS CITY

ASSAY

ACTIVE INGREDIENTS	
Pentachlorophenol	37.41
Oil Soluble Copper	1.58
Oil Soluble Borax	1.58
INERT INGREDIENTS	
Diethylene Glycol	44.54
Acrylic Acid	1.2
Butyl Diglycidyl Ether	1.24
Polyethylene Glycol	1.2
Water	1.2
TOTAL	100.00

1 Gallon makes 11 Gallons 5% Ready-To-Use Pentachlorophenol Solution.

Clear Oil Wood Preservative For Clean Treatment of Lumber, Millwork, Plywood, and Other Forest Products.

Prevents Rot — Decay — Fungus — Mold.

Extra Effective Against Termites and Lyctus Beetles.