


2342-917





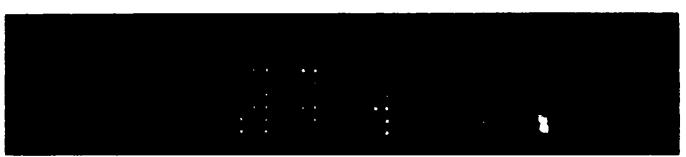

COTTON DEFOLIANT 1.

DIRECTIONS FOR USE

Best defoliation occurs on cotton when the nitrogen and moisture content of the plant are nearly or completely exhausted. It is better to apply defoliant late to insure a higher yield of better quality fiber. At least 75 percent and preferably 85 to 90 percent of the bolls should be open at the time of application. Youngest bolls expected to make cotton should be at least 30 days old. The recommendations of your State Agricultural Experiment Station or State Agricultural Extension Service should be followed.

FOR AIRPLANE APPLICATION. Apply 2-2½ gallons of COTTON DEFOLIANT in 10-15 gallons of water per acre. FOR GROUND APPLICATION: Apply 2-2½ gallons of COTTON DEFOLIANT in 15-30 gallons of water per acre. The defoliant must be distributed uniformly to cover every leaf to obtain best results. Use of coarse spray nozzles is recommended. Satisfactory defoliation is usually secured with one application, however, with dense cotton a second may be required.

Do not apply within 7 days of harvest. Do not grace treated areas or feed gin waste to livestock.

Contains 2 pounds Sodium Chlorate per Gallon

CAUTION

KEEP OUT OF REACH OF CHILDREN

MAY CAUSE SKIN IRRITATION HARMFUL IF SWALLOWED

This product is non-selective and is harmful to all vegetation. Spray, drift, seepage and dramas will injure or kill all vegetation.

Wash spray equipment thoroughly after each use. Empty container must be thoroughly wisher and decontaminated before reuse. Store in original container. Do not store with foodstaff

Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this conduct only as specified on this label.

EPA REG NO. 9132-294

NET CONTENTS -

Check these Directions For Use with your State Agricultural Experiment Station or State Agricultural Extension Service and consult U.S. Food and Drug Administration to defermine maximum residues allowable as 15-1 these residues may be poisonous. Nothing hereon is a recommendation that this material be used in violation of any patent, and no implied warranty is made that the material is fit for other than the ordinary purposes 8-72 for which the material is used. The manufacturer shall in no event be liable for consequential damages.

MANUFACTURED BY

KERR-MCGEE CHEMICAL CORP.

OKLAHOMA (II.) OKLAHOMA