



WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.


FIRST AID

If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

If in eyes: Flush with plenty of water. Get medical attention.

If on skin: Wash with plenty of soap and water. Get medical attention.

If inhaled: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.



ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
(and Domestic Animals)



Regatta

ESTABLISHED

VINYLTEX 55

FAST RED ANTI-FOULING



ACCEPTED
JAN 18 1983
Under the Federal Insecticide, Fungicide, and Rodenticide Act
EPA Reg. No. 2568-11

ACTIVE INGREDIENTS
Copper Oxide (Copper) 10.00%
Metal 41.57%
INERT INGREDIENTS 48.43%

10.00%
41.57%
48.43%


CONTAINS PETROLEUM DISTILLATES
KEEP OUT OF THE REACH OF CHILDREN

WARNING!

SEE SIDE PANEL FOR ADDITIONAL
PRECAUTIONARY STATEMENTS

EPA Establishment No. 2568 MD 01
EPA Registration No. 2948 11

JOTUN BCP MARINE COATINGS

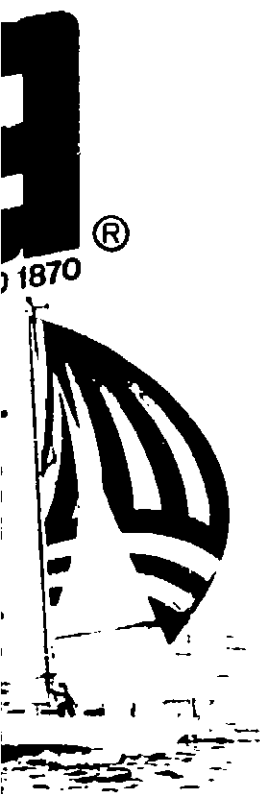

ANALYSIS	
VINYLTEX 55 FAST RED ANTI-FOULING	
PIGMENT 58.63%	
Red Iron Oxide	4.86%
Cuprous Oxide	49.24%
Sodium Chromate	0.32%
Inert Ingredients from	
Cuprous Oxide	2.59%
Silicates	1.62%
VEHICLE 41.37%	
Vinyl Chloride Resin	5.18%
Rosin	5.18%
Tricresyl Phosphate	1.83%
Aromatic Hydrocarbons	11.60%
Ketones	17.52%
	100.00%

(V-31-2)

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Outstanding Anti-Fouling Protection . . . the ultimate in a fast, hard, racing surface for wood, fiberglass or metal.

DIRECTIONS — WOODEN HULLS. Apply directly to dry bare wood, thinning the first coat 10% with Regatta Vinyltex 54 Solvent. Apply other coats full body, replacing solvent lost by evaporation with Regatta Vinyltex 54 Solvent. Brush, spray or roll a full wet coat so the Anti-Fouling paint will flow together eliminating any pin-holes or "holidays." Use at least 3 coats. Flow on with minimum brushing to prevent dissolving and working up undercoats.

STEEL and ALUMINUM HULLS. Prepare surface with Regatta Vinyltex 50 Wash Primer and four coats of Regatta Vinyltex 53 Zinc Chromate Anti-Corrosive or three coats of Regatta Epoxydur Black. Apply at least two coats of Regatta Vinyltex 55 Anti-Fouling Fast Red.

FIBREGLASS HULLS. Sand thoroughly with medium grit paper and wash with 3840 Fibreglass Solvent. Wash to remove all traces of mold release agent. For added insurance of good adhesion, a coat of REGATTA Fibreglass Primer may be applied next. Then, apply two coats of Vinyltex 55 Anti-Fouling Fast Red.

SPRAYING. Thin 10% with Regatta Vinyltex 54 Solvent for spraying. Wash Equipment with Regatta Vinyltex 54 Solvent.

DRYING TIME. Allow 1 hour between coats and at least 4 hours between the final coat and launch.

Close container after each use.

STORAGE AND DISPOSAL

PESTICIDE: Any of this material, or residue solvent that cannot be used according to label instructions must be disposed of according to Federal or approved state procedures under Subtitle C of the Resource Conservation and Recovery Act.

CONTAINER: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

1 U.S. GALLON

3.785 LITERS



JOTUN — BALTIMORE COPPER PAINT CO.

BALTIMORE MD 21230

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
(and Domestic Animals)

eye and skin irritation. Do not get in eyes. If in eyes, flush with water for 15 minutes. If on skin, wash with soap and water. Do not eat, drink, or smoke while using. Do not breathe vapors. Do not get on clothing. Do not get on food. Do not get on pets. Do not get on children. Do not get on pregnant women. Do not get on nursing infants. Do not get on people with asthma or other respiratory conditions. Do not get on people with heart disease or other medical conditions. Do not get on people who are taking medicine. Do not get on people who are pregnant or nursing. Do not get on people who are allergic to copper. Do not get on people who are allergic to petroleum distillates. Do not get on people who are allergic to vinyl. Do not get on people who are allergic to red. Do not get on people who are allergic to anti-fouling. Do not get on people who are allergic to Jotun. Do not get on people who are allergic to BCP Marine Coatings. Do not get on people who are allergic to Regatta. Do not get on people who are allergic to ESTABLISHED 1870. Do not get on people who are allergic to VINYLTEX 55. Do not get on people who are allergic to FAST RED ANTI-FOULING. Do not get on people who are allergic to CONTAINS PETROLEUM DISTILLATES. Do not get on people who are allergic to KEEP OUT OF THE REACH OF CHILDREN. Do not get on people who are allergic to WARNING!. Do not get on people who are allergic to SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS. Do not get on people who are allergic to EPA Establishment No. 2568-MD-01. Do not get on people who are allergic to EPA Registration No. 2568-11. Do not get on people who are allergic to JOTUN BCP MARINE COATINGS. Do not get on people who are allergic to Regatta. Do not get on people who are allergic to ESTABLISHED 1870. Do not get on people who are allergic to VINYLTEX 55. Do not get on people who are allergic to FAST RED ANTI-FOULING. Do not get on people who are allergic to CONTAINS PETROLEUM DISTILLATES. Do not get on people who are allergic to KEEP OUT OF THE REACH OF CHILDREN. Do not get on people who are allergic to WARNING!. Do not get on people who are allergic to SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS. Do not get on people who are allergic to EPA Establishment No. 2568-MD-01. Do not get on people who are allergic to EPA Registration No. 2568-11. Do not get on people who are allergic to JOTUN BCP MARINE COATINGS.

Regatta®

ESTABLISHED 1870

VINYLTEX 55

FAST RED ANTI-FOULING

ACCEPTED
JAN 18 1983
Under the Federal Insecticide, Fungicide, and Rodenticide Act, amended, for this use, to be registered under EPA Reg. No. 2568-11

ACTIVE INGREDIENTS
Cuprous Oxide (Copper, as Metal 44.57%) 49.24%
INERT INGREDIENTS 50.76%
100.00%

CONTAINS PETROLEUM DISTILLATES
KEEP OUT OF THE REACH OF CHILDREN

WARNING!

SEE SIDE PANEL FOR ADDITIONAL
PRECAUTIONARY STATEMENTS

EPA Establishment No. 2568-MD-01
EPA Registration No. 2568-11

JOTUN BCP MARINE COATINGS



DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Outstanding Anti-Fouling Protection . . . the ultimate in a fast, hard, racing surface for wood, fiberglass or metal.

DIRECTIONS — WOODEN HULLS. Apply directly to dry bare wood, thinning the first coat 10% with Regatta Vinyltex 54 Solvent. Apply other coats full body, replacing solvent lost by evaporation with Regatta Vinyltex 54 Solvent. Brush, spray or roll a full wet coat so the Anti-Fouling paint will flow together eliminating any pin-holes or "holidays." Use at least 3 coats. Flow on with minimum brushing to prevent dissolving and working up undercoats.

STEEL and ALUMINUM HULLS. Prepare surface with Regatta Vinyltex 50 Wash Primer and four coats of Regatta Vinyltex 53 Zinc Chromate Anti-Corrosive or three coats of Regatta Epoxydur Black. Apply at least two coats of Regatta Vinyltex 55 Anti-Fouling Fast Red.

FIBREGLASS HULLS. Sand thoroughly with medium grit paper and wash with 3840 Fibreglass Solvent. Wash to remove all traces of mold release agent. For added insurance of good adhesion, a coat of REGATTA Fibreglass Primer may be applied next. Then, apply two coats of Vinyltex 55 Anti-Fouling Fast Red.

SPRAYING. Thin 10% in Regatta Vinyltex 54 Solvent for spraying. Wash Equipment with Regatta Vinyltex 54 Solvent.

DRYING TIME. Allow 1 hour between coats and at least 4 hours between the final coat and launch.

Close container after each use.

STORAGE AND DISPOSAL

PESTICIDE: Any of this material, or rinse solvent that cannot be used according to label instructions must be disposed of according to Federal or approved state procedures under Subtitle C of the Resource Conservation and Recovery Act.

CONTAINER: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

1 U.S. GALLON

3.785 LITERS



JOTUN — BALTIMORE COPPER PAINT CO.

BALTIMORE, MD. 21230

ANALYSIS	
VINYLTEX 55 FAST RED ANTI-FOULING	
PIGMENT 58.63%	
Red Iron Oxide	4.86%
Cuprous Oxide	49.24%
Sodium Chromate	0.32%
Inert Ingredients from	
Cuprous Oxide	2.59%
Silicates	1.62%
VEHICLE 41.37%	
Vinyl Chloride Resin	5.18%
Rosin	5.18%
Tricresyl Phosphate	1.89%
Aromatic Hydrocarbons	11.60%
Ketones	17.52%
	100.00%

(V-312)

WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

If in eyes: Flush with plenty of water. Get medical attention.

If on skin: Wash with plenty of soap and water. Get medical attention.

If inhaled: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.