


ESTABLISHED 1870

REGATTA YACHT PAINT


ACTIVE INGREDIENTS
Bis(tri-n-butyltin) Oxide 18.0%
INERT INGREDIENTS 82.0%
100.0%

Vinyltex 57 White Anti-Fouling

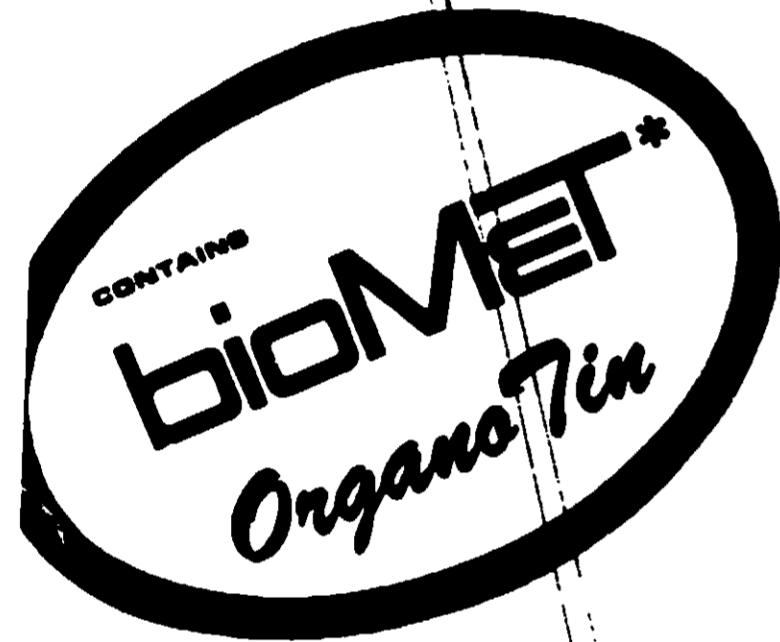

CAUTION: KEEP OUT OF REACH OF CHILDREN. SEE BACK PANEL FOR OTHER CAUTIONS.

1 U.S. GALLON
3.785 LITERS

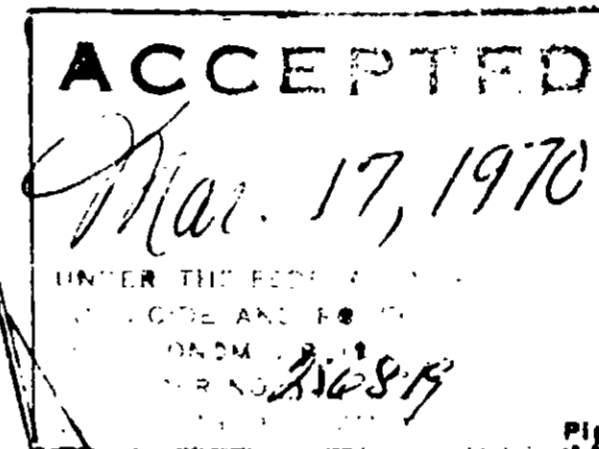

ANALYSIS
VINYLTEX 57 WHITE
Anti-Fouling

| | | |
|---------------------------|-------|--------|
| Pigment | 82.0% | |
| Vehicle | 18.0% | 100.0% |
| PIGMENT | | |
| Titanium Dioxide | 45.0% | |
| Silicates | 37.0% | 100.0% |
| VEHICLE | | |
| Vinyl Resin | 5.8% | |
| Resin | 9.9% | |
| Plasticizer | 1.3% | |
| Ketones | 33.8% | |
| Aromatic Solvents | 32.4% | |
| Bis(tri-n-butyltin) Oxide | 18.0% | 100.0% |

USDA REG. NO. 2568-19

Stir thoroughly before using. May disappear upon stirring. Apply by spray.

Application to Fiberglass: Sand the cloth wet with Regatta 3802 Xylol Epoxydur Undercoat. Allow overnight under the directions for application.

Application to Wood: Apply directly the Vinyltex Organotin Anti-Fouling the Regatta Vinyltex 54 Solvent. Allow overnight dry before launching.

Application to Aluminum: Refer to all types of Aluminum Boats contact your dealer.

Application to Steel: Remove all rust. Wash Primer. Allow 30 minutes between coats. Then apply 2 full coats.

Use Regatta Vinyltex 54 Solvent for cleaning.

IMPORTANT REPAINTING DIRECTIONS: Before repainting the previous season, observe the following:

1. Sand thoroughly to remove old paint.
2. Wash surface with xylol (Regatta 3802) to remove oil and grease that have migrated to the surface.

CAUTION-COMBUSTIBLE Keep away from skin. Causes skin irritation. Avoid contact with contaminated clothing and water. If irritation persists, get medical attention. Do not eat or drink feed products. Because the ingredients are toxic, avoid contact with wet or dry paint.

MANUFACTURED BY

BALTIMORE COPPER PAINT CO.

OLIVER REEDER & SON, INC.

BALTIMORE, MD.

PROPRIETORS

NEW YORK, N. Y.

1870


REGATTA PAINT

ACTIVE INGREDIENTS
Bis(tri-n-butyltin) Oxide 18.0%

INERT INGREDIENTS 96.0%

100.0%

57 Anti-Fouling

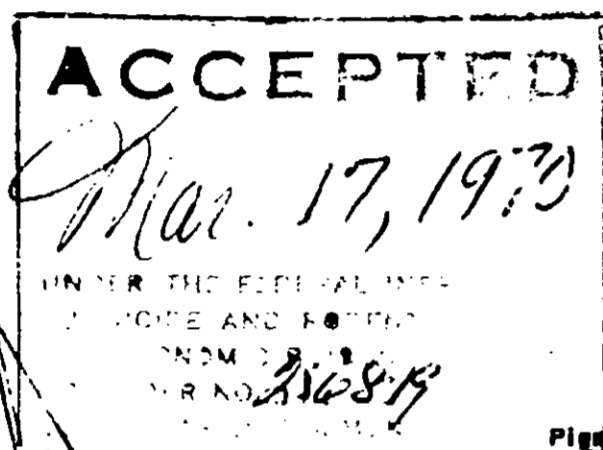

ANALYSIS
VINYLTEX 57 WHITE
Anti-Fouling

| | | |
|---------------------------|-------|--------|
| Pigment | 25.2% | |
| Vehicle | 74.8% | 100.0% |
| PIGMENT | | |
| Titanium Dioxide | 45.0% | |
| Silicates | 55.0% | 100.0% |
| VEHICLE | | |
| Vinyl Resin | 8.8% | |
| Resin | 9.9% | |
| Plasticizer | 1.3% | |
| Ketones | 33.8% | |
| Aromatic Solvents | 32.4% | |
| Bis(tri-n-butyltin) Oxide | 13.8% | 100.0% |

USDA REG. NO. 2568-19

KEEP OUT OF
SEE BACK
CAUTIONS.

LLON

ERS

RED BY
PER PAINT CO.

& SON, INC.

ORS

NEW YORK, N. Y.

DIRECTIONS FOR VINYLTEX ORGANO TIN

Stir thoroughly before using. May develop a jelly-like consistency which does not affect the brushing of the paint and disappears upon stirring. Apply full body. DO NOT THIN unless absolutely necessary for ease of brushing. Do not apply by spray.

Application to Fiberglass: Sand thoroughly, using medium grit paper, completely roughing up the surface, wipe with a cloth wet with Regatta 3802 Xylol Solvent so as to remove all traces of mold release agent. Apply 1 coat of Regatta 3611 Epoxydur Undercoat. Allow overnight dry and then apply 2 coats of Vinyltex OrganoTin Anti-Fouling as specified under the directions for application to wood.

Application to Wood: Apply directly to bare wood. Flow on a full wet coat; avoid brushing as much as possible. If the Vinyltex OrganoTin Anti-Fouling becomes heavy during use due to evaporation of solvent, add a slight amount of the Regatta Vinyltex 54 Solvent. Apply 2 full coats for maximum protection and allow four hours between coats and overnight dry before launching.

Application to Aluminum: Refer to detailed discussion and directions for applying Vinyltex OrganoTin Anti-Fouling Paints to all types of Aluminum Boats contained in the current issue of the REGATTA "Paintenance" booklet available from your dealer.

Application to Steel: Remove all rust and scale either by wire brushing or sand blasting. Apply 1 coat of Regatta 50/51 Wash Primer. Allow 30 minutes for dry and apply three coats of Regatta Vinyltex 53 Zinc Chromate. Allow one hour between coats. Then apply 2 full coats of Vinyltex OrganoTin Anti-Fouling as directed under the application to wood.

Use Regatta Vinyltex 54 Solvent for cleaning of brushes and equipment and for thinning where necessary.

IMPORTANT REPAINTING DIRECTIONS: When repainting bottoms on which Vinyl OrganoTin anti-fouling paint was used the previous season, observe the following special surface preparation to insure good adhesion:

1. Sand thoroughly to remove all chalky, eroding surface layer of paint.
2. Wash surface with xylol (REGATTA 3802 Xylol Solvent) or REGATTA 3800 Thinner to remove OrganoTin which may have migrated to the surface.

CAUTION-COMBUSTIBLE Keep away from heat, sparks, and open flame. Harmful if swallowed. May be absorbed through skin. Causes skin irritation. Avoid breathing spray mist. Do not get in eyes, on skin or on clothing. In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water; for eyes, immediately flush with plenty of water. If irritation persists, get medical attention. Wash contaminated clothing before reuse. Avoid storage near food and feed products. Because the ingredients of this paint may cause allergic reactions to some sensitive skin, avoid prolonged contact with wet or dry paint.