

ESTABLISHED 1870

REGATTA YACHT PAINT

Vinyltex 52 Bright Green Anti-Fouling

**CAUTION: KEEP OUT OF
REACH OF CHILDREN. SEE BACK
PANEL FOR OTHER CAUTIONS.**

1 U.S. GALLON
3.785 LITERS

ACTIVE INGREDIENTS
Bis(tri-n-butyltin) Oxide 18.0%
INERT INGREDIENTS 82.0%
100.0%

ACCEPTED
Mar 17, 1970
US-21

ANALYSIS	
VINYLTEX 52 BRIGHT GREEN A-F	
Pigment	24.8%
Vehicle	75.4%
	100.0%
PIGMENT	
Titanium Calcium	42.0%
Magnesium Silicate	48.0%
Phthalic Cyanine Green	9.0%
	100.0%
VEHICLE	
Vinyl Resin	8.5%
Resin	8.5%
Plasticizer	1.4%
Ketones	34.2%
Aromatic Solvent	34.2%
Bis (tri-n-butyltin) Oxide	13.2%
	100.0%

USDA REG. NO. 2568-21

MANUFACTURED BY

BALTIMORE COPPER PAINT CO.

OLIVER REEDER & SON, INC.

PROPRIETORS

BALTIMORE, MD. 21230

NEW YORK, N.Y. 10038

DIREC

Stir thoroughly before using. May develop a skin which disappears upon stirring. Apply full body.

Application to Fiberglass: Sand thoroughly with Regatta 3802 Xylol Solvent. Apply Epoxydur Undercoat. Allow overnight dry under the directions for application to fiberglass.

Application to Wood: Apply directly to the Vinyltex OrganoTin Anti-Fouling before the Regatta Vinyltex 54 Solvent. Apply overnight dry before launching.

Application to Aluminum: Refer to details for application to all types of Aluminum Boats contained in your dealer.

Application to Steel: Remove all rust and scale. Wash Primer. Allow 30 minutes for dry between coats. Then apply 2 full coats of Vinyltex 52.

Use Regatta Vinyltex 54 Solvent for cleaning.

IMPORTANT REPAINTING DIRECTIONS: When repainting over the previous season, observe the following:

1. Sand thoroughly to remove all chalking.
2. Wash surface with xylol (REGATTA 3802) to remove any fouling that have migrated to the surface.

CAUTION! COMBUSTIBLE! Keep away from fire. Do not be absorbed through skin. Cause irritation to skin or on clothing. In case of contact with skin with soap and water; for contact with eyes, seek medical attention. Wash contact areas with soap and water. Avoid prolonged contact with water.

D 1870

REGATTA PAINT


x 52 Anti-Fouling

KEEP OUT OF
SEE BACK
CAUTIONS

LON
ERS

PRODUCED BY
PER PAINT CO.
& SON, INC.
NEW YORK, N.Y. 10038

ACTIVE INGREDIENTS
Bis(tri-n-butyltin) Oxide 10.0%
INERT INGREDIENTS 90.0%
100.0%

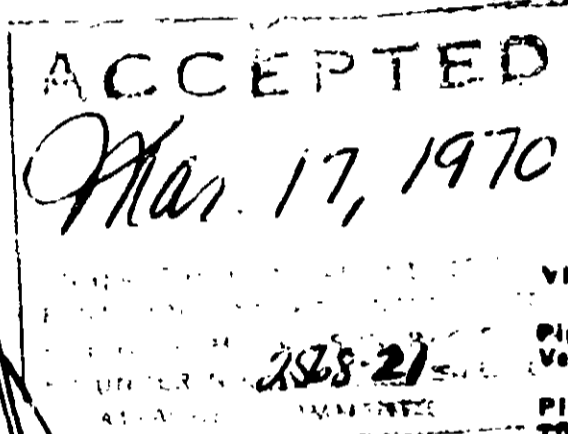

ANALYSIS
VINYLTEX 52 BRIGHT GREEN
A-F

Pigment	24.0%	
Vehicle	75.4%	100.0%
PIGMENT		
Titanium Calcium	42.0%	
Magnesium Silicate	48.0%	
Phthalic Cyanine Green	8.0%	100.0%
VEHICLE		
Vinyl Resin	8.5%	
Resin	8.5%	
Plasticizer	1.4%	
Ketones	34.2%	
Aromatic Solvent	34.2%	
Bis (tri-n-butyltin) Oxide	13.2%	100.0%

USDA REG. NO. 2568-21

DIRECTIONS FOR VINYLTEX ORGANO TIN

Stir thoroughly before using. May develop a jelly-like consistency which does not affect the brushing of the paint and disappears upon stirring. Apply full body. DO NOT THIN unless absolutely necessary for ease of brushing. Do not apply by spray.

Application to Fiberglass: Sand thoroughly, using medium grit paper, completely roughing up the surface, wipe with a cloth wet with Regatta 3802 Xylol Solvent so as to remove all traces of mold release agent. Apply 1 coat of Regatta 3611 Epoxydur Undercoat. Allow overnight dry and then apply 2 coats of Vinyltex OrganoTin Anti-Fouling as specified under the directions for application to wood.

Application to Wood: Apply directly to bare wood. Flow on a full wet coat; avoid brushing as much as possible. If the Vinyltex OrganoTin Anti-Fouling becomes heavy during use due to evaporation of solvent, add a slight amount of the Regatta Vinyltex 54 Solvent. Apply 2 full coats for maximum protection and allow four hours between coats and overnight dry before launching.

Application to Aluminum: Refer to detailed discussion and directions for applying Vinyltex OrganoTin Anti-Fouling Paints to all types of Aluminum Boats contained in the current issue of the REGATTA "Paintenance" booklet available from your dealer.

Application to Steel: Remove all rust and scale either by wire brushing or sand blasting. Apply 1 coat of Regatta 50/51 Wash Primer. Allow 30 minutes for dry and apply three coats of Regatta Vinyltex 53 Zinc Chromate. Allow one hour between coats. Then apply 2 full coats of Vinyltex OrganoTin Anti-Fouling as directed under the application to wood.

Use Regatta Vinyltex 54 Solvent for cleaning of brushes and equipment and for thinning where necessary.

IMPORTANT REPAINTING DIRECTIONS: When repainting bottoms on which Vinyl OrganoTin anti-fouling paint was used the previous season, observe the following special surface preparation to insure good adhesion:

1. Sand thoroughly to remove all chalky, eroding surface layer of paint.
2. Wash surface with xylol (REGATTA 3802 Xylol Solvent) or REGATTA 3800 Thinner to remove OrganoTin which may have migrated to the surface.

CAUTION! COMBUSTIBLE! Keep away from heat, sparks and open flame. Harmful if swallowed. May be absorbed through skin. Causes skin irritation. Avoid breathing spray mist. Do not get in eyes, on skin or on clothing. In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water; for eyes, immediately flush with plenty of water. If irritation persists, get medical attention. Wash contaminated clothing before reuse. Avoid storage near food and feed products. Because the ingredients of this paint may cause allergic reactions to some sensitive skin, avoid prolonged contact with wet or dry paint. (A)