

ESTABLISHED 1870

REGATTA YACHT PAINT

Vinyltex 58 Scarlet Anti-Fouling


ACTIVE INGREDIENTS
Bis(tri-n-butyltin) Oxide 18.0%
INERT INGREDIENTS 82.0%
100.0%

ACCEPTED
Mar. 17, 1970
UNDER THE REGULATIONS OF THE
FEDERAL BUREAU OF INVESTIGATION
FOR THE PROTECTION OF THE CONSUMER
UNDER AUTHORITY OF THE
FEDERAL TRADE COMMISSION

ANALYSIS
VINYLTEX 58 SCARLET
ANTI-FOULING


| | | |
|----------------------------|-------|--------|
| Pigment | 23.0% | |
| Vehicle | 77.0% | 100.0% |
| PIGMENT | | |
| Lithol Rubine | 12.2% | |
| Molybdate Orange | 36.2% | |
| Silicates | 51.6% | 100.0% |
| VEHICLE | | |
| Vinyl Resin | 8.0% | |
| Rosin | 9.9% | |
| Plasticizer | 1.3% | |
| Ketenes | 33.8% | |
| Aromatic Solvents | 32.4% | |
| Bis (tri-n-butyltin) Oxide | 13.0% | 100.0% |

USDA REG. NO. 2588-22

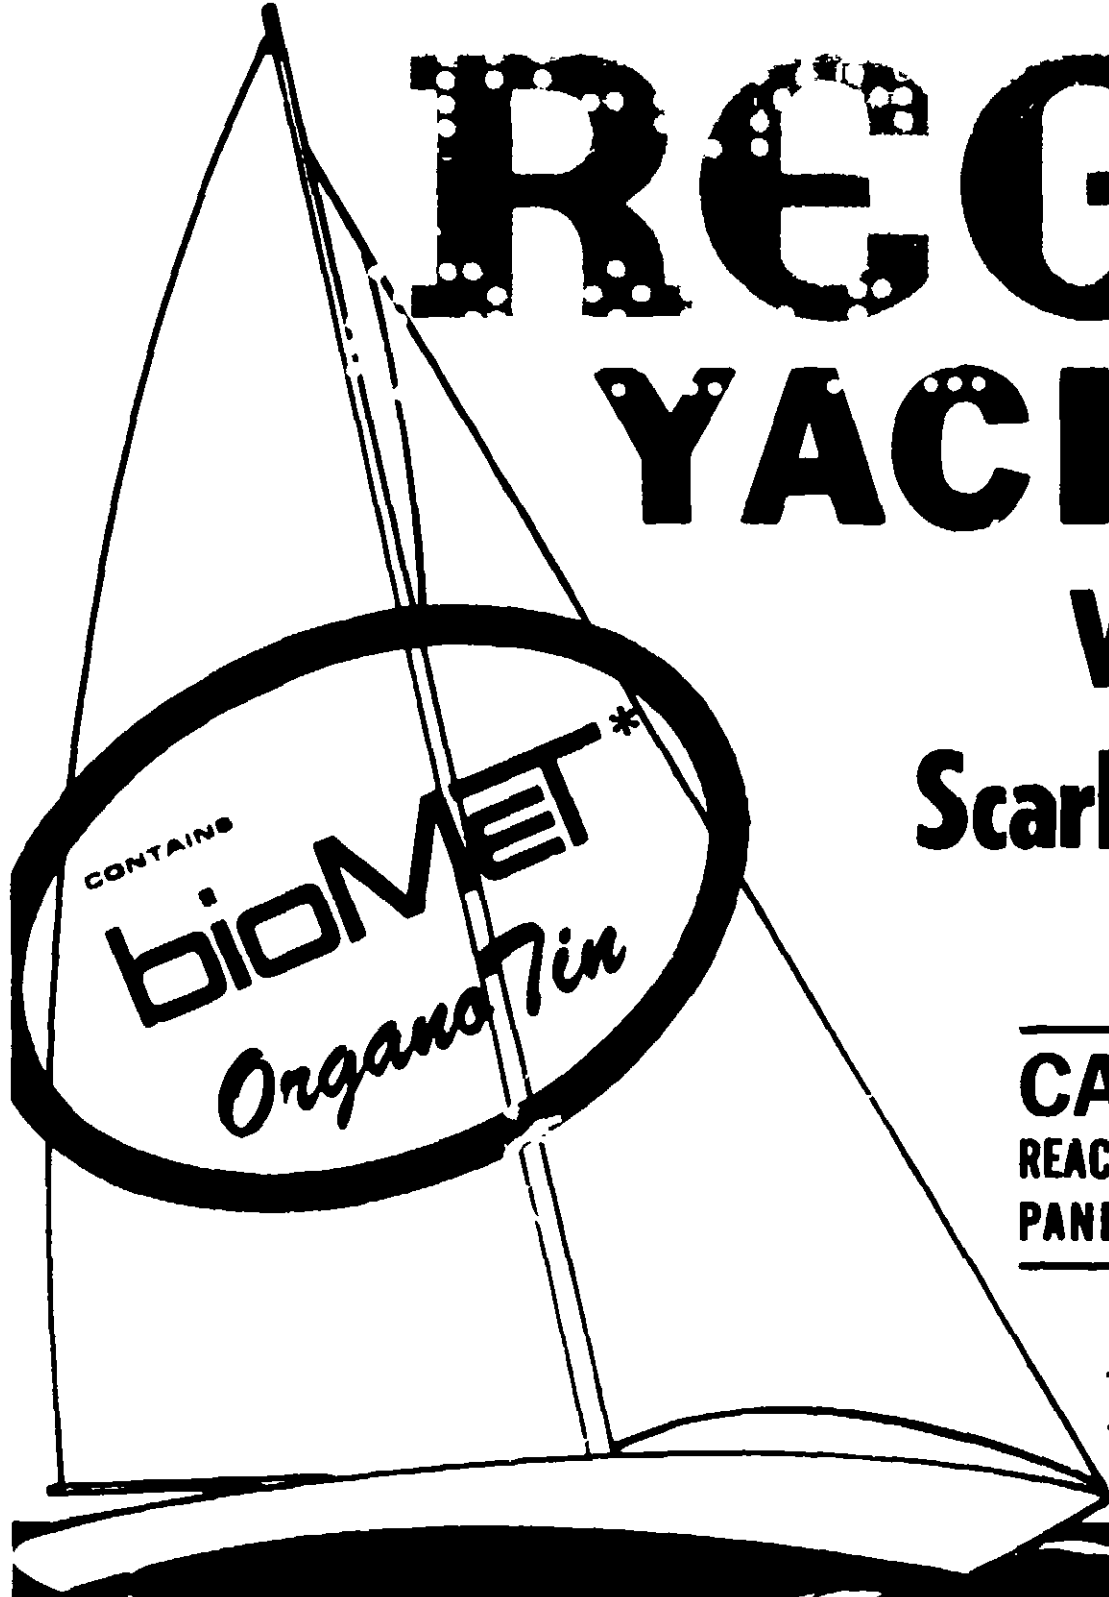

CAUTION: KEEP OUT OF REACH OF CHILDREN. SEE BACK PANEL FOR OTHER CAUTIONS.

1 U.S. GALLON
3.785 LITERS

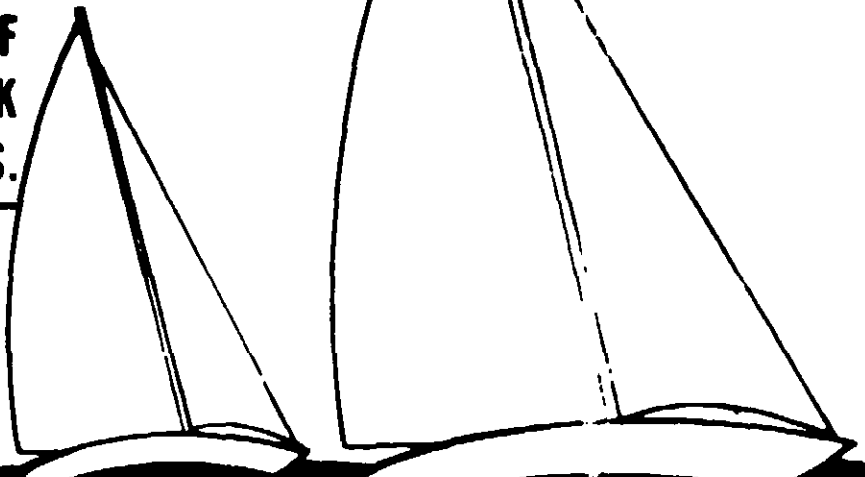

DIRECTI

Stir thoroughly before using. May develop skin rash. Disappears upon stirring. Apply full body. Do not breathe vapors.

Application to Fiberglass: Sand thoroughly, cloth wet with Regatta 3802 Xylol Solvent and Epoxydur Undercoat. Allow overnight dry under the directions for application to wood.

Application to Wood: Apply directly to bare wood. The Vinyltex OrganoTin Anti-Fouling becomes the Regatta Vinyltex 54 Solvent. Apply 2 full coats overnight dry before launching.

Application to Aluminum: Refer to detailed instructions for application to all types of Aluminum Boats contained in your dealer's literature.

Application to Steel: Remove all rust and scale with Wash Primer. Allow 30 minutes for dry before applying. Then apply 2 full coats of Regatta Vinyltex 58 Scarlet Anti-Fouling. Use Regatta Vinyltex 54 Solvent for cleaning.

IMPORTANT REPAINTING DIRECTIONS: When repainting over the previous season, observe the following:

1. Sand thoroughly to remove all chalking.
2. Wash surface with xylol (REGATTA 3802) to remove any fouling that have migrated to the surface.

CAUTION-COMBUSTIBLE Keep away from heat and open flame. Causes skin irritation. Avoid breathing vapors. Remove contaminated clothing and immediately wash with soap and water. If irritation persists, get medical attention. Do not eat, drink, or use tobacco products. Because the ingredients of this paint are toxic, avoid contact with wet or dry paint.

MANUFACTURED BY BALTIMORE COPPER PAINT CO.

OLIVER REEDER & SON, INC.
PROPRIETORS

BALTIMORE, MD. 21230


NEW YORK, N.Y. 10038

ESTABLISHED 1870

REGATTA ANTI-FOULING PAINT

Vinyltex 58 Anti-Fouling

ACTIVE INGREDIENTS
Bis(tri-n-butyltin) Oxide 10.0%
INERT INGREDIENTS 90.0%
100.0%

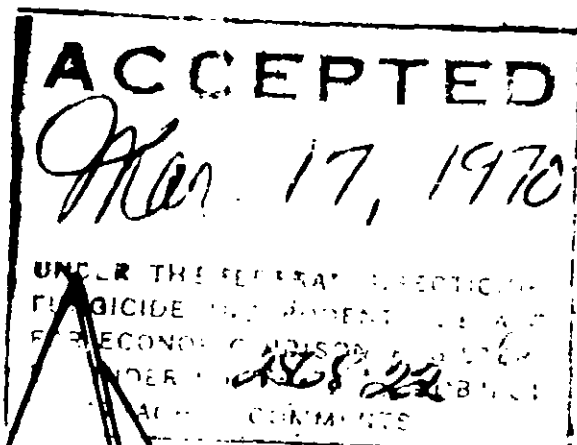

ANALYSIS
VINYLTEX 58 SCARLET
ANTI-FOULING

| | | |
|----------------------------|-------|--------|
| Pigment | 23.0% | |
| Vehicle | 77.0% | 100.0% |
| PIGMENT | | |
| Lithol Rubine | 12.2% | |
| Molybdate Orange | 36.2% | |
| Silicates | 51.6% | 100.0% |
| VEHICLE | | |
| Vinyl Resin | 8.0% | |
| Resin | 8.0% | |
| Plasticizer | 1.3% | |
| Ketenes | 33.8% | |
| Aromatic Solvents | 32.4% | |
| Bis (tri-n-butyltin) Oxide | 13.0% | 100.0% |

USDA REG. NO. 2568-22

CAUTION: KEEP OUT OF
REACH OF CHILDREN. SEE BACK
FOR OTHER CAUTIONS.

1.5 GALLON
5.7 LITERS

MANUFACTURED BY
COPPER PAINT CO.
FREDERICK & SON, INC.
PROPRIETORS
NEW YORK, N.Y. 10038

DIRECTIONS FOR VINYLTEX ORGANO TIN

Stir thoroughly before using. May develop a jelly-like consistency which does not affect the brushing of the paint and disappears upon stirring. Apply full body. DO NOT THIN unless absolutely necessary for ease of brushing. Do not apply by spray.

Application to Fiberglass: Sand thoroughly, using medium grit paper, completely roughing up the surface, wipe with a cloth wet with Regatta 3802 Xylol Solvent so as to remove all traces of mold release agent. Apply 1 coat of Regatta 3611 Epoxydur Undercoat. Allow overnight dry and then apply 2 coats of Vinyltex OrganoTin Anti-Fouling as specified under the directions for application to wood.

Application to Wood: Apply directly to bare wood. Flow on a full wet coat; avoid brushing as much as possible. If the Vinyltex OrganoTin Anti-Fouling becomes heavy during use due to evaporation of solvent, add a slight amount of the Regatta Vinyltex 54 Solvent. Apply 2 full coats for maximum protection and allow four hours between coats and overnight dry before launching.

Application to Aluminum: Refer to detailed discussion and directions for applying Vinyltex OrganoTin Anti-Fouling Paints to all types of Aluminum Boats contained in the current issue of the REGATTA "Paintenance" booklet available from your dealer.

Application to Steel: Remove all rust and scale either by wire brushing or sand blasting. Apply 1 coat of Regatta 50/51 Wash Primer. Allow 30 minutes for dry and apply three coats of Regatta Vinyltex 53 Zinc Chromate. Allow one hour between coats. Then apply 2 full coats of Vinyltex OrganoTin Anti-Fouling as directed under the application to wood.

Use Regatta Vinyltex 54 Solvent for cleaning of brushes and equipment and for thinning where necessary.

IMPORTANT REPAINTING DIRECTIONS: When repainting bottoms on which Vinyl OrganoTin anti-fouling paint was used the previous season, observe the following special surface preparation to insure good adhesion:

1. Sand thoroughly to remove all chalky, eroding surface layer of paint.
2. Wash surface with xylol (REGATTA 3802 Xylol Solvent) or REGATTA 3800 Thinner to remove OrganoTin which may have migrated to the surface.

CAUTION-COMBUSTIBLE Keep away from heat, sparks, and open flame. Harmful if swallowed. May be absorbed through skin. Causes skin irritation. Avoid breathing spray mist. Do not get in eyes, on skin or on clothing. In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water; for eyes, immediately flush with plenty of water. If irritation persists, get medical attention. Wash contaminated clothing before reuse. Avoid storage near food and feed products. Because the ingredients of this paint may cause allergic reactions to some sensitive skin, avoid prolonged contact with wet or dry paint.