

ESTABLISHED 1870

# REGATTA YACHT PAINT

ACTIVE INGREDIENTS	
Bis (tri-n-butyltin)	8.3%
Oxide	91.7%
INERT INGREDIENTS	<u>100.0%</u>

## Vinytlex 56

## Golden Yellow Anti-Fouling

CONTAINS  
**bioMET\***  
*Organotin*

4-8-71  
2568-25

**CAUTION: KEEP OUT OF  
REACH OF CHILDREN. SEE BACK  
PANEL FOR OTHER CAUTIONS.**

**1 U.S. GALLON  
3.785 LITERS**


ANALY  
VINYL  
GOLDEN Y  
ANTI-FOU

Pigment  
Vehicle

PIGMENT  
Titanium Calcium  
Chrome Yellow  
Silicates

VEHICLE  
Vinyl Resin  
Resin  
Plasticizer  
Ketones  
Aromatic Solvents  
Bis (tri-n-butyltin)  
Oxide

USDA REG. N

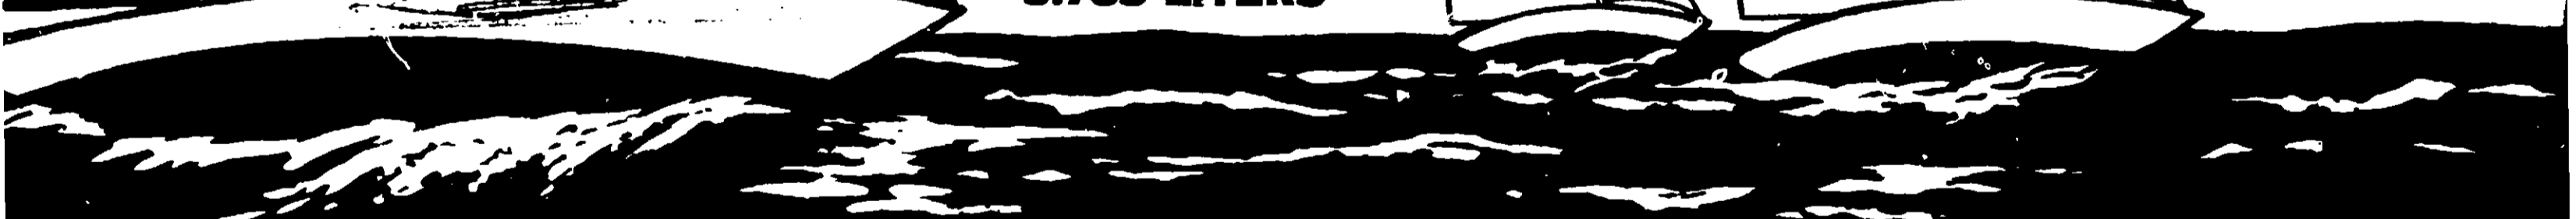

MANUFACTURED BY  
**BALTIMORE COPPER PAINT CO.**

**OLIVER REEDER & SON, INC.**

PROPRIETORS

NEW YORK, N.Y. 10038

BALTIMORE, MD. 21230

## DIRECTIONS FOR VINYLTEX<sup>®</sup> ANTI-FOULING PAINTS CONTAINING

Stir thoroughly before using. May develop a jelly-like consistency which does not affect the brushing upon stirring. Apply full body. DO NOT THIN unless absolutely necessary for ease of brushing. Do not use respirator is worn and face, arms and hands are protected from contact with the paint.

**Application to Fibreglass:** Sand thoroughly, using medium grit paper, completely roughing up the surface. Wash wet with Regatta 3830 Fibreglass Solvent Wash so as to remove all traces of mold release agent. Apply Regatta 3331 Fibreglass Primer. Allow 1 hour to dry and then apply 2 coats of this Vinyltex Anti-Fouling Paint in the directions for application to wood.

**Application to Wood:** Apply directly to bare wood. Flow on a full wet coat; avoid brushing as much as possible. Anti-Fouling Paint becomes heavy during use due to evaporation of solvent, add a slight amount of Solvent. Apply 2 full coats for maximum protection and allow four hours between coats and overnight to dry.

**Application to Aluminum:** Refer to detailed discussion and directions for applying Vinyltex Anti-Fouling Paint to all types of Aluminum Boats contained in the current issue of the REGATTA "Paintenance"

**Steel:** It is important that an adequate barrier coat be established between bare steel and the REGATTA "Paintenance" Booklet for details on this. The booklet is available from Regatta Vinyltex 54 Solvent for cleaning of brushes and equipment and for thinning where necessary.

**PERMANENT REPAINTING DIRECTIONS:** When repainting bottoms on which Vinyl Organo-Tin anti-fouling paint was used in the previous season, observe the following special surface preparation to insure good adhesion:

1. Sand thoroughly to remove all chalky, eroding surface layer of paint.
2. Wash surface with xylol (REGATTA 3802 Xylol Solvent) or REGATTA 3830 Fibreglass Solvent which may have migrated to the surface.

**CAUTION! COMBUSTIBLE!** Keep away from heat, sparks and open flame. Harmful if inhaled. Do not be absorbed through skin. Causes skin irritation. Avoid breathing spray mist. Do not get on skin or on clothing. In case of skin contact, remove contaminated clothing and wash skin with soap and water; for eyes, immediately flush with plenty of water. If irritation persists, seek medical attention. Wash contaminated clothing before reuse. Avoid storage near food and drink. Because the ingredients of this paint may cause allergic reactions to some sensitive persons, do not use with wet or dry paint.

<b>ACTIVE INGREDIENTS</b>	
Bis (tri-n-butyltin) Oxide	8.3%
<b>INERT INGREDIENTS</b>	91.7%
	<hr/>
	100.0%

<b>ANALYSIS</b>	
<b>VINYLTEx 56</b>	
<b>GOLDEN YELLOW</b>	
<b>ANTI-FOULING</b>	
Pigment	27.0%
Vehicle	73.0%
	<hr/>
	100.0%
<b>PIGMENT</b>	
Titanium Calcium	23.0%
Chrome Yellow	38.5%
Silicates	38.5%
	<hr/>
	100.0%
<b>VEHICLE</b>	
Vinyl Resin	10.0%
Resin	8.6%
Plasticizer	2.0%
Ketones	34.0%
Aromatic Solvents	34.0%
Bis (tri-n-butyltin) Oxide	11.4%
	<hr/>
	100.0%

USDA REG. NO. 2568-25



**INT CO.**

NEW YORK, N.Y. 10038