

ESTABLISHED 1870

ROGALTA

YACHT PAINT

Vinyltex 60


Black Anti-Fouling

Bis (tri-n-butyl) Oxide	8.3%
INCOMPATIBLE	91.7%
	100.0%

ACCEPTED


November 10, 1972

U.S. DEPARTMENT OF AGRICULTURE
 NATIONAL PESTICIDE ADMINISTRATION
 REGISTERED

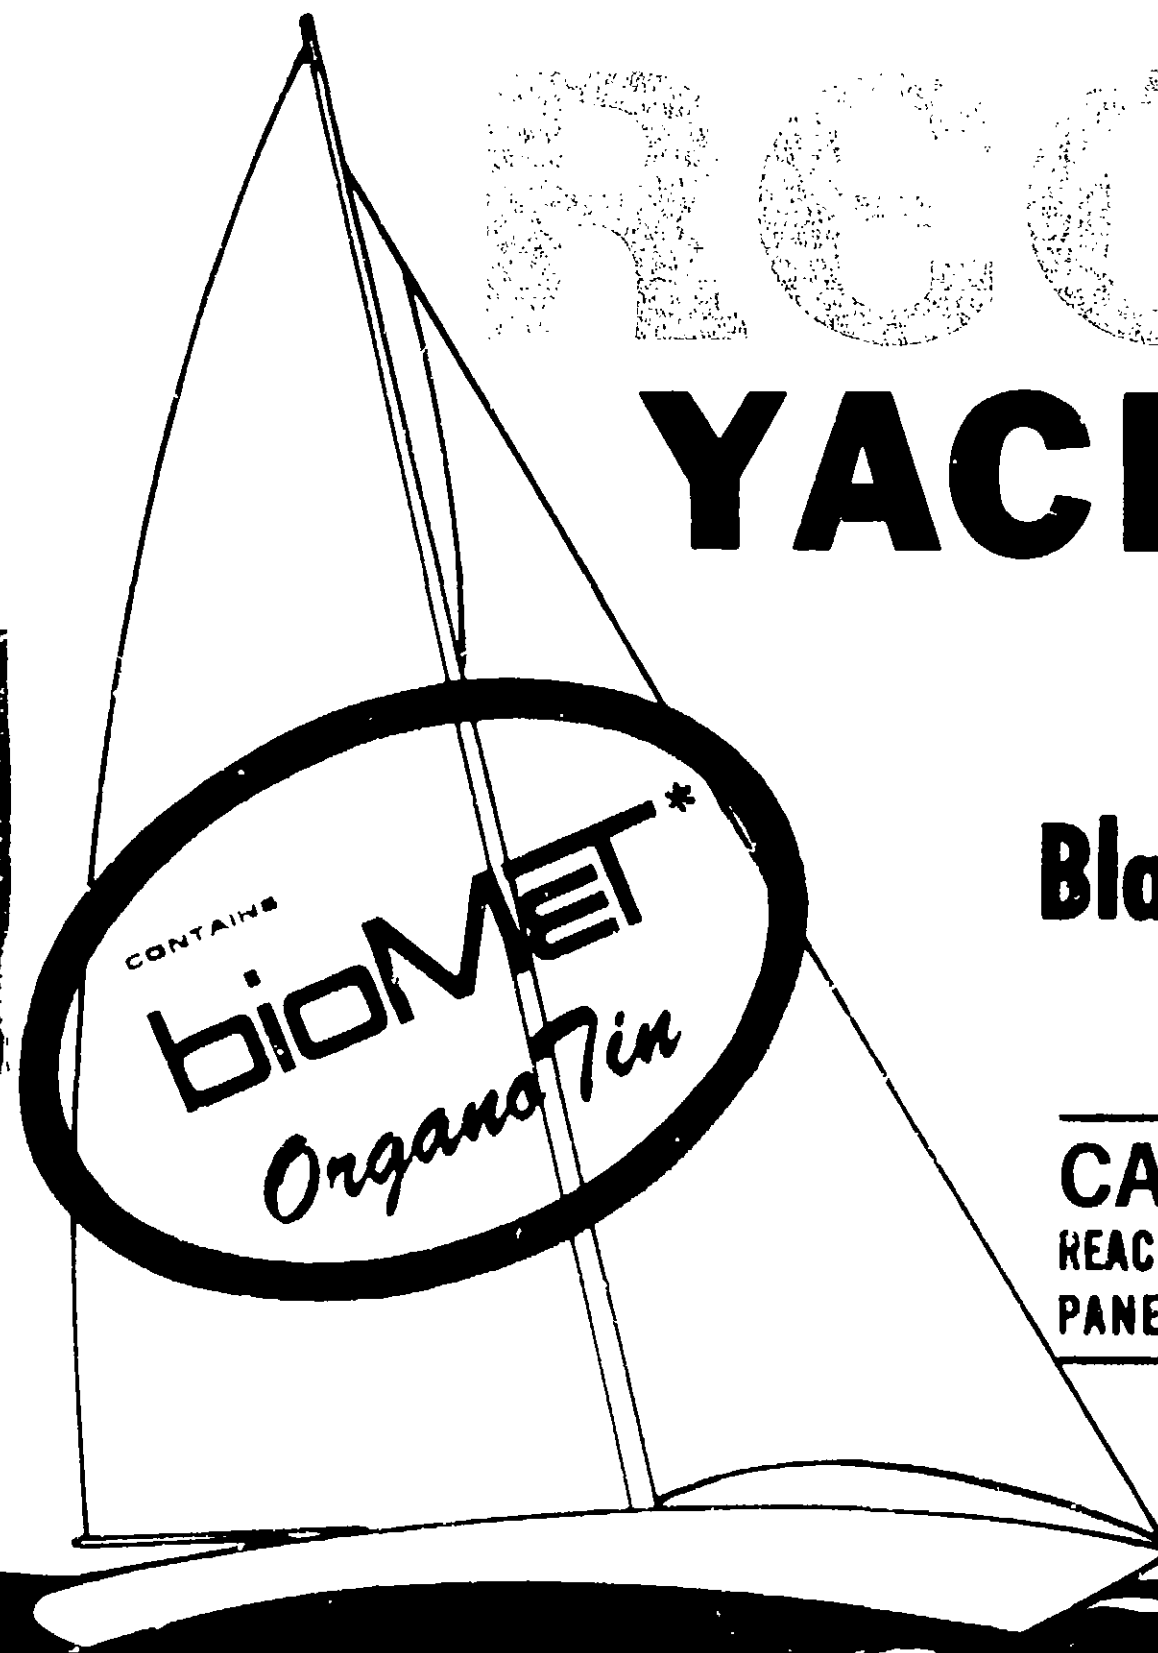

CAUTION: KEEP OUT OF REACH OF CHILDREN. SEE BACK PANEL FOR OTHER CAUTIONS.

1 U.S. GALLON
3.785 LITERS

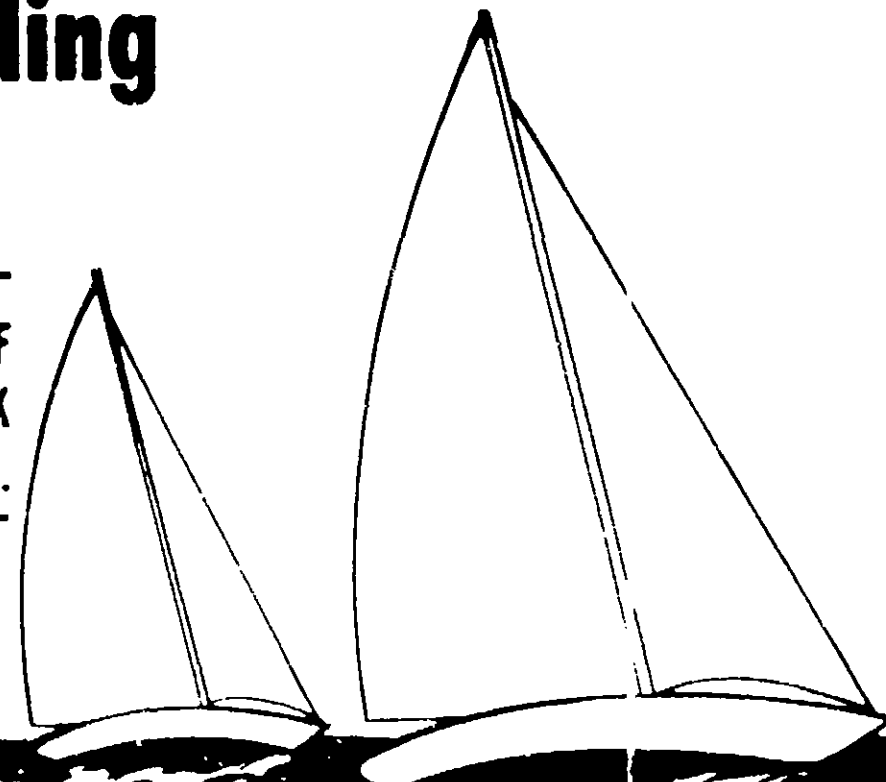

ANALYSIS

PIGMENT	4.4%
Vehicle	
PIGMENT	
Lampblack	
Silicates	
VEHICLE	
Vinyl Resin	
Resin	
Plasticizer	
Ketones	
Aromatic	
Solvents	
Bis (tri-n-butyltin) oxide	

USDA REG. N

*Trademark of M&T Chemicals Inc.

MANUFACTURED BY


BALTIMORE COPPER PAINT CO.

OLIVER REEDER & SON, INC.
PROPRIETORS

BALTIMORE, MD. 21230

NEW YORK, N.Y. 10038

INT

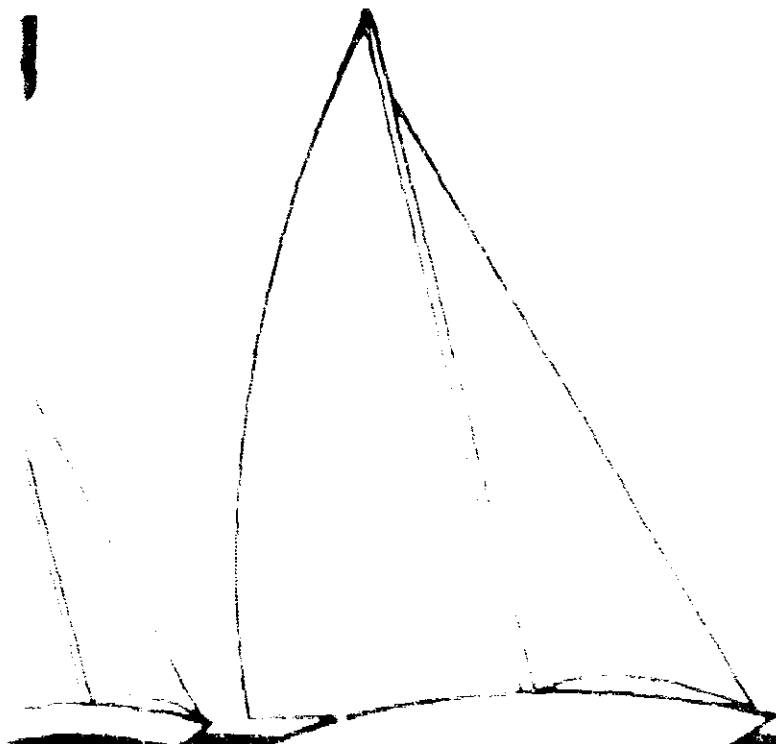

ANALYSIS VINYLTEX 80 BLACK A-F

Pigment	24.4%
Vehicle	75.6%

PIGMENT	
Lampblack	13.2%
Silicates	86.8%

VEHICLE	
Vinyl Resin	9.1%
Rosin	17.8%
Plasticizer	1.5%
Ketones	31.7%
Aromatic Solvents	31.0%
Bis (tri-n-butyltin) oxide	10.9%

USDA REG. NO. 2568-38

DIRECTIONS FOR VINYLTEX ANTI-FOULING PAINTS CONTAINING ORGANO-TIN

Stir thoroughly before using. May develop a jelly like consistency which does not affect the brushing of the paint and disappears upon stirring. Apply full body. DO NOT THIN unless absolutely necessary for ease of brushing. Do not apply by spray unless a respirator is worn and face, arms and hands are protected from contact with the paint.

Application to Fibreglass: Sand thoroughly, using medium grit paper, completely roughing up the surface, wipe with a cloth wet with Regatta 3830 Fibreglass Solvent Wash so as to remove all traces of mold release agent. Apply 1 coat of Regatta 3330/3331 Fibreglass Primer. Allow overnight dry and then apply 2 coats of this Vinyltex Anti-Fouling Paint as specified under the directions for application to wood.

Application to Wood: Apply directly to bare wood. Flow on a full wet coat; avoid brushing as much as possible. If this Vinyltex Anti-Fouling Paint becomes heavy during use due to evaporation of solvent, add a slight amount of the Regatta Vinyltex 54 Solvent. Apply 2 full coats for maximum protection and allow four hours between coats and overnight dry before launching.

Application to Aluminum: Refer to detailed discussion and directions for applying Vinyltex Anti-Fouling Paints containing Organo-Tin to all types of Aluminum Boats contained in the current issue of the REGATTA "Paintenance" booklet available from your dealer.

Application to Steel: It is important that an adequate barrier coat be established between bare steel and any anti-fouling coating. Refer to the REGATTA "Paintenance" Booklet for details on this. The booklet is available from your dealer.

Use Regatta Vinyltex 54 Solvent for cleaning of brushes and equipment and for thinning where necessary.

IMPORTANT REPAINTING DIRECTIONS: When repainting bottoms on which Vinyl Organo-Tin anti-fouling paint was used the previous season, observe the following special surface preparation to insure good adhesion:

1. Sand thoroughly to remove all chalky, eroding surface layer of paint.
2. Wash surface with xylol. REGATTA 3802 Xylol Solvent or REGATTA 3830 Fibreglass Solvent Wash to remove Organo-Tin which may have migrated to the surface.

[Faint, illegible text, possibly bleed-through from the reverse side of the page.]

BY
ER PAINT CO.
SON, INC.
NEW YORK, N.Y. 10038